


Luminaire

Code M250611
Name TAGORA 270 INCASSO LED wide flood 3000K ARANCIONE

Measurem.

Code FTS1502673
Name TAGORA 270 INCASSO LED wide flood 3000K ARANCIONE

Luminaire Flux	1635.80 lm	Luminaire Power	34.00 W	Efficacy	48.11 lm/W	Efficiency	100.00%
Lamps Flux	1635.80 lm	Maximum value	3226.59 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam.	270 mm	Height	330 mm		
		Diam.	100 mm	Height	0 mm		
Horizontal Luminous Area	0.007854 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001900 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	17-06-2015			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	1635.80 lm		
LED Flux=3798lm LED Power=31W Eff=43% EfcLed=123lm/W EfcLum=48lm/W CCT=3000 Ra=90 SDCM=1 L70(6K)=50000h							
C.I.E.	99 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

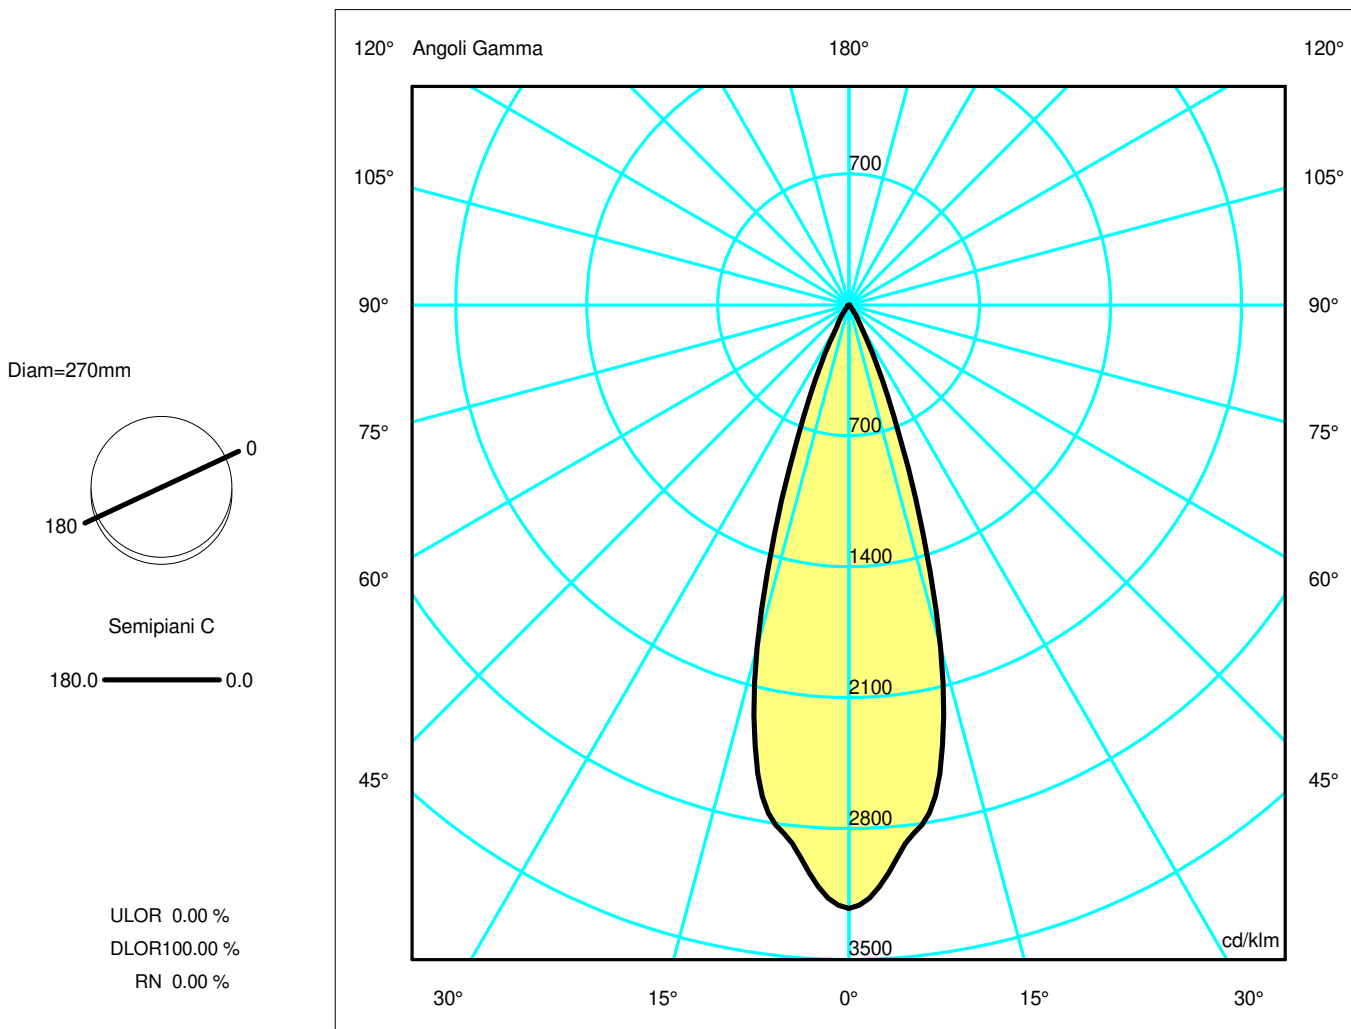

Luminaire

Code M250611
Name TAGORA 270 INCASSO LED wide flood 3000K ARANCIONE

Measurement

Code FTS1502673
Name TAGORA 270 INCASSO LED wide flood 3000K ARANCIONE

Luminaire Flux	1635.80 lm	Luminaire Power	34.00 W	Efficacy	48.11 lm/W	Efficiency	100.00%
Lamps Flux	1635.80 lm	Maximum value	3226.59 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	270 mm	Height	330 mm		
Round Luminous Area		Diam.	100 mm	Height	0 mm		
Horizontal Luminous Area		0.007854 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001900 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		17-06-2015		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1635.80 lm	


LED Flux=3798lm LED Power=31W Eff=43% EfcLed=123lm/W EfcLum=48lm/W CCT=3000 Ra=90 SDCM=1 L70(6K)=50000h

C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.29	0.59	0.88	1.18	1.47	OC	0.29	0.59	0.88	1.18	1.47
OB	0.29	0.59	0.88	1.18	1.47	OD	0.29	0.59	0.88	1.18	1.47

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5278.05	4851.79	3099.07	594.42	80.82	12.80	7.89	4.39	2.18	0.72
OB	5278.05	4851.79	3099.07	594.42	80.82	12.80	7.89	4.39	2.18	0.72
OC	5278.05	4851.79	3099.07	594.42	80.82	12.80	7.89	4.39	2.18	0.72
OD	5278.05	4851.79	3099.07	594.42	80.82	12.80	7.89	4.39	2.18	0.72

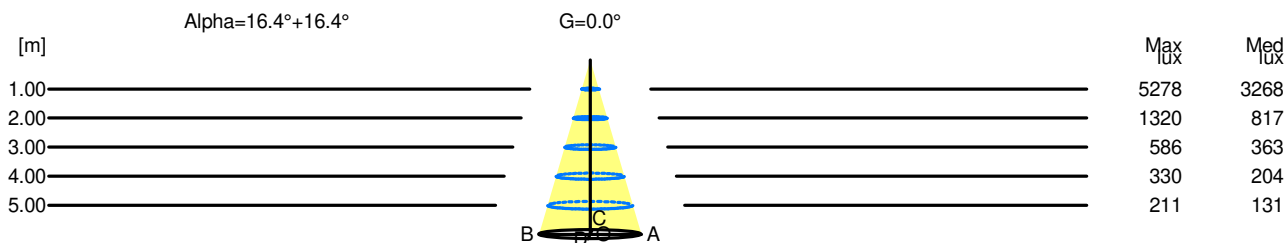

H[m]	D[m]	Max lux	Med lux	Alpha=16.4°+16.4°	G=0.0
1.00	0.59	5278	3268		
2.00	1.18	1320	817		
3.00	1.76	586	363		
4.00	2.35	330	204		
5.00	2.94	211	131		