

## Luminaire

Code M256225\_0°  
Name EVERY 105 TD TR OR LED 3000K 2X22°NE/B\_0°

## Measurement

Code FTS2400243.  
Name EVERY 105 TD TR OR LED 3000K 2X22°NE/B\_0°

Luminaire Flux	658 lm	Luminaire Power	10.0 W	Efficacy	65.800 lm/W	Efficiency	100.00%
Source Flux	658 lm	Maximum value	1634.48 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	85 mm	Height	130 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001216 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		658 lm	
LED Flux=1556lm LED Power=10W Eff=42% EfcLed=156lm/W EfcLum=66lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	98 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		


Diam=85mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

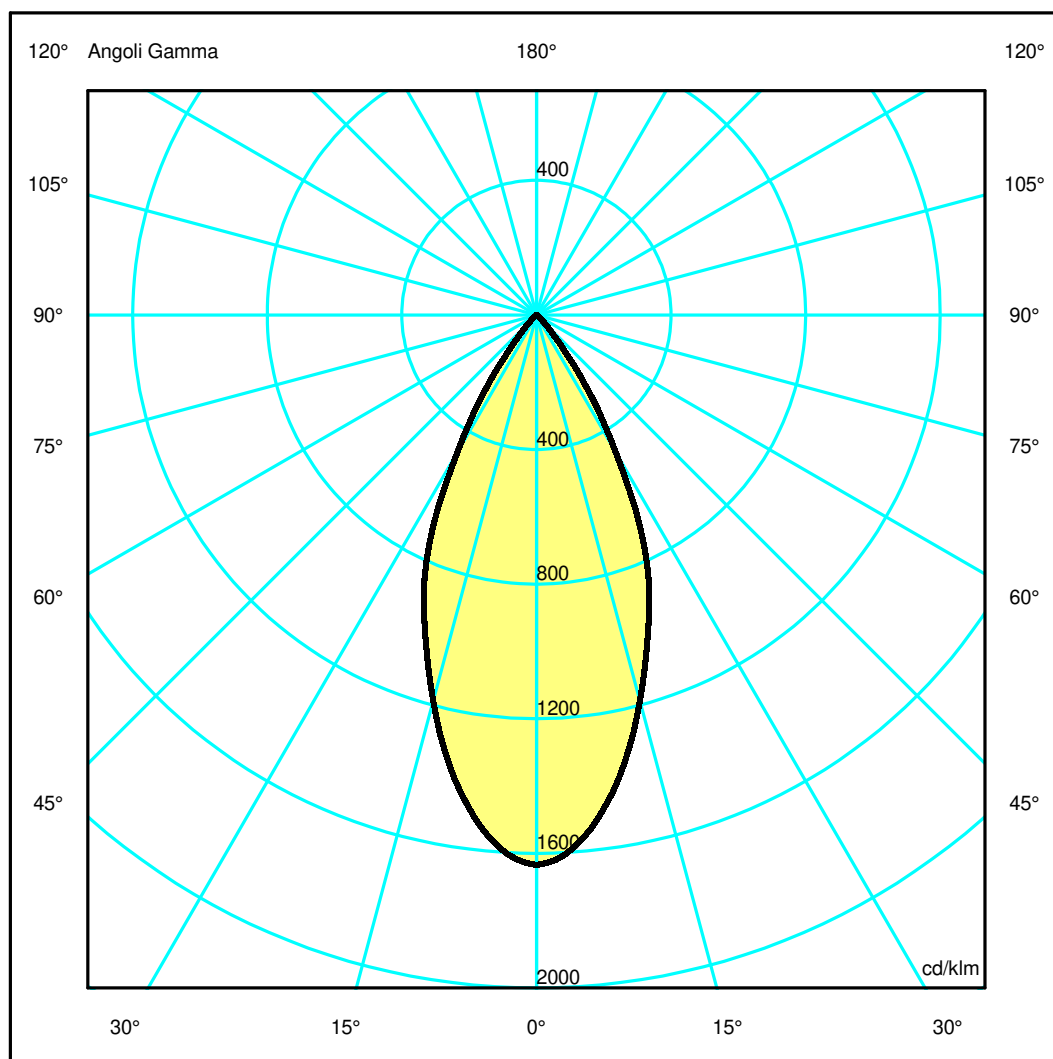

## Luminaire

Code M256225\_0°  
Name EVERY 105 TD TR OR LED 3000K 2X22°NE/B\_0°

## Measurerm.


Code FTS2400243.  
Name EVERY 105 TD TR OR LED 3000K 2X22°NE/B\_0°

Luminaire Flux	658 lm	Luminaire Power	10.0 W	Efficacy	65.800 lm/W	Efficiency	100.00%
Source Flux	658 lm	Maximum value	1634.48 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	85 mm	Height	130 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001216 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		658 lm	
LED Flux=1556lm LED Power=10W Eff=42% EfcLed=156lm/W EfcLum=66lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.44	0.88	1.32	1.76	2.20	OC	0.44	0.88	1.32	1.76	2.20
OB	0.44	0.88	1.32	1.76	2.20	OD	0.44	0.88	1.32	1.76	2.20

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1075.49	1028.59	780.90	497.20	163.94	21.45	1.51	0.56	0.29	0.20
OB	1075.49	1028.59	780.90	497.20	163.94	21.45	1.51	0.56	0.29	0.20
OC	1075.49	1028.59	780.90	497.20	163.94	21.45	1.51	0.56	0.29	0.20
OD	1075.49	1028.59	780.90	497.20	163.94	21.45	1.51	0.56	0.29	0.20

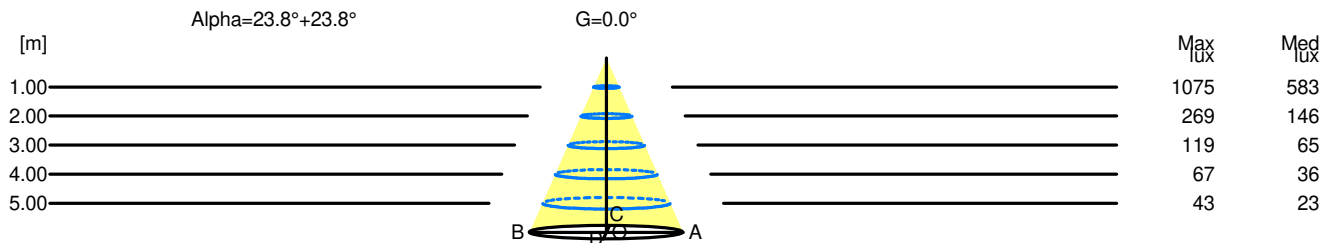

H[m]	D[m]	Max lux	Med lux	Alpha=23.8°+23.8°	G=0.0
1.00	0.88	1075	583		
2.00	1.76	269	146		
3.00	2.64	119	65		
4.00	3.53	67	36		
5.00	4.41	43	23		