


## Luminaire

Code M274605\_30°  
Name EVERY 80 SQ TS OR LED3000K 2X22° M\_30°


## Measurerm.

Code FTS2400185.  
Name EVERY 80 SQ TS OR LED3000K 2X22° M\_30°

Luminaire Flux	919 lm	Luminaire Power	10.0 W	Efficacy	91.900 lm/W	Efficiency	100.00%
Source Flux	919 lm	Maximum value	1110.11 cd/klm	Position	C=0.00 G=27.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	80 mm	Width	80 mm	Height	115 mm
Rectangular Luminous Area		Length	60 mm	Width	60 mm	Height	0 mm
Horizontal Luminous Area		0.003600 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°	0.000871 m2		
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		20-05-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		919 lm	
LED Flux=1556lm LED Power=10W Eff=59% EfcLed=156lm/W EfcLum=92lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	75 98 100 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 2 / 0.8 / BZ 1		

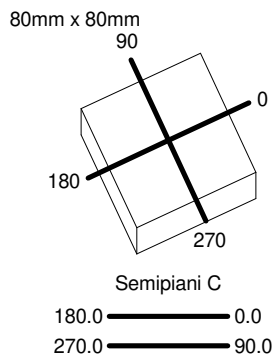

ULOR 0.04 %  
DLOR 99.96 %  
RN 0.04 %

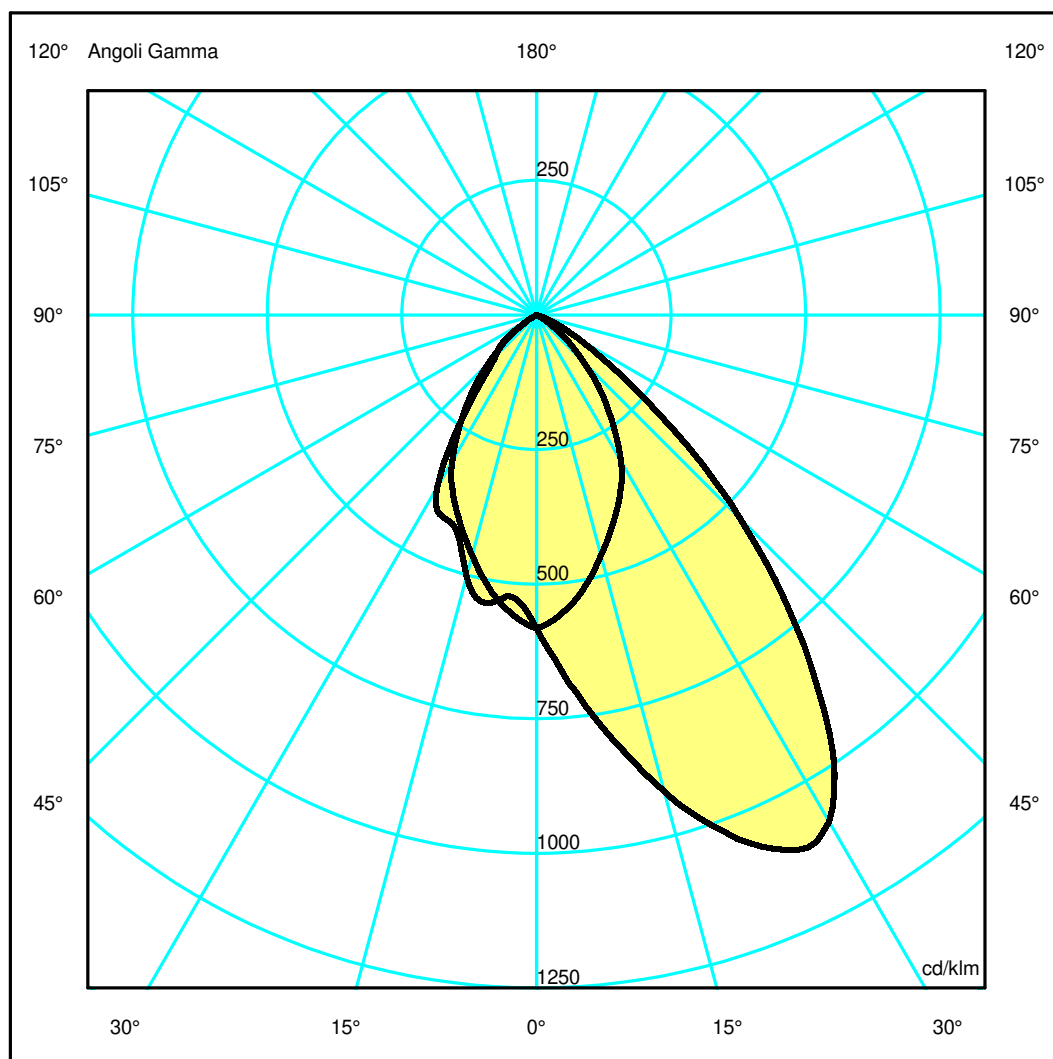

## Luminaire

Code M274605\_30°  
Name EVERY 80 SQ TS OR LED3000K 2X22° M\_30°

## Measurment.

Code FTS2400185.  
Name EVERY 80 SQ TS OR LED3000K 2X22° M\_30°

Luminaire Flux	919 lm	Luminaire Power	10.0 W	Efficacy	91.900 lm/W	Efficiency	100.00%
Source Flux	919 lm	Maximum value	1110.11 cd/klm	Position	C=0.00 G=27.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	80 mm	Width	80 mm	Height	115 mm
Rectangular Luminous Area		Length	60 mm	Width	60 mm	Height	0 mm
Horizontal Luminous Area		0.003600 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000871 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		20-05-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		919 lm	


LED Flux=1556lm LED Power=10W Eff=59% EfcLed=156lm/W EfcLum=92lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h

C.I.E.	75 98 100 100 100	D DIN 5040	A60
F UTE	1.00 B	B NBN	BZ 2 / 0.8 / BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.47	0.95	1.42	1.90	2.37	OC	0.50	1.00	1.50	2.00	2.50
OB	0.54	1.08	1.61	2.15	2.69	OD	0.50	1.00	1.50	2.00	2.50

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	534.94	630.47	841.07	1007.45	872.84	493.31	166.82	43.89	4.65	0.39
OB	534.94	482.34	461.48	379.91	233.11	98.92	40.89	0.00	0.00	0.00
OC	534.94	510.18	424.94	337.26	227.45	114.31	33.41	1.51	0.40	0.32
OD	534.94	510.18	424.94	337.26	227.45	114.31	33.41	1.51	0.40	0.32

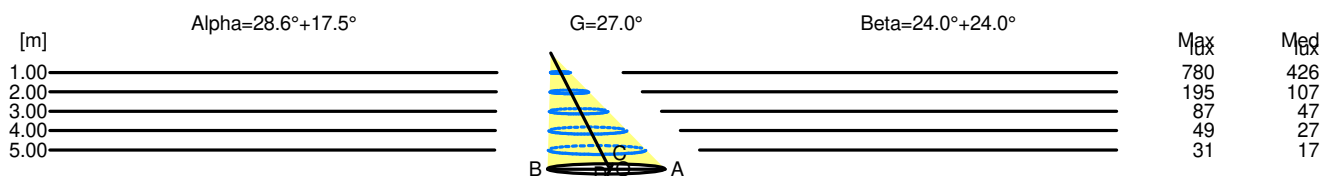

H[m]	D[m]	Max lux	Med lux	Alpha=28.6°+17.5°	G=27.0
1.00	1.01	780	426		
2.00	2.02	195	107		
3.00	3.04	87	47		
4.00	4.05	49	27		
5.00	5.06	31	17		

H[m]	D[m]	Max lux	Med lux	Beta=24.0°+24.0°	G=0.0
1.00	1.00	780	426		
2.00	2.00	195	107		
3.00	3.00	87	47		
4.00	4.00	49	27		
5.00	5.00	31	17		