

## Luminaire

Code M3103W91  
Name Eggboard matrix 800x800 diretta + indiretta 3000K grigio

## Measurement

Code FTS1601252-F  
Name Eggboard matrix 800x800 diretta + indiretta 3000K grigio


Luminaire Flux	4705 lm	Luminaire Power	46.0 W	Efficacy	102.283 lm/W	Efficiency	100.00%
Source Flux	4705 lm	Maximum value	360.82 cd/klm	Position	C=50.00 G=20.00	CG	Double Symmetrical
Rectangular Luminaire		Length	800 mm	Width	800 mm	Height	56 mm
Rectangular Luminous Area		Length	120 mm	Width	120 mm	Height	0 mm
Horizontal Luminous Area		0.014400 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.003484 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		04-03-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4705 lm	

LED Flux=6321lm LED Power=36W Eff=74% EfcLed=174lm/W EfcLum=102lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6k)=50000h


C.I.E. 95 100 100 32 100  
F UTE 0.32 A + 0.68 T

D DIN 5040  
B NBN

D62  
BZ 1

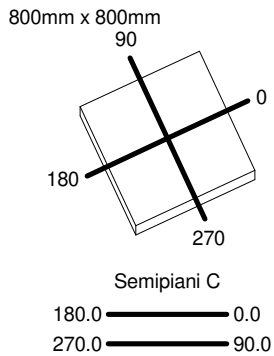

ULOR 68.30 %  
DLOR 31.70 %  
RN 68.30 %

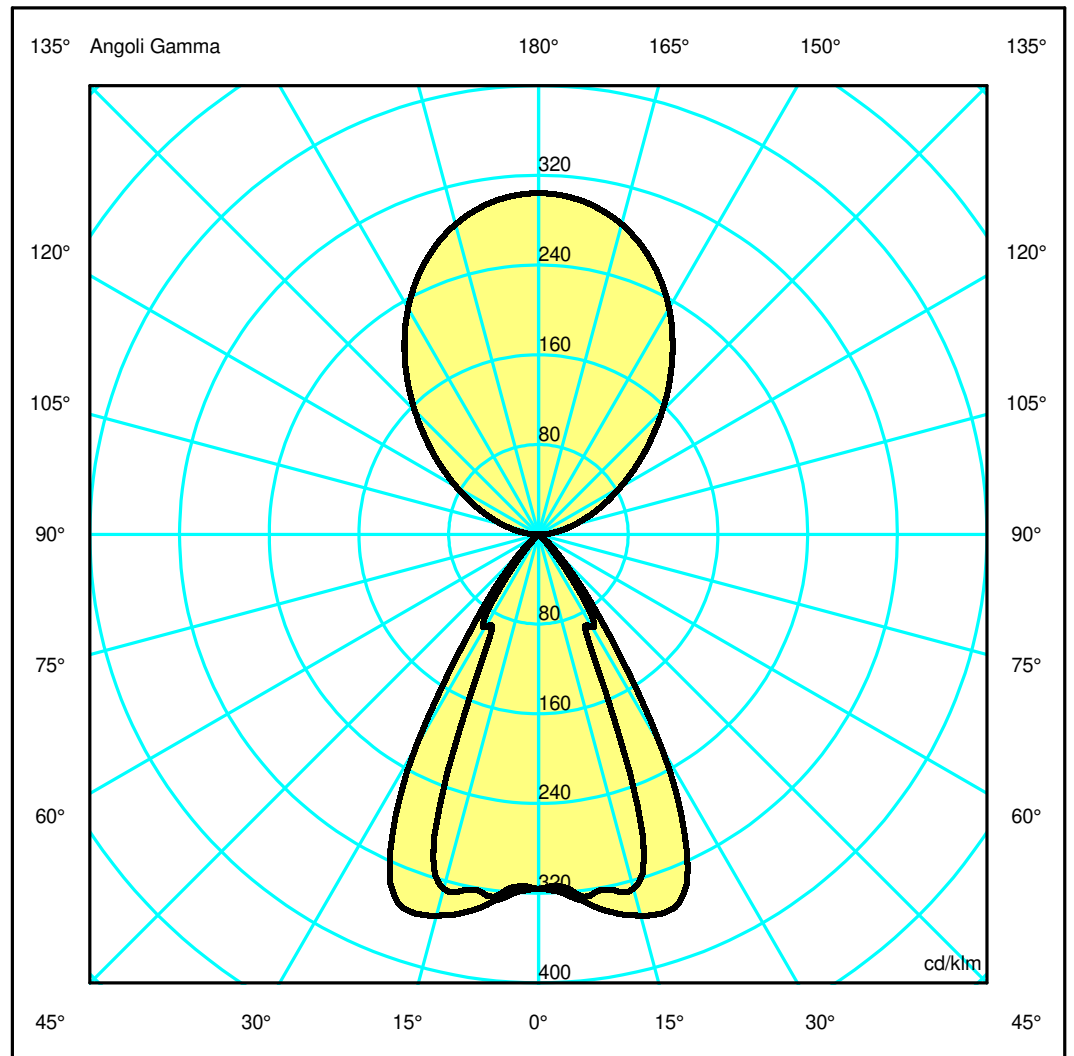

## Luminaire

Code M3103W91  
Name Eggboard matrix 800x800 diretta + indiretta 3000K grigio

## Measurerm.


Code FTS1601252-F  
Name Eggboard matrix 800x800 diretta + indiretta 3000K grigio

Luminaire Flux	4705 lm	Luminaire Power	46.0 W	Efficacy	102.283 lm/W	Efficiency	100.00%
Source Flux	4705 lm	Maximum value	360.82 cd/klm	Position	C=50.00 G=20.00	CG	Double Symmetrical
Rectangular Luminaire		Length	800 mm	Width	800 mm	Height	56 mm
Rectangular Luminous Area		Length	120 mm	Width	120 mm	Height	0 mm
Horizontal Luminous Area		0.014400 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003484 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		04-03-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		4705 lm	
LED Flux=6321lm LED Power=36W Eff=74% EfcLed=174lm/W EfcLum=102lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6k)=50000h							
C.I.E.	95 100 100 32 100			D DIN 5040		D62	
F UTE	0.32 A + 0.68 T			B NBN		BZ 1	

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.42	0.84	1.25	1.67	2.09	OC	0.63	1.26	1.89	2.53	3.16
OB	0.42	0.84	1.25	1.67	2.09	OD	0.63	1.26	1.89	2.53	3.16

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1487.34	1493.43	1539.68	501.06	324.13	26.78	4.95	1.51	0.80	0.39
OB	1487.34	1493.43	1539.68	501.06	324.13	26.78	4.95	1.51	0.80	0.39
OC	1487.34	1524.19	1655.91	1473.27	520.80	108.04	13.28	2.31	0.78	0.35
OD	1487.34	1524.19	1655.91	1473.27	520.80	108.04	13.28	2.31	0.78	0.35

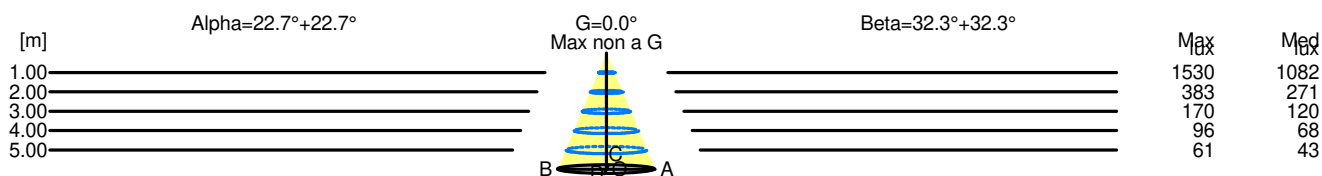

H[m]	D[m]	Max lux	Med lux	Alpha=22.7°+22.7°	G=0.0° Max non a G
1.00	0.84	1530	1082		
2.00	1.67	383	271		
3.00	2.51	170	120		
4.00	3.34	96	68		
5.00	4.18	61	43		

H[m]	D[m]	Max lux	Med lux	Beta=32.3°+32.3°	G=0.0° Max non a G
1.00	1.26	1530	1082		
2.00	2.53	383	271		
3.00	3.79	170	120		
4.00	5.05	96	68		
5.00	6.32	61	43		