


Luminaire

Code M325065_30°
Name EVERY 150 CA TR OR LED 2700 2X16°ME/SI_30°

Measurement

Code FTS2400303.
Name EVERY 150 CA TR OR LED 2700 2X16°ME/SI_30°

Luminaire Flux	1960 lm	Luminaire Power	20.0 W	Efficacy	98.000 lm/W	Efficiency	100.00%
Source Flux	1960 lm	Maximum value	890.97 cd/klm	Position	C=5.00 G=20.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	136 mm	Width	136 mm	Height	138 mm
Rectangular Luminous Area		Length	121 mm	Width	121 mm	Height	0 mm
Horizontal Luminous Area		0.014641 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003542 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		06-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1960 lm	
LED Flux=2979lm LED Power=20W Eff=66% EfcLed=149lm/W EfcLum=98lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	80 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

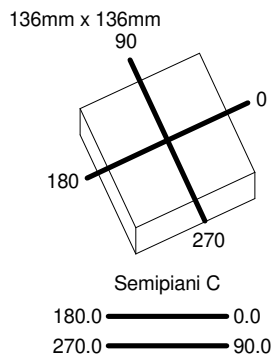

ULOR 0.05 %
DLOR 99.95 %
RN 0.05 %

