

Luminaire

Code M328125_0°
Name EVERY 105 RD TR OR LED 2700K 2X9°NO/BL_0°

Measurement

Code FTS2400260.
Name EVERY 105 RD TR OR LED 2700K 2X9°NO/BL_0°

Luminaire Flux	793 lm	Luminaire Power	10.0 W	Efficacy	79.300 lm/W	Efficiency	100.00%
Source Flux	793 lm	Maximum value	3806.56 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	85 mm	Height	130 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001216 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		793 lm	
LED Flux=1474lm LED Power=10W Eff=54% EfcLed=147lm/W EfcLum=79lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

Diam=85mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR 100.00 %

RN 0.00 %

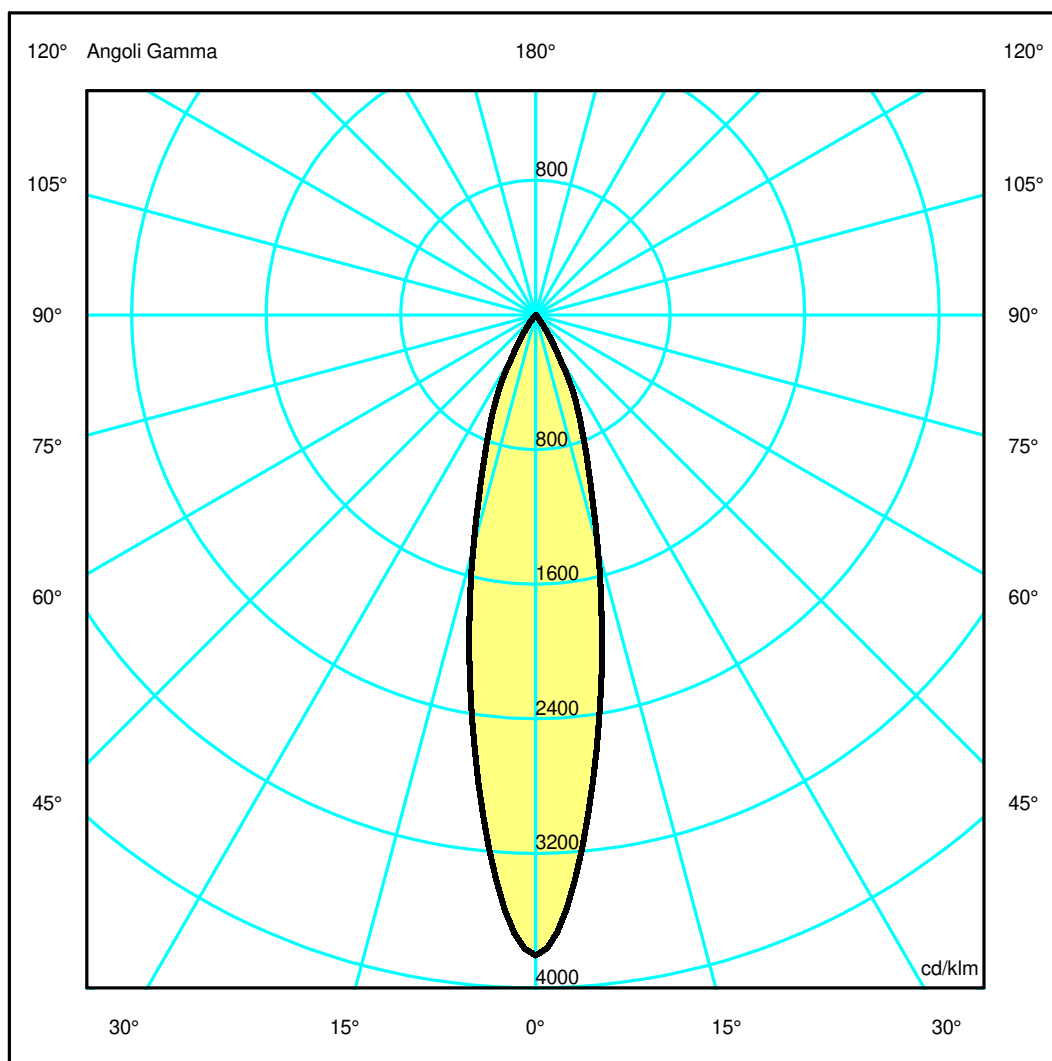

Luminaire

Code M328125_0°
Name EVERY 105 RD TR OR LED 2700K 2X9°NO/BL_0°

Measurem.

Code FTS2400260.
Name EVERY 105 RD TR OR LED 2700K 2X9°NO/BL_0°

Luminaire Flux	793 lm	Luminaire Power	10.0 W	Efficacy	79.300 lm/W	Efficiency	100.00%
Source Flux	793 lm	Maximum value	3806.56 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	85 mm	Height	130 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001216 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		793 lm	


LED Flux=1474lm LED Power=10W Eff=54% EfcLed=147lm/W EfcLum=79lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h

C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.21	0.42	0.64	0.85	1.06	OC	0.21	0.42	0.64	0.85	1.06
OB	0.21	0.42	0.64	0.85	1.06	OD	0.21	0.42	0.64	0.85	1.06

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3018.60	2520.69	1132.75	444.75	73.70	11.05	0.89	0.39	0.24	0.19
OB	3018.60	2520.69	1132.75	444.75	73.70	11.05	0.89	0.39	0.24	0.19
OC	3018.60	2520.69	1132.75	444.75	73.70	11.05	0.89	0.39	0.24	0.19
OD	3018.60	2520.69	1132.75	444.75	73.70	11.05	0.89	0.39	0.24	0.19

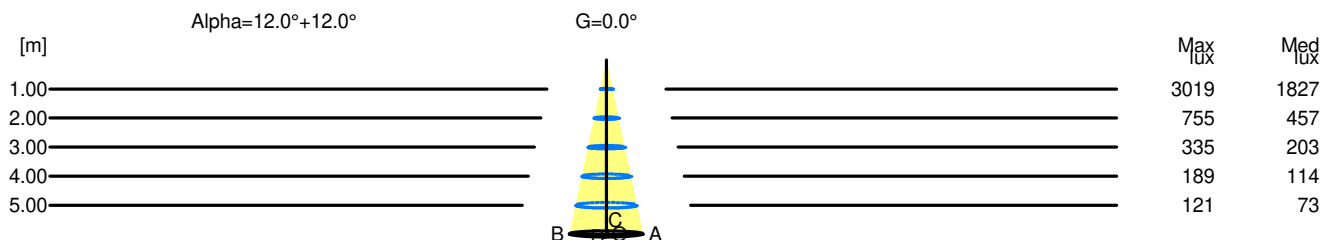

H[m]	D[m]	Max lux	Med lux	Alpha=12.0°+12.0°	G=0.0
1.00	0.42	3019	1827		
2.00	0.85	755	457		
3.00	1.27	335	203		
4.00	1.70	189	114		
5.00	2.12	121	73		