

## Luminaire

Code M328425\_30°  
Name EVERY 105 RD TR OR LED 2700K 2X9°ME/BL\_30°

## Measurement

Code FTS2400249.  
Name EVERY 105 RD TR OR LED 2700K 2X9°ME/BL\_30°


Luminaire Flux	1120 lm	Luminaire Power	10.0 W	Efficacy	112.000 lm/W	Efficiency	100.00%
Source Flux	1120 lm	Maximum value	3333.29 cd/klm	Position	C=0.00 G=29.00	CG Sym. on planes 0-180	
Round Luminaire		Diam.	85 mm	Height	130 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°	0.001216 m2		
Coordinate system		CG		Symmetry Type	Sym. on planes 0-180		
Date		06-06-2024		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	1120 lm		

LED Flux=1474lm LED Power=10W Eff=76% EfcLed=147lm/W EfcLum=112lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h

C.I.E. 94 100 100 100 100  
F UTE 1.00 A

D DIN 5040  
B NBN

A60  
BZ 1

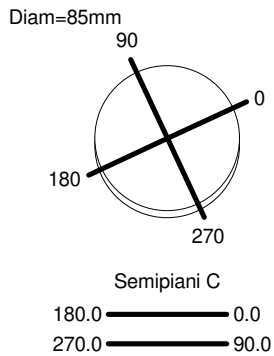

ULOR 0.02 %  
DLOR 99.98 %  
RN 0.02 %

