

## Luminaire

Code M331120  
Name EVERY 80 RD FI LED 2700K 2X9° M/B

## Measurum.

Code FTS1602656-A  
Name EVERY 80 RD FI LED 2700K 2X9° M/B

Luminaire Flux	1138 lm	Luminaire Power	10.0 W	Efficacy	113.800 lm/W	Efficiency	100.00%
Source Flux	1138 lm	Maximum value	4958.52 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	60 mm	Height	0 mm		
Horizontal Luminous Area		0.002827 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000684 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-05-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1138 lm	
LED Flux=1474lm LED Power=10W Eff=77% EfcLed=147lm/W EfcLum=114lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	98 100 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Diam=80mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

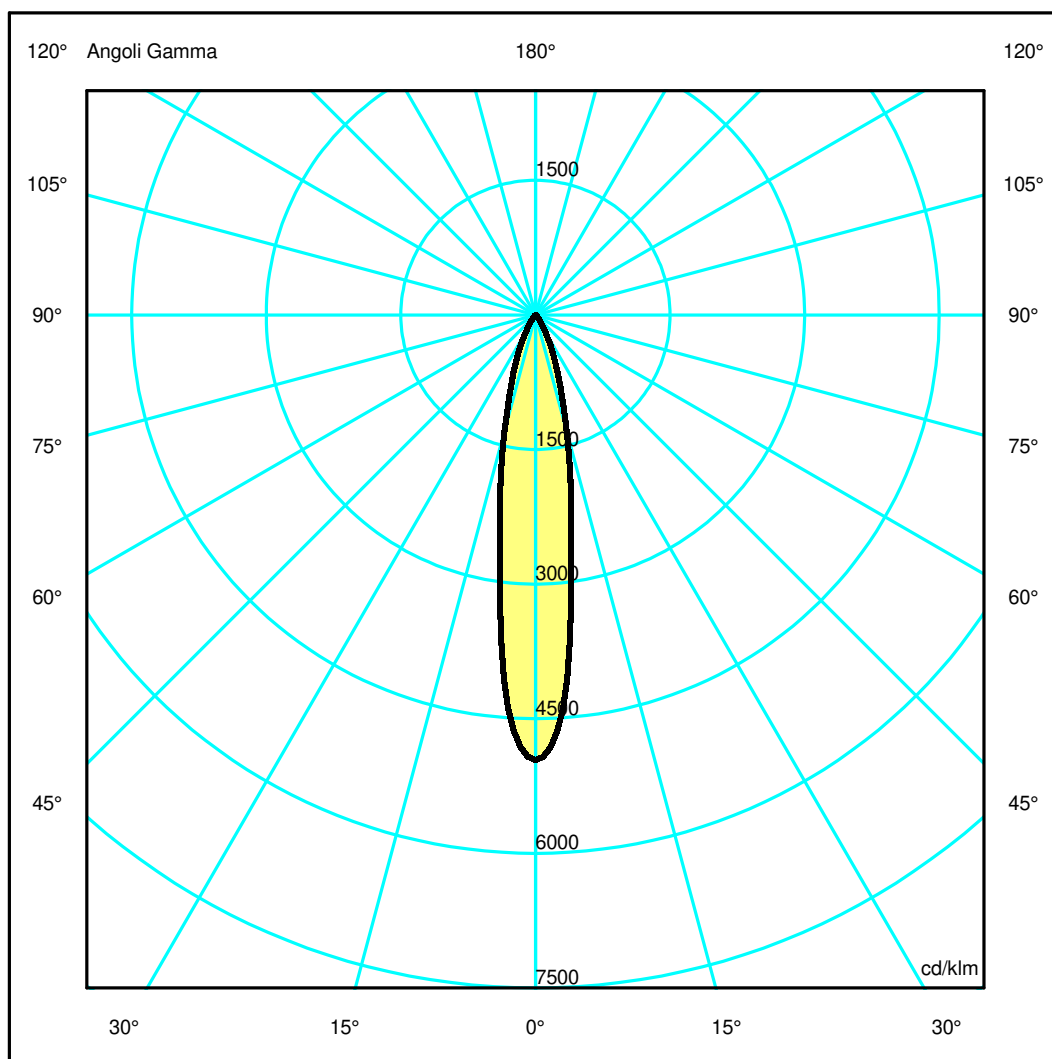

## Luminaire

Code M331120  
Name EVERY 80 RD FI LED 2700K 2X9° M/B

## Measurerm.

Code FTS1602656-A  
Name EVERY 80 RD FI LED 2700K 2X9° M/B

Luminaire Flux	1138 lm	Luminaire Power	10.0 W	Efficacy	113.800 lm/W	Efficiency	100.00%
Source Flux	1138 lm	Maximum value	4958.52 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	60 mm	Height	0 mm		
Horizontal Luminous Area		0.002827 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.000684 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-05-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1138 lm	

LED Flux=1474lm LED Power=10W Eff=77% EfcLed=147lm/W EfcLum=114lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h

C.I.E. 98 100 100 100 100  
F UTE --


D DIN 5040  
B NBN

A60  
BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.16	0.33	0.49	0.65	0.81	OC	0.16	0.33	0.49	0.65	0.81
OB	0.16	0.33	0.49	0.65	0.81	OD	0.16	0.33	0.49	0.65	0.81

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	5642.80	4623.17	1520.60	501.24	122.93	34.56	7.76	0.33	0.26	0.23
OB	5642.80	4623.17	1520.60	501.24	122.93	34.56	7.76	0.33	0.26	0.23
OC	5642.80	4623.17	1520.60	501.24	122.93	34.56	7.76	0.33	0.26	0.23
OD	5642.80	4623.17	1520.60	501.24	122.93	34.56	7.76	0.33	0.26	0.23

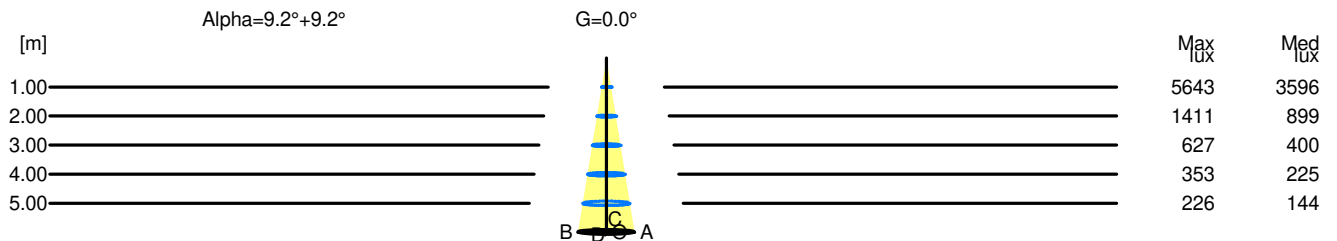

H[m]	D[m]	Max lux	Med lux	Alpha=9.2°+9.2°	G=0.0
1.00	0.33	5643	3596		
2.00	0.65	1411	899		
3.00	0.98	627	400		
4.00	1.30	353	225		
5.00	1.63	226	144		