


## Luminaire

Code M331315\_30°  
Name EVERY 80 RD OR LED 2700K 2X22° M/N\_30°

## Measurement

Code FTS2400121.  
Name EVERY 80 RD OR LED 2700K 2X22° M/N\_30°

Luminaire Flux	870 lm	Luminaire Power	10.0 W	Efficacy	87.000 lm/W	Efficiency	100.00%
Source Flux	870 lm	Maximum value	1147.12 cd/klm	Position	C=0.00 G=26.00	CG	Sym. on planes 0-180
Round Luminaire		Diam.	80 mm	Height	115 mm		
Round Luminous Area		Diam.	60 mm	Height	0 mm		
Horizontal Luminous Area			0.002827 m <sup>2</sup>	Emitting area on Plane 180°			0.000000 m <sup>2</sup>
Emitting area on Plane 0°			0.000000 m <sup>2</sup>	Emitting area on Plane 270°			0.000000 m <sup>2</sup>
Emitting area on Plane 90°			0.000000 m <sup>2</sup>	Glare area at 76°			0.000684 m <sup>2</sup>
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		20-05-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		870 lm	
LED Flux=1474lm LED Power=10W Eff=59% EfcLed=147lm/W EfcLum=87lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	79 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

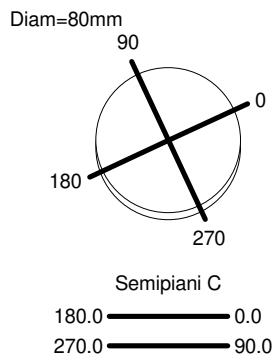

ULOR 0.06 %  
DLOR 99.94 %  
RN 0.06 %

