

Luminaire

Code NL1732310K0
Name LineaLed Wallwasher 100 - SPOT - 3000K

Measurerm.

Code FTS1601663-A
Name LineaLed Wallwasher 100 - SPOT - 3000K

Luminaire Flux	3152 lm	Luminaire Power	34.0 W	Efficacy	92.706 lm/W	Efficiency	100.00%
Source Flux	3152 lm	Maximum value	6074.25 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	978 mm	Width	43 mm	Height	62 mm
Rectangular Luminous Area		Length	958 mm	Width	23 mm	Height	0 mm
Horizontal Luminous Area		0.022034 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005331 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3152 lm	

LED Flux=3576lm LED Power=34W Eff=88% EfcLed=105lm/W EfcLum=93lm/W CCT=3000K Ra=80 SDCM=3 L70(9k)=51400h

C.I.E. 0 0 0 0 100
F UTE 1.00 T

D DIN 5040 --
B NBN BZ 10

978mm x 43mm




Semipiani C

180.0 ——— 0.0

ULOR100.00 %

DLOR 0.00 %

RN100.00 %

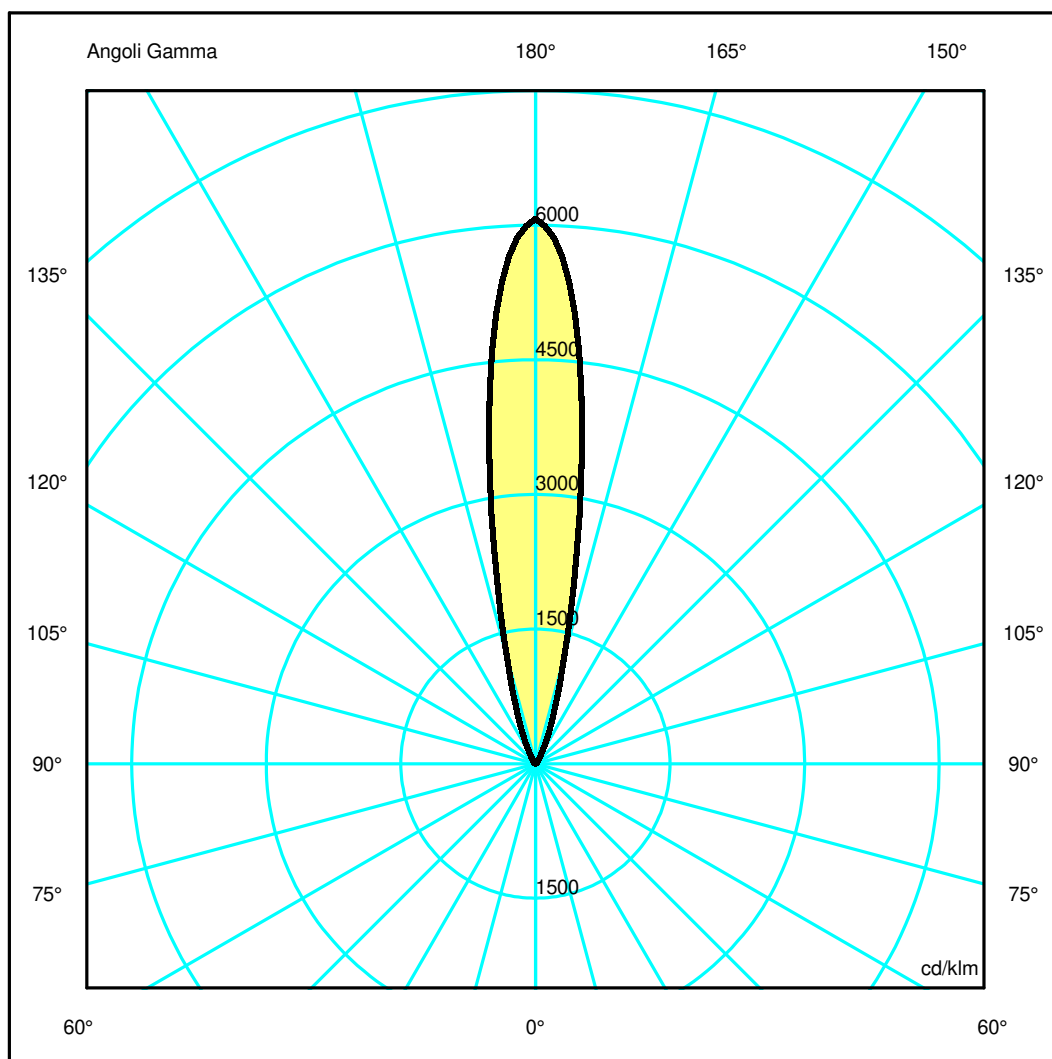

Luminaire

Code NL1732310K0
Name LineaLed Wallwasher 100 - SPOT - 3000K

Measurerm.

Code FTS1601663-A
Name LineaLed Wallwasher 100 - SPOT - 3000K

Luminaire Flux	3152 lm	Luminaire Power	34.0 W	Efficacy	92.706 lm/W	Efficiency	100.00%
Source Flux	3152 lm	Maximum value	6074.25 cd/klm	Position	C=0.00 G=180.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	978 mm	Width	43 mm	Height	62 mm
Rectangular Luminous Area		Length	958 mm	Width	23 mm	Height	0 mm
Horizontal Luminous Area		0.022034 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.005331 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3152 lm	


LED Flux=3576lm LED Power=34W Eff=88% EfcLed=105lm/W EfcLum=93lm/W CCT=3000K Ra=80 SDCM=3 L70(9k)=51400h

C.I.E.	0 0 0 0 100	D DIN 5040	--
F UTE	1.00 T	B NBN	BZ 10

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.17	0.34	0.50	0.67	0.84	OC	0.17	0.34	0.50	0.67	0.84
OB	0.17	0.34	0.50	0.67	0.84	OD	0.17	0.34	0.50	0.67	0.84

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	19146.05	15864.32	3927.34	878.21	205.70	87.38	50.89	28.60	12.89	3.03
OB	19146.05	15864.32	3927.34	878.21	205.70	87.38	50.89	28.60	12.89	3.03
OC	19146.05	15864.32	3927.34	878.21	205.70	87.38	50.89	28.60	12.89	3.03
OD	19146.05	15864.32	3927.34	878.21	205.70	87.38	50.89	28.60	12.89	3.03

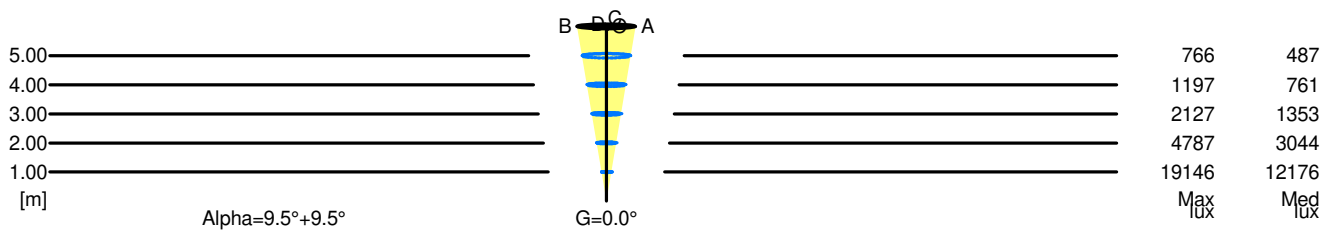

5.00	1.68	766	487		
4.00	1.34	1197	761		
3.00	1.01	2127	1353		
2.00	0.67	4787	3044		
1.00	0.34	19146	12176		
H[m]	D[m]	Max lux	Med lux	Alpha=9.5°+9.5°	G=0.0