

## Luminaire

Code NL1906340Y004  
 Name Parabola 80 Round 40° finitura nera 2700K

## Measurem.

Code FTS1601781  
 Name Parabola 80 Round 40° finitura nera 2700K


Luminaire Flux	975.28 lm	Luminaire Power	12.00 W	Efficacy	81.27 lm/W	Efficiency	100.00%
Lamps Flux	975.28 lm	Maximum value	1594.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam.	75 mm	Height	90 mm		
		Diam.	55 mm	Height	0 mm		
Horizontal Luminous Area	0.002376 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.000575 m2	
Coordinate system	CG			Symmetry Type		Rotosymmetrical	
Date	21-01-2015			Maximum Gamma Angle		90	
Measurement Distance	0.00			Measurement Flux		975.28 lm	

LED Flux=1447lm LED Power=12W Eff=67,4% EfcLed=121lm/W EfcLum=81lm/W Ra=90 SDCM=3 L70(6K)=60000h

C.I.E. 94 99 100 100 100  
 F UTE 1.00 A

D DIN 5040 A60  
 B NBN BZ 1


Diam=75mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

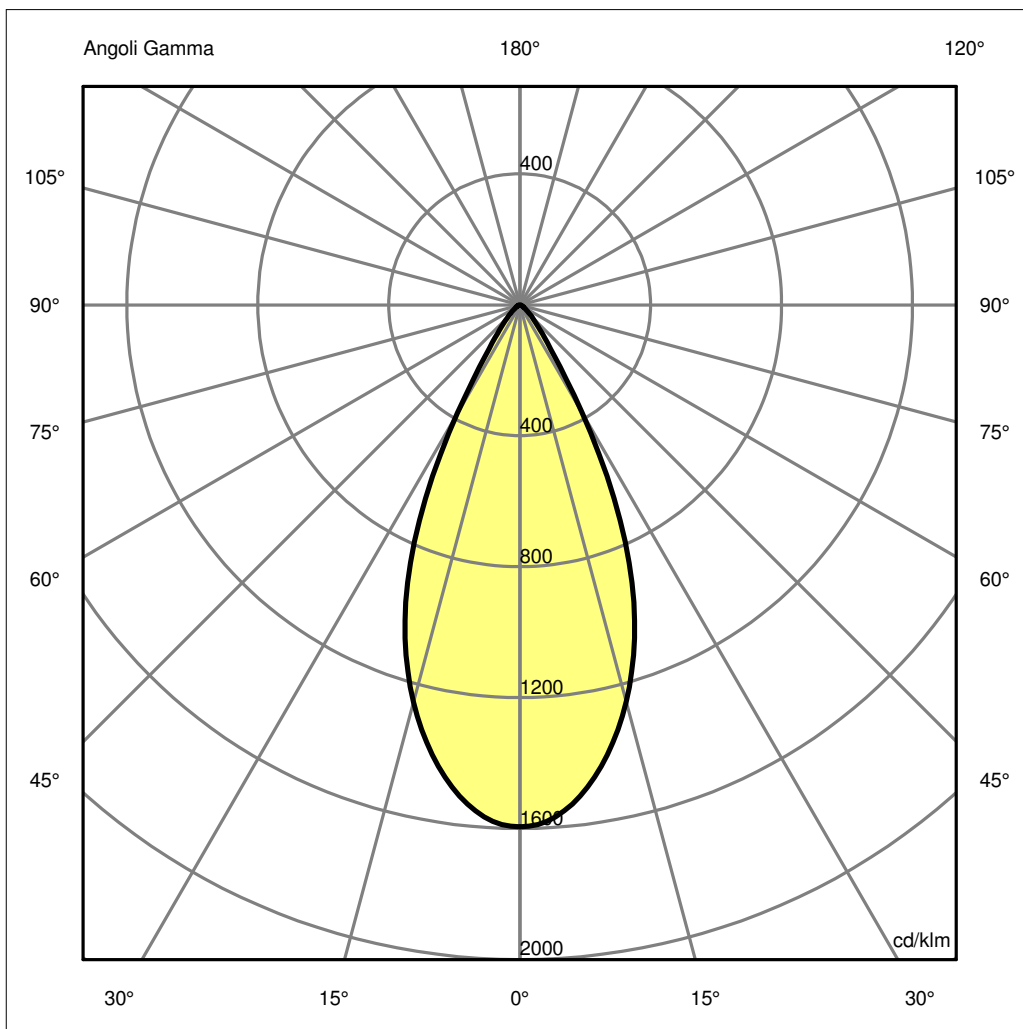

## Luminaire

Code NL1906340Y004  
Name Parabola 80 Round 40° finitura nera 2700K

## Measurerm.


Code FTS1601781  
Name Parabola 80 Round 40° finitura nera 2700K

Luminaire Flux	975.28 lm	Luminaire Power	12.00 W	Efficacy	81.27 lm/W	Efficiency	100.00%
Lamps Flux	975.28 lm	Maximum value	1594.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam.	75 mm	Height	90 mm		
		Diam.	55 mm	Height	0 mm		
Horizontal Luminous Area	0.002376 m2	Emitting area on Plane 180°				0.000000 m2	
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°				0.000000 m2	
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°				0.000575 m2	
Coordinate system	CG	Symmetry Type				Rotosymmetrical	
Date	21-01-2015	Maximum Gamma Angle				90	
Measurement Distance	0.00	Measurement Flux				975.28 lm	
LED Flux=1447lm LED Power=12W Eff=67,4% EfcLed=121lm/W EfcLum=81lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	94 99 100 100 100	D DIN 5040				A60	
F UTE	1.00 A	B NBN				BZ 1	

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.44	0.89	1.33	1.77	2.22	OC	0.44	0.89	1.33	1.77	2.22
OB	0.44	0.89	1.33	1.77	2.22	OD	0.44	0.89	1.33	1.77	2.22

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1555.04	1513.22	1223.92	708.13	161.01	49.78	18.75	8.23	3.41	0.00
OB	1555.04	1513.22	1223.92	708.13	161.01	49.78	18.75	8.23	3.41	0.00
OC	1555.04	1513.22	1223.92	708.13	161.01	49.78	18.75	8.23	3.41	0.00
OD	1555.04	1513.22	1223.92	708.13	161.01	49.78	18.75	8.23	3.41	0.00

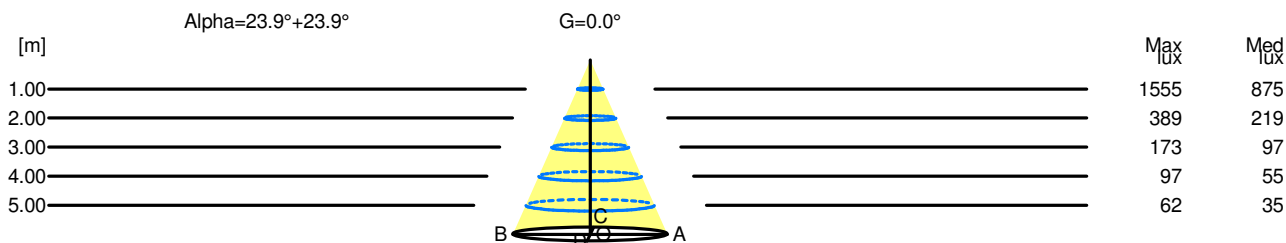

H[m]	D[m]	Max lux	Med lux	Alpha=23.9°+23.9°	G=0.0
1.00	0.89	1555	875		
2.00	1.77	389	219		
3.00	2.66	173	97		
4.00	3.55	97	55		
5.00	4.44	62	35		

**Luminaire**

Code NL1906340Y004  
 Name Parabola 80 Round 40° finitura nera 2700K

**Measurerm.**

Code FTS1601781  
 Name Parabola 80 Round 40° finitura nera 2700K

Luminaire Flux	975.28 lm	Luminaire Power	12.00 W	Efficacy	81.27 lm/W	Efficiency	100.00%
Lamps Flux	975.28 lm	Maximum value	1594.45 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

**UGR**  
 S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	18.0	18.7	18.2	18.9	19.0	18.0	18.7	18.2	18.9	19.0
x=2H y=3H	18.1	18.7	18.4	19.0	19.2	18.1	18.7	18.4	19.0	19.2
x=2H y=4H	18.1	18.7	18.4	19.0	19.2	18.1	18.7	18.4	19.0	19.2
x=2H y=6H	18.1	18.7	18.4	18.9	19.2	18.1	18.7	18.4	18.9	19.2
x=2H y=8H	18.1	18.6	18.4	18.9	19.2	18.1	18.6	18.4	18.9	19.2
x=2H y=12H	18.0	18.5	18.4	18.8	19.2	18.0	18.5	18.4	18.8	19.2
x=4H y=2H	17.9	18.5	18.2	18.8	19.0	17.9	18.5	18.2	18.8	19.0
x=4H y=3H	18.2	18.7	18.5	19.0	19.3	18.2	18.7	18.5	19.0	19.3
x=4H y=4H	18.3	18.7	18.6	19.0	19.4	18.3	18.7	18.6	19.0	19.4
x=4H y=6H	18.2	18.6	18.6	19.0	19.3	18.2	18.6	18.6	19.0	19.3
x=4H y=8H	18.2	18.5	18.6	18.9	19.3	18.2	18.5	18.6	18.9	19.3
x=4H y=12H	18.2	18.4	18.6	18.8	19.3	18.2	18.4	18.6	18.8	19.3
x=8H y=4H	18.2	18.6	18.7	18.9	19.3	18.2	18.6	18.7	18.9	19.3
x=8H y=6H	18.2	18.5	18.7	18.9	19.3	18.2	18.5	18.7	18.9	19.3
x=8H y=8H	18.2	18.4	18.6	18.8	19.3	18.2	18.4	18.6	18.8	19.3
x=8H y=12H	18.1	18.3	18.6	18.8	19.3	18.1	18.3	18.6	18.8	19.3
x=12H y=4H	18.2	18.5	18.6	18.9	19.3	18.2	18.5	18.6	18.9	19.3
x=12H y=6H	18.2	18.4	18.6	18.8	19.3	18.2	18.4	18.6	18.8	19.3
x=12H y=8H	18.1	18.3	18.6	18.8	19.3	18.1	18.3	18.6	18.8	19.3