


Luminaire

Code NL1907240K004
Name Parabola 100 Round 40° finitura nera 3000K

Measurem.

Code FTS1601861
Name Parabola 100 Round 40° finitura nera 3000K

Luminaire Flux	1350.13 lm	Luminaire Power	17.00 W	Efficacy	79.42 lm/W	Efficiency	100.00%
Lamps Flux	1350.13 lm	Maximum value	1373.87 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 100 mm Diam. 75 mm	Height	100 mm	Height	100 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.004418 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.000000 m2 0.000000 m2 0.001069 m2		
Coordinate system Date Measurement Distance	CG 12-12-2014 0.00	Symmetry Type Maximum Gamma Angle Measurement Flux			Rotosymmetrical 90 1350.13 lm		
LED Flux=2103lm LED Power=17W Eff=64,2% EfcLed=124lm/W EfcLum=79lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E. F UTE	86 97 100 100 100 1.00 A	D DIN 5040 B NBN			A60 BZ 1		

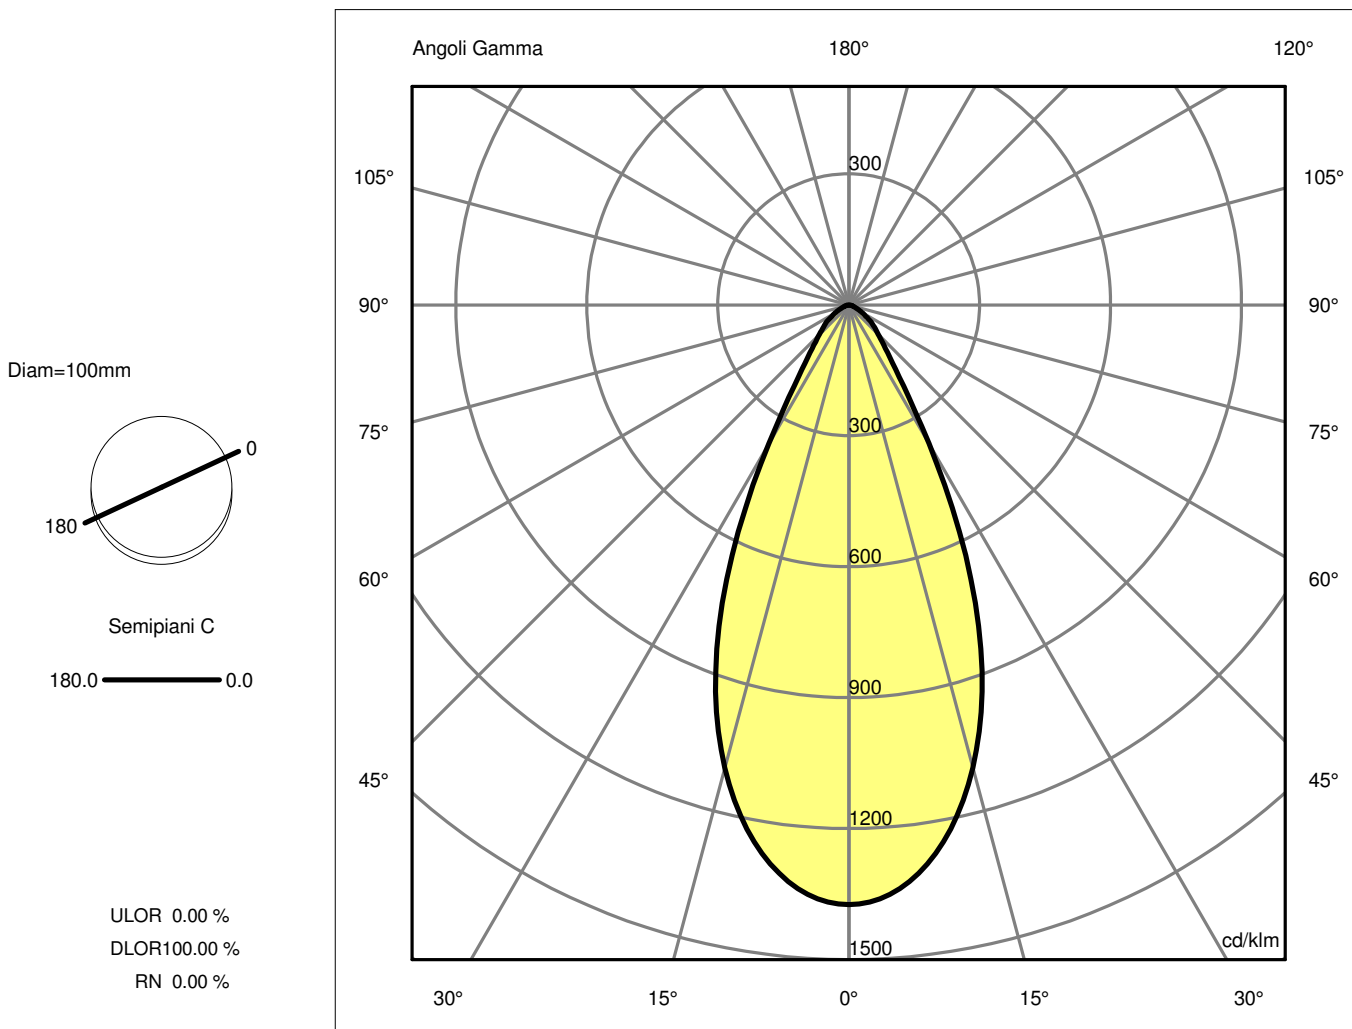

Luminaire

Code NL1907240K004
Name Parabola 100 Round 40° finitura nera 3000K

Measurement


Code FTS1601861
Name Parabola 100 Round 40° finitura nera 3000K

Luminaire Flux	1350.13 lm	Luminaire Power	17.00 W	Efficacy	79.42 lm/W	Efficiency	100.00%
Lamps Flux	1350.13 lm	Maximum value	1373.87 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area		Diam. Diam.	100 mm 75 mm	Height Height	100 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°		0.004418 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°		0.000000 m2 0.000000 m2 0.001069 m2	
Coordinate system Date Measurement Distance		CG 12-12-2014 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux		Rotosymmetrical 90 1350.13 lm	
LED Flux=2103lm LED Power=17W Eff=64,2% EfcLed=124lm/W EfcLum=79lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E. F UTE	86 97 100 100 100 1.00 A			D DIN 5040 B NBN	A60 BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.45	0.89	1.34	1.78	2.23	OC	0.45	0.89	1.34	1.78	2.23
OB	0.45	0.89	1.34	1.78	2.23	OD	0.45	0.89	1.34	1.78	2.23

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1854.90	1811.91	1482.17	855.17	272.27	128.47	68.83	29.61	11.46	0.00
OB	1854.90	1811.91	1482.17	855.17	272.27	128.47	68.83	29.61	11.46	0.00
OC	1854.90	1811.91	1482.17	855.17	272.27	128.47	68.83	29.61	11.46	0.00
OD	1854.90	1811.91	1482.17	855.17	272.27	128.47	68.83	29.61	11.46	0.00

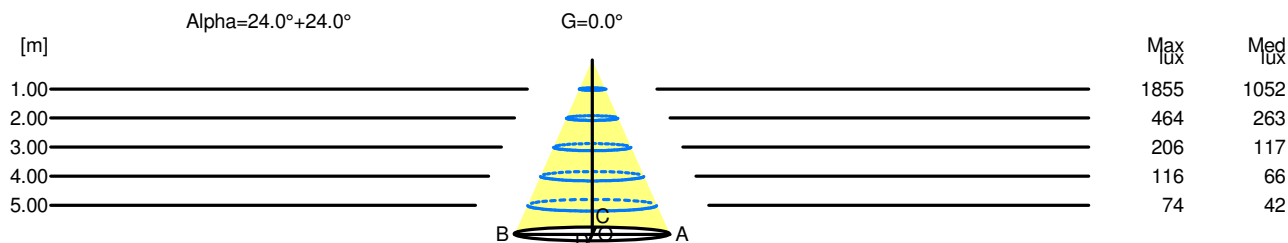

H[m]	D[m]	Max lux	Med lux	Alpha=24.0°+24.0°	G=0.0
1.00	0.89	1855	1052		
2.00	1.78	464	263		
3.00	2.67	206	117		
4.00	3.57	116	66		
5.00	4.46	74	42		

Luminaire

Code NL1907240K004
 Name Parabola 100 Round 40° finitura nera 3000K

Measurement

Code FTS1601861
 Name Parabola 100 Round 40° finitura nera 3000K

Luminaire Flux	1350.13 lm	Luminaire Power	17.00 W	Efficacy	79.42 lm/W	Efficiency	100.00%
Lamps Flux	1350.13 lm	Maximum value	1373.87 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

UGR
 S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	20.7	21.5	20.9	21.7	21.9	20.7	21.5	20.9	21.7	21.9
x=2H y=3H	21.1	21.8	21.3	22.0	22.3	21.1	21.8	21.3	22.0	22.3
x=2H y=4H	21.2	21.8	21.5	22.1	22.4	21.2	21.8	21.5	22.1	22.4
x=2H y=6H	21.2	21.8	21.5	22.1	22.4	21.2	21.8	21.5	22.1	22.4
x=2H y=8H	21.2	21.8	21.5	22.1	22.4	21.2	21.8	21.5	22.1	22.4
x=2H y=12H	21.1	21.7	21.5	22.0	22.3	21.1	21.7	21.5	22.0	22.3
x=4H y=2H	20.9	21.6	21.2	21.8	22.1	20.9	21.6	21.2	21.8	22.1
x=4H y=3H	21.4	21.9	21.7	22.3	22.6	21.4	21.9	21.7	22.3	22.6
x=4H y=4H	21.5	22.0	21.9	22.4	22.7	21.5	22.0	21.9	22.4	22.7
x=4H y=6H	21.6	22.0	22.0	22.4	22.8	21.6	22.0	22.0	22.4	22.8
x=4H y=8H	21.6	22.0	22.0	22.4	22.8	21.6	22.0	22.0	22.4	22.8
x=4H y=12H	21.6	21.9	22.0	22.3	22.7	21.6	21.9	22.0	22.3	22.7
x=8H y=4H	21.6	22.0	22.0	22.3	22.7	21.6	22.0	22.0	22.3	22.7
x=8H y=6H	21.7	22.0	22.1	22.4	22.8	21.7	22.0	22.1	22.4	22.8
x=8H y=8H	21.7	21.9	22.1	22.3	22.8	21.7	21.9	22.1	22.3	22.8
x=8H y=12H	21.6	21.8	22.1	22.3	22.8	21.6	21.8	22.1	22.3	22.8
x=12H y=4H	21.6	21.9	22.0	22.3	22.7	21.6	21.9	22.0	22.3	22.7
x=12H y=6H	21.7	21.9	22.1	22.3	22.8	21.7	21.9	22.1	22.3	22.8
x=12H y=8H	21.6	21.8	22.1	22.3	22.8	21.6	21.8	22.1	22.3	22.8