

## Luminaire

Code NL4203110Y006  
 Name Everything 35 square 14° - cornice bianca- 2700K

## Measurerm.

Code FTS1602924-A  
 Name Everything 35 square 14° - cornice bianca- 2700K

|                            |        |                 |                |                             |               |                 |                 |
|----------------------------|--------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux             | 140 lm | Luminaire Power | 1.4 W          | Efficacy                    | 100.000 lm/W  | Efficiency      | 100.00%         |
| Source Flux                | 140 lm | Maximum value   | 5990.22 cd/klm | Position                    | C=0.00 G=0.00 | CG              | Rotosymmetrical |
| Round Luminaire            |        | Diam.           | 34 mm          | Height                      | 48 mm         |                 |                 |
| Round Luminous Area        |        | Diam.           | 22 mm          | Height                      | 0 mm          |                 |                 |
| Horizontal Luminous Area   |        |                 | 0.000380 m2    | Emitting area on Plane 180° |               |                 | 0.000000 m2     |
| Emitting area on Plane 0°  |        |                 | 0.000000 m2    | Emitting area on Plane 270° |               |                 | 0.000000 m2     |
| Emitting area on Plane 90° |        |                 | 0.000000 m2    | Glare area at 76°           |               |                 | 0.000092 m2     |
| Coordinate system          |        | CG              |                | Symmetry Type               |               | Rotosymmetrical |                 |
| Date                       |        | 14-11-2023      |                | Maximum Gamma Angle         |               | 180             |                 |
| Measurement Distance       |        | 0.00            |                | Measurement Flux            |               | 140 lm          |                 |

LED Flux=164lm LED Power=1.4W Eff=85% EfcLed=117lm/W EfcLum=100lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=50000

C.I.E. 94 98 99 100 100  
 F UTE 1.00 A

D DIN 5040  
 B NBN  
 A60  
 BZ 1

Diam=34mm




Semipiani C

180.0 ——— 0.0

ULOR 0.01 %

DLOR 99.99 %

RN 0.01 %

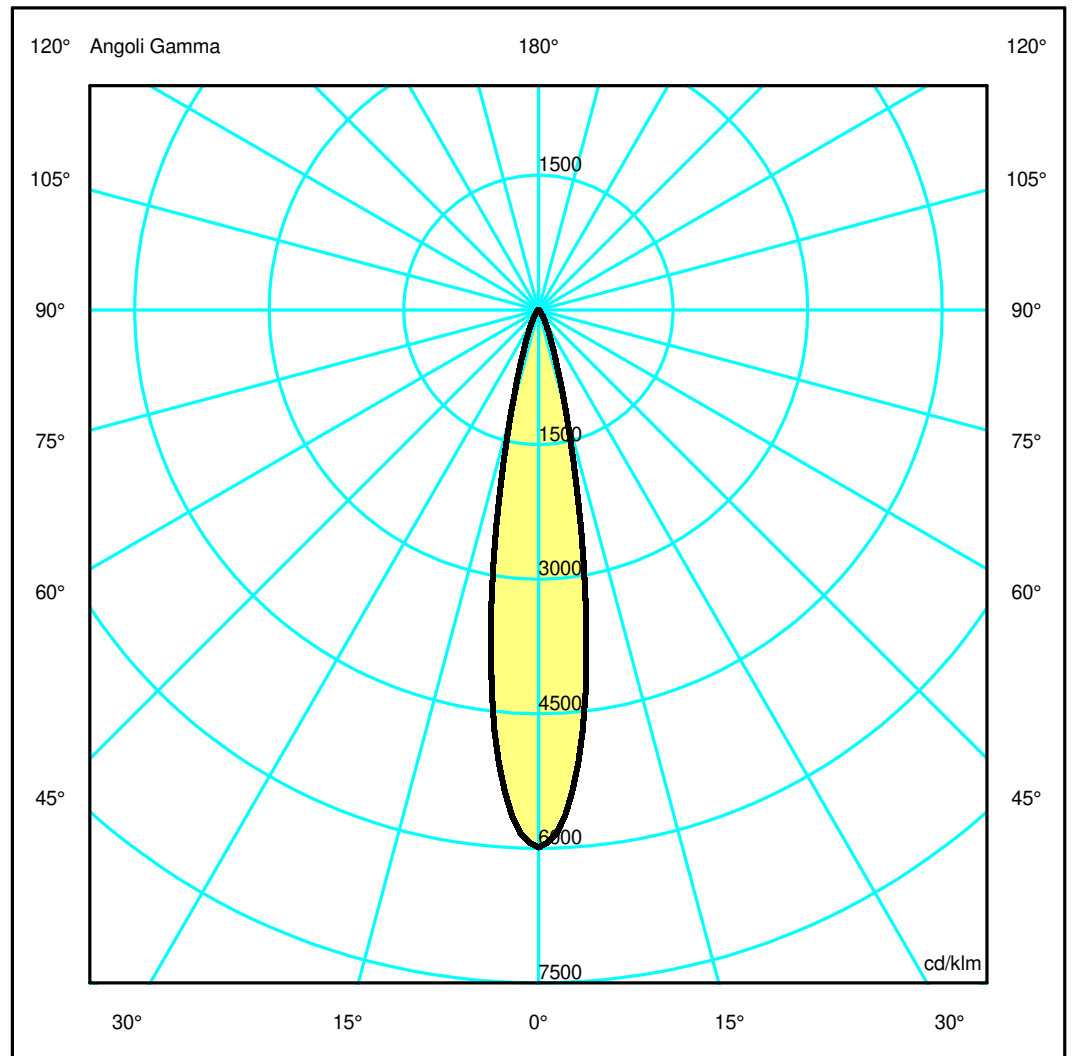

## Luminaire

Code NL4203110Y006  
 Name Everything 35 square 14° - cornice bianca- 2700K

## Measurerm.

Code FTS1602924-A  
 Name Everything 35 square 14° - cornice bianca- 2700K

|                            |        |                 |                |                             |               |                 |                 |
|----------------------------|--------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux             | 140 lm | Luminaire Power | 1.4 W          | Efficacy                    | 100.000 lm/W  | Efficiency      | 100.00%         |
| Source Flux                | 140 lm | Maximum value   | 5990.22 cd/klm | Position                    | C=0.00 G=0.00 | CG              | Rotosymmetrical |
| Round Luminaire            |        | Diam.           | 34 mm          | Height                      | 48 mm         |                 |                 |
| Round Luminous Area        |        | Diam.           | 22 mm          | Height                      | 0 mm          |                 |                 |
| Horizontal Luminous Area   |        | 0.000380 m2     |                | Emitting area on Plane 180° |               | 0.000000 m2     |                 |
| Emitting area on Plane 0°  |        | 0.000000 m2     |                | Emitting area on Plane 270° |               | 0.000000 m2     |                 |
| Emitting area on Plane 90° |        | 0.000000 m2     |                | Glare area at 76°           |               | 0.000092 m2     |                 |
| Coordinate system          |        | CG              |                | Symmetry Type               |               | Rotosymmetrical |                 |
| Date                       |        | 14-11-2023      |                | Maximum Gamma Angle         |               | 180             |                 |
| Measurement Distance       |        | 0.00            |                | Measurement Flux            |               | 140 lm          |                 |


LED Flux=164lm LED Power=1.4W Eff=85% EfcLed=117lm/W EfcLum=100lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(6K)=50000

|        |                  |            |      |
|--------|------------------|------------|------|
| C.I.E. | 94 98 99 100 100 | D DIN 5040 | A60  |
| F UTE  | 1.00 A           | B NBN      | BZ 1 |

### Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA   | 0.17 | 0.35 | 0.52 | 0.69 | 0.87 | OC   | 0.17 | 0.35 | 0.52 | 0.69 | 0.87 |
| OB   | 0.17 | 0.35 | 0.52 | 0.69 | 0.87 | OD   | 0.17 | 0.35 | 0.52 | 0.69 | 0.87 |

|    | Luminous Intensities [ cd/klm] |        |        |       |       |      |      |      |      |      |
|----|--------------------------------|--------|--------|-------|-------|------|------|------|------|------|
|    | 0                              | 5      | 15     | 25    | 35    | 45   | 55   | 65   | 75   | 85   |
| OA | 838.63                         | 709.90 | 165.24 | 35.18 | 10.91 | 4.21 | 2.88 | 1.77 | 0.99 | 0.36 |
| OB | 838.63                         | 709.90 | 165.24 | 35.18 | 10.91 | 4.21 | 2.88 | 1.77 | 0.99 | 0.36 |
| OC | 838.63                         | 709.90 | 165.24 | 35.18 | 10.91 | 4.21 | 2.88 | 1.77 | 0.99 | 0.36 |
| OD | 838.63                         | 709.90 | 165.24 | 35.18 | 10.91 | 4.21 | 2.88 | 1.77 | 0.99 | 0.36 |

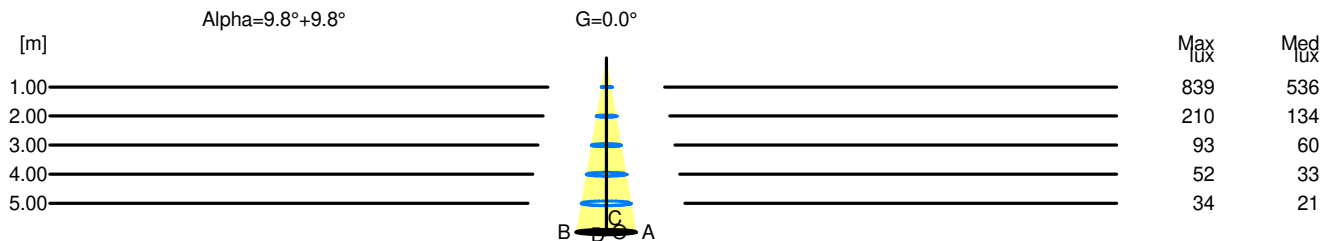

| H[m] | D[m] | Max lux | Med lux | Alpha=9.8°+9.8° | G=0.0 |
|------|------|---------|---------|-----------------|-------|
| 1.00 | 0.35 | 839     | 536     |                 |       |
| 2.00 | 0.69 | 210     | 134     |                 |       |
| 3.00 | 1.04 | 93      | 60      |                 |       |
| 4.00 | 1.39 | 52      | 33      |                 |       |
| 5.00 | 1.73 | 34      | 21      |                 |       |