


## Luminaire

Code NL4204234K006  
 Name Everything 55 700mA square34° - cornice bianca - 3000K

## Measurement

Code FTS1500343-B  
 Name Everything 55 700mA square34° - cornice bianca - 3000K

Luminaire Flux	613 lm	Luminaire Power	8.0 W	Efficacy	76.625 lm/W	Efficiency	100.00%
Source Flux	613 lm	Maximum value	2282.44 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	80 mm		
Round Luminous Area		Diam.	37 mm	Height	0 mm		
Horizontal Luminous Area			0.001075 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.000260 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		613 lm	
LED Flux=920lm LED Power=8W Eff=67% EfcLed=115lm/W EfcLum=77lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(24k)=145000h							
C.I.E.	91 97 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

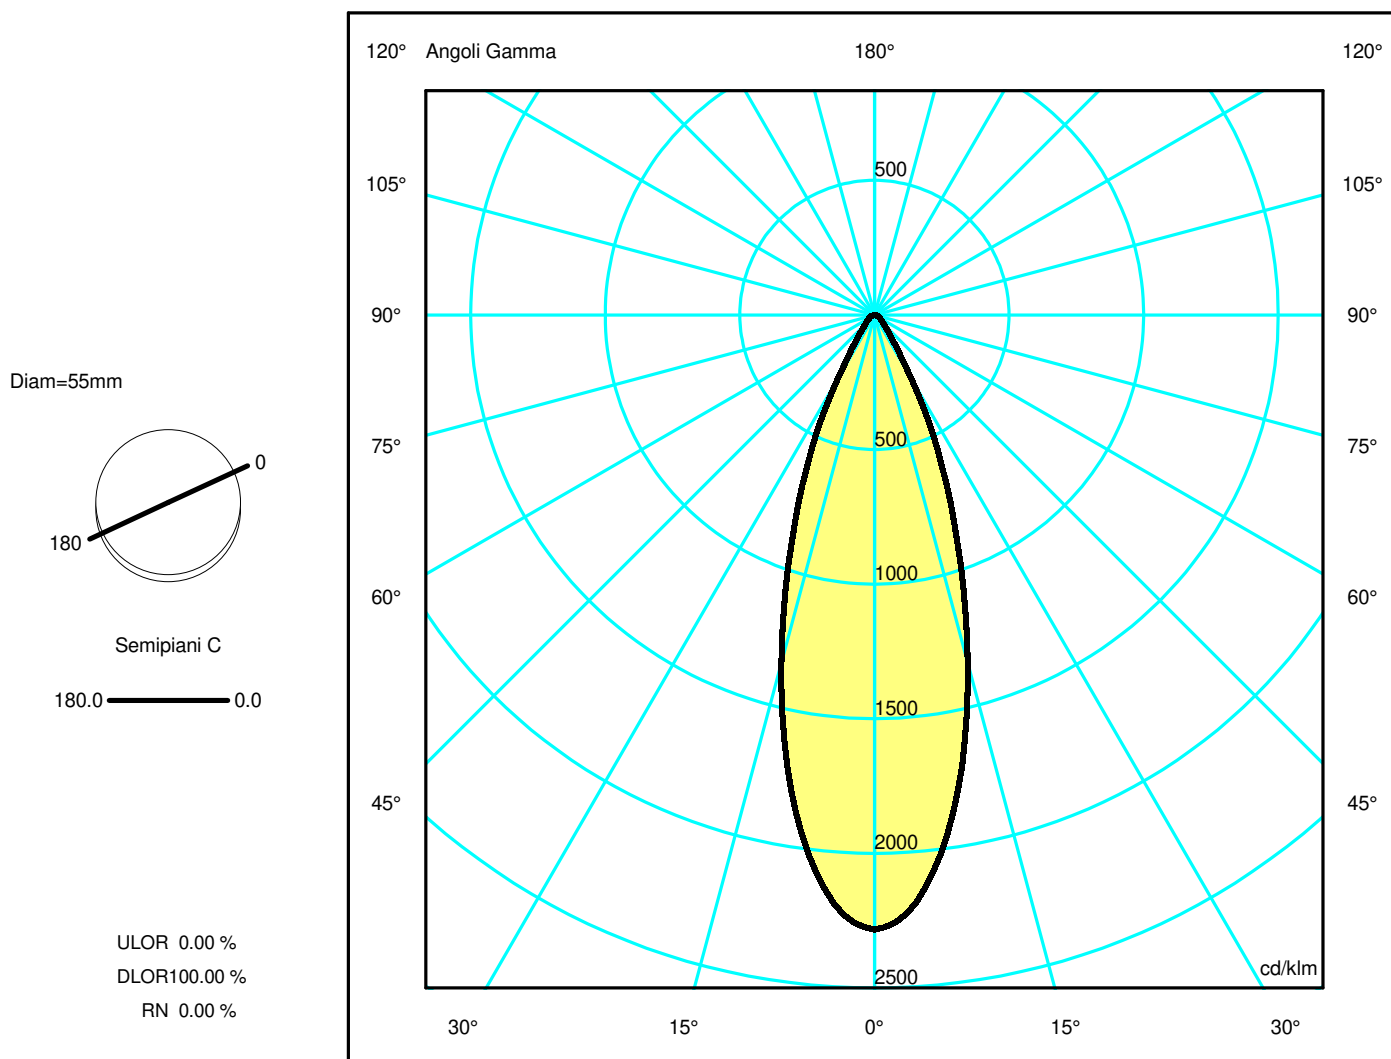

## Luminaire

Code NL4204234K006  
 Name Everything 55 700mA square34° - cornice bianca - 3000K

## Measurerm.

Code FTS1500343-B  
 Name Everything 55 700mA square34° - cornice bianca - 3000K

Luminaire Flux	613 lm	Luminaire Power	8.0 W	Efficacy	76.625 lm/W	Efficiency	100.00%
Source Flux	613 lm	Maximum value	2282.44 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	80 mm		
Round Luminous Area		Diam.	37 mm	Height	0 mm		
Horizontal Luminous Area		0.001075 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000260 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		613 lm	


LED Flux=920lm LED Power=8W Eff=67% EfcLed=115lm/W EfcLum=77lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(24k)=145000h

C.I.E.	91 97 99 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.31	0.62	0.93	1.24	1.54	OC	0.31	0.62	0.93	1.24	1.54
OB	0.31	0.62	0.93	1.24	1.54	OD	0.31	0.62	0.93	1.24	1.54

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1399.13	1310.78	820.08	340.95	79.54	30.55	17.60	11.46	6.67	2.00
OB	1399.13	1310.78	820.08	340.95	79.54	30.55	17.60	11.46	6.67	2.00
OC	1399.13	1310.78	820.08	340.95	79.54	30.55	17.60	11.46	6.67	2.00
OD	1399.13	1310.78	820.08	340.95	79.54	30.55	17.60	11.46	6.67	2.00

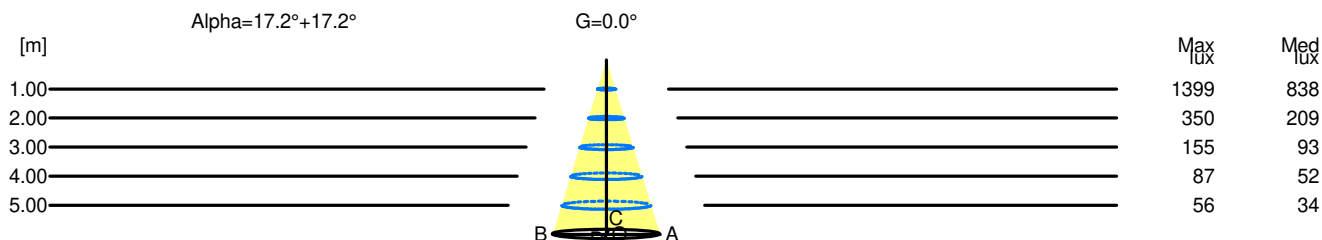

H[m]	D[m]	Max lux	Med lux	Alpha=17.2°+17.2°	G=0.0
1.00	0.62	1399	838		
2.00	1.24	350	209		
3.00	1.85	155	93		
4.00	2.47	87	52		
5.00	3.09	56	34		