

## Luminaire


Code T082900  
Name CUNEO 17W 4000K ruggine

## Measuram.

Code FDS0000920  
Name CUNEO 17W 4000K ruggine

Efficiency	101.86%	Coordinate system	CG	Total Flux	668.30 lm
Maximum value	3276.96 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical	
Rectangular Luminaire	Length 200 mm	Width	70 mm	Height	200 mm
Rectangular Luminous Area	Length 165 mm	Width	65 mm	Height	0 mm
Horizontal Luminous Area	0.010725 m2	Emitting area on Plane 180°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2
Emitting area on Plane 0°	0.000000 m2	Glare area at 76°	0.002595 m2		
Emitting area on Plane 90°	0.000000 m2				
Date	23-04-1970	Maximum Gamma Angle	180		
Measurement Distance	0.00	Measurement Flux	668.30 lm		
6 LED WHT 6 led					
C.I.E.	94 99 100 100 102	D DIN 5040	A60		
F UTE	1.02 A	B NBN	BZ 1		


200mm x 70mm



Semipiani C

180.0 ——— 0.0  
270.0 ——— 90.0

ULOR 0.00 %  
DLOR 101.86 %  
RN 0.00 %

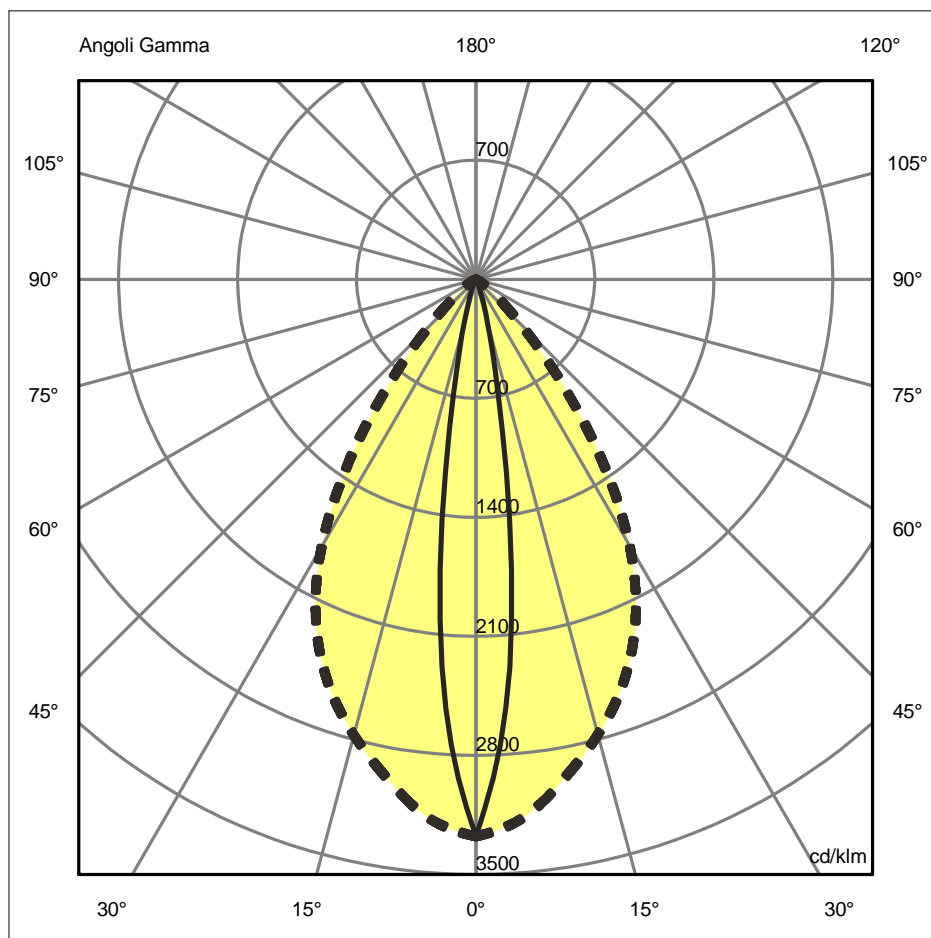

## Luminaire

Code T082900  
Name CUNEO 17W 4000K ruggine

## Measurerm.

Code FDS0000920  
Name CUNEO 17W 4000K ruggine


Efficiency	101.86%	Coordinate system	CG	Total Flux	668.30 lm	
Maximum value	3276.96 cd/klm	Position	C=0.00 G=0.00	Double Symmetrical		
Rectangular Luminaire	Length	200 mm	Width	70 mm	Height	200 mm
Rectangular Luminous Area	Length	165 mm	Width	65 mm	Height	0 mm
Horizontal Luminous Area	0.010725 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.002595 m2		
Date	23-04-1970	Maximum Gamma Angle	180			
Measurement Distance	0.00	Measurement Flux	668.30 lm			
6 LED WHT 6 led						
C.I.E.	94 99 100 100 102	D DIN 5040	A60			
F UTE	1.02 A	B NBN	BZ 1			

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.13	0.26	0.38	0.51	0.64	OC	0.62	1.24	1.85	2.47	3.09
OB	0.13	0.26	0.38	0.51	0.64	OD	0.62	1.24	1.85	2.47	3.09

### Luminous Intensities [ cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	2189.99	1529.72	178.28	26.39	12.10	6.60	4.40	1.10	0.00	0.00
OB	2189.99	1529.72	178.28	26.39	12.10	6.60	4.40	1.10	0.00	0.00
OC	2189.99	2125.51	1853.77	1485.31	857.80	249.86	52.96	14.96	4.60	0.00
OD	2189.99	2125.51	1853.77	1485.31	857.80	249.86	52.96	14.96	4.60	0.00

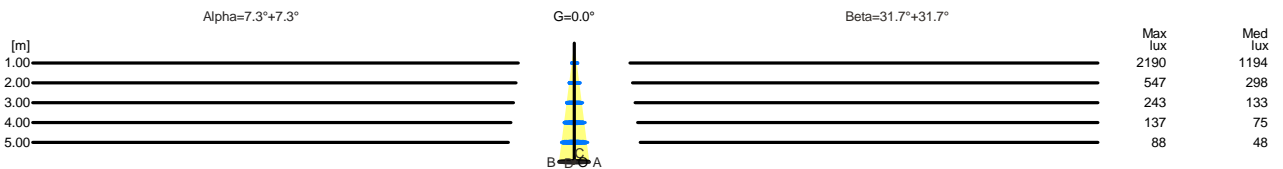

H[m]	D[m]	Max lux	Med lux	Alpha=7.3°+7.3°	G=0.0
1.00	0.26	2190	1194		
2.00	0.51	547	298		
3.00	0.77	243	133		
4.00	1.02	137	75		
5.00	1.28	88	48		

H[m]	D[m]	Max lux	Med lux	Beta=31.7°+31.7°	G=0.0
1.00	1.24	2190	1194		
2.00	2.47	547	298		
3.00	3.71	243	133		
4.00	4.94	137	75		
5.00	6.18	88	48		