

## Luminaire


Code T42104NW00  
Name EFFETTO ROUND 4 FASCI STRETTI 18W 3000K grigio bianco

## Measurum.

Code FTS0000861  
Name EFFETTO ROUND 4 FASCI STRETTI 18W 3000K grigio bianco

Efficiency	100.00%	Coordinate system	CG	Total Flux	26.43 lm	
Maximum value	5735.08 cd/klm	Position	C=195.00 G=89.00	Asymmetrical		
Rectangular Luminaire	Length	160 mm	Width	160 mm	Height	160 mm
Rectangular Luminous Area	Length	50 mm	Width	50 mm	Height	0 mm
Horizontal Luminous Area	0.002500 m2	Emitting area on Plane 180°		0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°		0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°		0.000605 m2		
Date	18-12-2013	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		26.43 lm		
Imax=5100 cd/klm - LED Flux=714 lm - LED Power=8.4 W - Eff=37 % - EfcLED=85 lm/W - EfcLum=15 lm/W Ra=80 Typ - SDCM=4 - Life=L70(14K)>81600 ore						
C.I.E.	43 50 46 50 100	D DIN 5040	C31			
F UTE	0.50 G + 0.50 T	B NBN	BZ 5 / 0.8 / BZ 6 / 1.25 / BZ 7 / 1.5 / BZ 8 / 2 / BZ 9 / 2.5 / B			


160mm x 160mm



Semipiani C

180.0 ——— 0.0  
270.0 - - - - - 90.0

ULOR 50.00 %  
DLOR 50.00 %  
RN 50.00 %

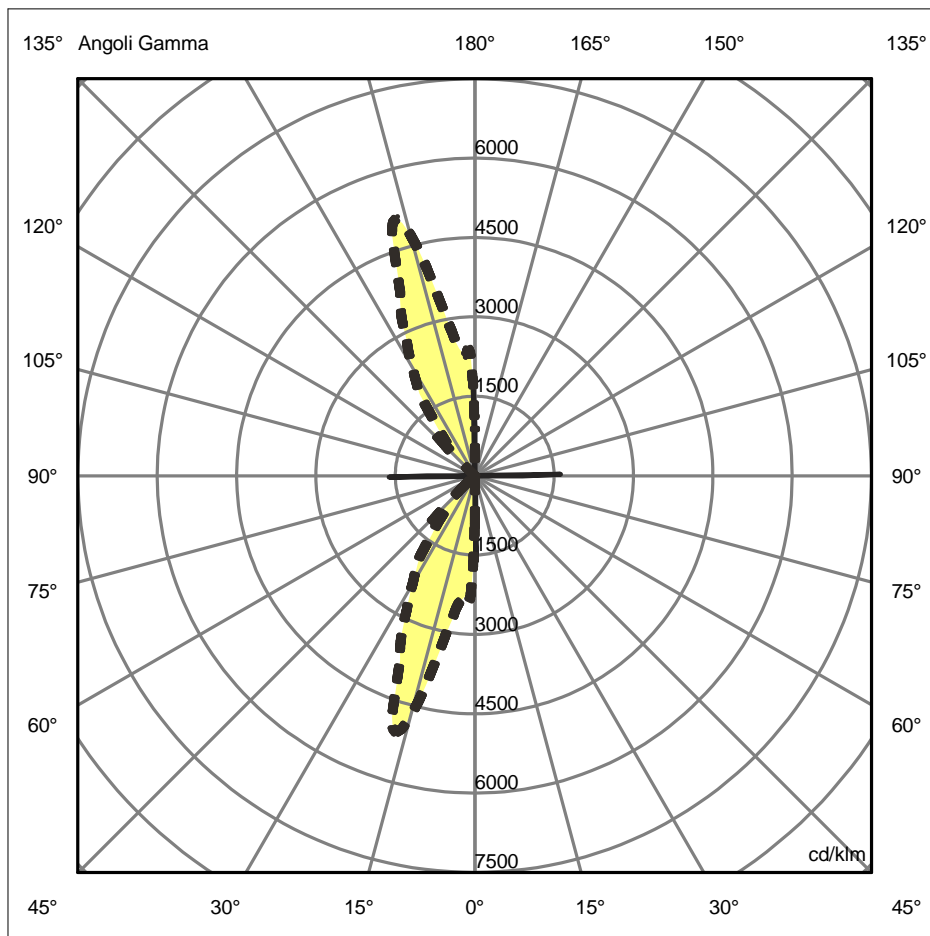

**Luminaire**

Code T42104NW00  
 Name EFFETTO ROUND 4 FASCI STRETTI 18W 3000K grigio bianco

**Measurement**

Code FTS0000861  
 Name EFFETTO ROUND 4 FASCI STRETTI 18W 3000K grigio bianco

Efficiency	100.00%	Coordinate system	CG	Total Flux	26.43 lm	
Maximum value	5735.08 cd/klm	Position	C=195.00 G=89.00	Asymmetrical		
Rectangular Luminaire Rectangular Luminous Area	Length Length	160 mm 50 mm	Width Width	160 mm 50 mm	Height Height	160 mm 0 mm
Horizontal Luminous Area	0.002500 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°		0.000605 m2	
Date	18-12-2013	Maximum Gamma Angle		180		
Measurement Distance	0.00	Measurement Flux		26.43 lm		
Imax=5100 cd/klm - LED Flux=714 lm - LED Power=8.4 W - Eff=37 % - EfcLED=85 lm/W - EfcLum=15 lm/W Ra=80 Typ - SDCM=4 - Life=L70(14K)>81600 ore						
C.I.E.	43 50 46 50 100	D DIN 5040	C31			
F UTE	0.50 G + 0.50 T	B NBN	BZ 5 / 0.8 / BZ 6 / 1.25 / BZ 7 / 1.5 / BZ 8 / 2 / BZ 9 / 2.5 / B			

Apertura a sinistra non trovata, gamma =-89

Apertura a sinistra non trovata, gamma =-89

Apertura a sinistra non trovata, gamma =-89