

## Luminaire


Code T42121LW00  
 Name EFFETTO ROUND 1 FASCIO LARGO 4,5W 3000K grigio bianco

## Measuram.

Code FTS0000837  
 Name EFFETTO ROUND 1 FASCIO LARGO 4,5W 3000K grigio bianco

Efficiency	100.00%	Coordinate system	CG	Total Flux	9.40 lm	
Maximum value	2676.91 cd/klm	Position	C=205.00 G=20.00	Asymmetrical		
Rectangular Luminaire Rectangular Luminous Area	Length Length	160 mm 50 mm	Width Width	160 mm 50 mm	Height Height	160 mm 0 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.002500 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000605 m2		
Date Measurement Distance	18-12-2013 0.00		Maximum Gamma Angle Measurement Flux	180 9.40 lm		
Imax=2514 cd/klm - LED Flux=178 lm - LED Power=2.1 W - Eff=53 % - EfcLED=85 lm/W - EfcLum=21 lm/W Ra=80 Typ - SDCM=4 - Life=L70(14K)>81600 ore						
C.I.E.	95 98 99 100 100		D DIN 5040 B NBN	A60 BZ 1		
F UTE	1.00 A					


160mm x 160mm



Semipiani C

180.0 ——— 0.0  
 270.0 - - - - - 90.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

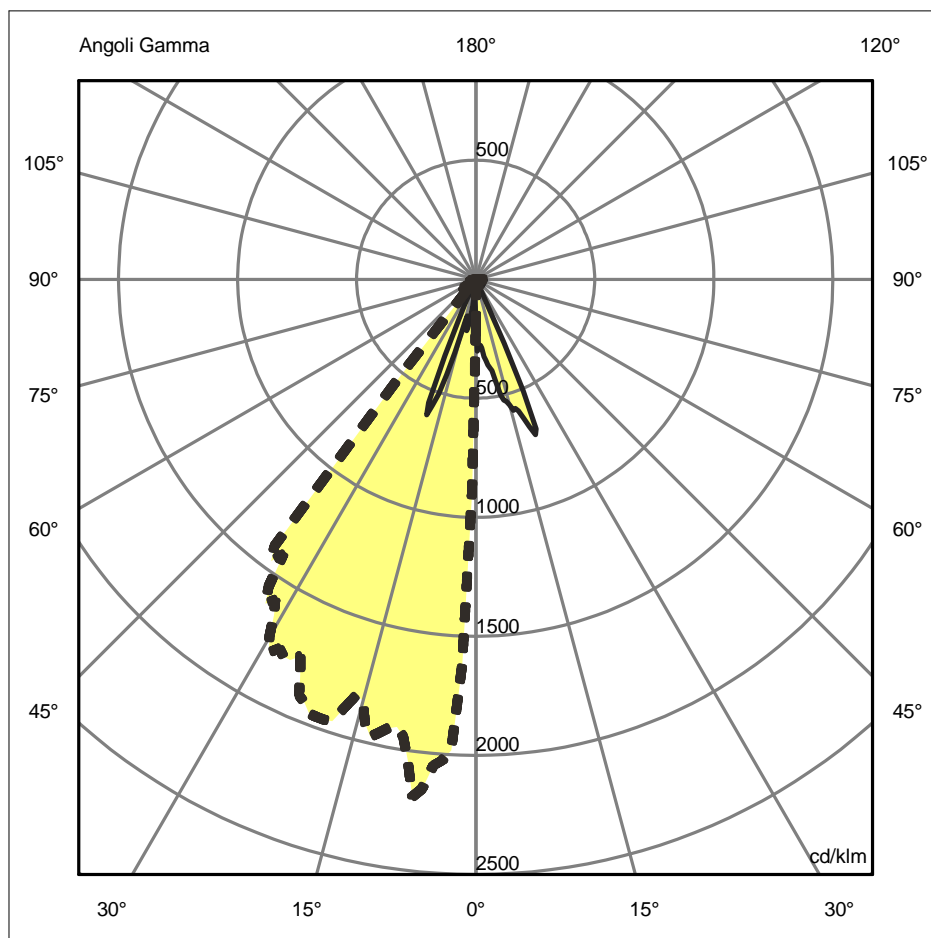

## Luminaire

Code T42121LW00  
Name EFFETTO ROUND 1 FASCIO LARGO 4,5W 3000K grigio bianco

## Measur.

Code FTS0000837  
Name EFFETTO ROUND 1 FASCIO LARGO 4,5W 3000K grigio bianco


Efficiency	100.00%	Coordinate system	CG	Total Flux	9.40 lm	
Maximum value	2676.91 cd/klm	Position	C=205.00 G=20.00	Asymmetrical		
Rectangular Luminaire Rectangular Luminous Area	Length Length	160 mm 50 mm	Width Width	160 mm 50 mm	Height Height	160 mm 0 mm
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.002500 m2 0.000000 m2 0.000000 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.000000 m2 0.000000 m2 0.000605 m2		
Date Measurement Distance	18-12-2013 0.00		Maximum Gamma Angle Measurement Flux	180 9.40 lm		
Imax=2514 cd/klm - LED Flux=178 lm - LED Power=2.1 W - Eff=53 % - EfcLED=85 lm/W - EfcLum=21 lm/W Ra=80 Typ - SDCM=4 - Life=L70(14K)>81600 ore						
C.I.E. F UTE	95 98 99 100 100 1.00 A		D DIN 5040 B NBN	A60 BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.06	0.11	0.17	0.22	0.28	OC	0.01	0.03	0.04	0.06	0.07
OB	0.26	0.51	0.77	1.02	1.28	OD	0.82	1.65	2.47	3.30	4.12

### Luminous Intensities [ cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	1.93	2.72	5.14	0.61	0.12	0.17	0.12	0.05	0.04	0.17
OB	1.93	0.48	2.18	0.26	0.00	0.27	0.20	0.20	0.00	0.15
OC	1.93	0.48	0.03	0.00	0.03	0.29	0.00	0.02	0.03	0.07
OD	1.93	19.28	17.22	16.42	13.23	0.15	0.60	0.00	0.00	0.00

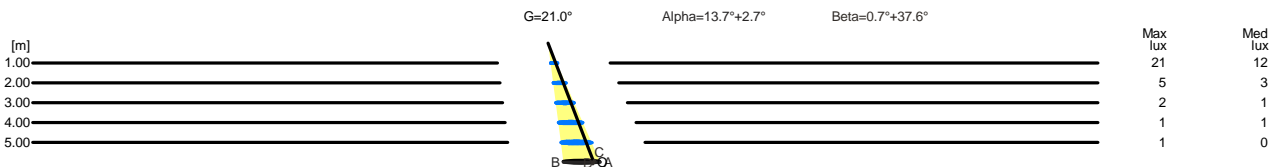

H[m]	D[m]	Max lux	Med lux	Alpha=13.7°+2.7°	G=21.0
1.00	0.31	21	12		
2.00	0.62	5	3		
3.00	0.93	2	1		
4.00	1.24	1	1		
5.00	1.56	1	0		

H[m]	D[m]	Max lux	Med lux	Beta=37.6°+0.7°	G=0.0
1.00	0.84	21	12		
2.00	1.68	5	3		
3.00	2.51	2	1		
4.00	3.35	1	1		
5.00	4.19	1	0		