

Luminaire

Code TB43322+AP90200
Name VECTOR 40 TRK12 PENDANT 940 WF TITAN. + LENS FOR ELLIPTICAL EMISSION

Measurement


Code FTS1800572
Name VECTOR 40 TRK12 PENDANT 940 WF TITAN. + LENS FOR ELLIPTICAL EMISSION

| | | | | | | | |
|----------------------------|--------|-----------------|----------------|-----------------------------|---------------|--------------------|--------------------|
| Luminaire Flux | 346 lm | Luminaire Power | 10.0 W | Efficacy | 34.603 lm/W | Efficiency | 100.00% |
| Source Flux | 346 lm | Maximum value | 2688.01 cd/klm | Position | C=0.00 G=0.00 | CG | Double Symmetrical |
| Round Luminaire | | Diam. | 40 mm | Height | 103 mm | | |
| Round Luminous Area | | Diam. | 27 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | | 0.000573 m2 | Emitting area on Plane 180° | | | 0.000000 m2 |
| Emitting area on Plane 0° | | | 0.000000 m2 | Emitting area on Plane 270° | | | 0.000000 m2 |
| Emitting area on Plane 90° | | | 0.000000 m2 | Glare area at 76° | | | 0.000139 m2 |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 14-05-2018 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 346 lm | |

LED Flux=906,8lm LED Power=8W Eff=38% EfcLed=113lm/W EfcLum=35lm/W CCT=4000K Ra=90 SDCM=2 L70(6K)=50000h

C.I.E. 95 99 100 100 100
F UTE 1.00 A

D DIN 5040
B NBN
A60
BZ 1

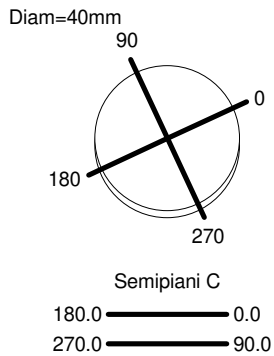

ULOR 0.00 %
DLOR100.00 %
RN 0.00 %



Luminaire

Code TB43322+AP90200
Name VECTOR 40 TRK12 PENDANT 940 WF TITAN. + LENS FOR ELLIPTICAL EMISSION

Measurerm.

Code FTS1800572
Name VECTOR 40 TRK12 PENDANT 940 WF TITAN. + LENS FOR ELLIPTICAL EMISSION

| | | | | | | | |
|----------------------------|--------|-------------------------|----------------|-----------------------------|---------------|-------------------------|--------------------|
| Luminaire Flux | 346 lm | Luminaire Power | 10.0 W | Efficacy | 34.603 lm/W | Efficiency | 100.00% |
| Source Flux | 346 lm | Maximum value | 2688.01 cd/klm | Position | C=0.00 G=0.00 | CG | Double Symmetrical |
| Round Luminaire | | Diam. | 40 mm | Height | 103 mm | | |
| Round Luminous Area | | Diam. | 27 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.000573 m ² | | Emitting area on Plane 180° | | 0.000000 m ² | |
| Emitting area on Plane 0° | | 0.000000 m ² | | Emitting area on Plane 270° | | 0.000000 m ² | |
| Emitting area on Plane 90° | | 0.000000 m ² | | Glare area at 76° | | 0.000139 m ² | |
| Coordinate system | | CG | | Symmetry Type | | Double Symmetrical | |
| Date | | 14-05-2018 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 346 lm | |


LED Flux=906,8lm LED Power=8W Eff=38% EfcLed=113lm/W EfcLum=35lm/W CCT=4000K Ra=90 SDCM=2 L70(6K)=50000h

| | | | |
|--------|-------------------|------------|------|
| C.I.E. | 95 99 100 100 100 | D DIN 5040 | A60 |
| F UTE | 1.00 A | B NBN | BZ 1 |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.23 | 0.47 | 0.70 | 0.93 | 1.17 | OC | 0.34 | 0.68 | 1.02 | 1.36 | 1.70 |
| OB | 0.23 | 0.47 | 0.70 | 0.93 | 1.17 | OD | 0.34 | 0.68 | 1.02 | 1.36 | 1.70 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|--------|--------|--------|--------|-------|-------|------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 930.13 | 840.98 | 376.26 | 98.34 | 23.12 | 6.18 | 1.98 | 1.17 | 0.73 | 0.24 |
| OB | 930.13 | 840.98 | 376.26 | 98.34 | 23.12 | 6.18 | 1.98 | 1.17 | 0.73 | 0.24 |
| OC | 930.13 | 882.77 | 590.79 | 289.32 | 107.54 | 28.87 | 13.32 | 7.21 | 1.51 | 0.26 |
| OD | 930.13 | 882.77 | 590.79 | 289.32 | 107.54 | 28.87 | 13.32 | 7.21 | 1.51 | 0.26 |

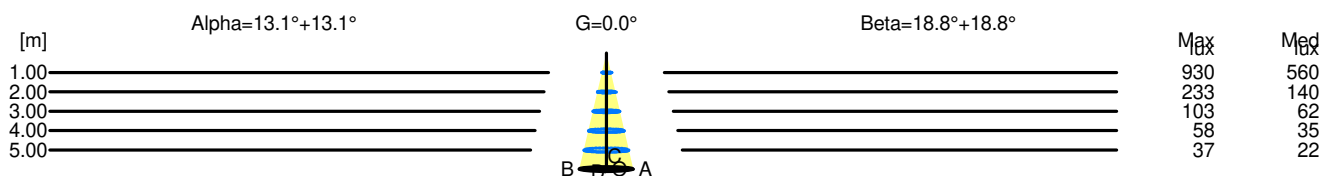

| H[m] | D[m] | Max lux | Med lux | Alpha=13.1°+13.1° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.47 | 930 | 560 | | |
| 2.00 | 0.93 | 233 | 140 | | |
| 3.00 | 1.40 | 103 | 62 | | |
| 4.00 | 1.86 | 58 | 35 | | |
| 5.00 | 2.33 | 37 | 22 | | |

| H[m] | D[m] | Max lux | Med lux | Beta=18.8°+18.8° | G=0.0 |
|------|------|---------|---------|------------------|-------|
| 1.00 | 0.68 | 930 | 560 | | |
| 2.00 | 1.36 | 233 | 140 | | |
| 3.00 | 2.04 | 103 | 62 | | |
| 4.00 | 2.72 | 58 | 35 | | |
| 5.00 | 3.40 | 37 | 22 | | |