

## Luminaire

Code TC41204+AP91300  
 Name GOPLE 80 PENDANT TRK12 930 FL BLACK + SOFT FILTER

## Measurement

Code FTS2200233  
 Name GOPLE 80 PENDANT TRK12 930 FL BLACK + SOFT FILTER

Luminaire Flux	1138 lm	Luminaire Power	24.0 W	Efficacy	47.437 lm/W	Efficiency	100.00%
Source Flux	1138 lm	Maximum value	3862.92 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	77 mm	Height	150 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-09-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1138 lm	
LED Flux=2435lm LED Power=22W Eff=47% EfcLed=113lm/W EfcLum=47lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	98 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		


Diam=77mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

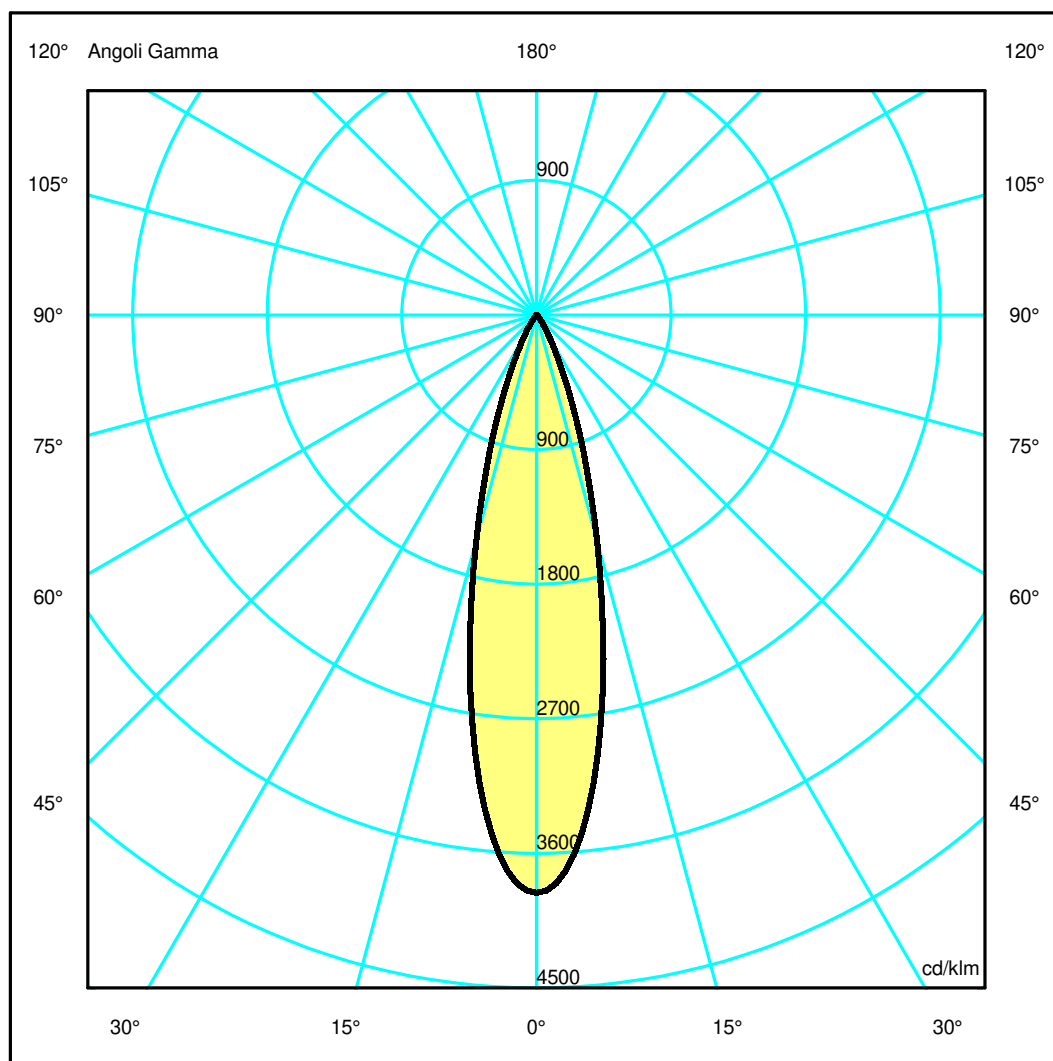

## Luminaire

Code TC41204+AP91300  
Name GOPLE 80 PENDANT TRK12 930 FL BLACK + SOFT FILTER

## Measurerm.


Code FTS2200233  
Name GOPLE 80 PENDANT TRK12 930 FL BLACK + SOFT FILTER

Luminaire Flux	1138 lm	Luminaire Power	24.0 W	Efficacy	47.437 lm/W	Efficiency	100.00%
Source Flux	1138 lm	Maximum value	3862.92 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	77 mm	Height	150 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-09-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1138 lm	
LED Flux=2435lm LED Power=22W Eff=47% EfcLed=113lm/W EfcLum=47lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	98 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.23	0.46	0.69	0.92	1.16	OC	0.23	0.46	0.69	0.92	1.16
OB	0.23	0.46	0.69	0.92	1.16	OD	0.23	0.46	0.69	0.92	1.16

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	4397.85	3958.36	1774.71	451.58	85.85	17.97	6.54	4.66	2.90	0.67
OB	4397.85	3958.36	1774.71	451.58	85.85	17.97	6.54	4.66	2.90	0.67
OC	4397.85	3958.36	1774.71	451.58	85.85	17.97	6.54	4.66	2.90	0.67
OD	4397.85	3958.36	1774.71	451.58	85.85	17.97	6.54	4.66	2.90	0.67

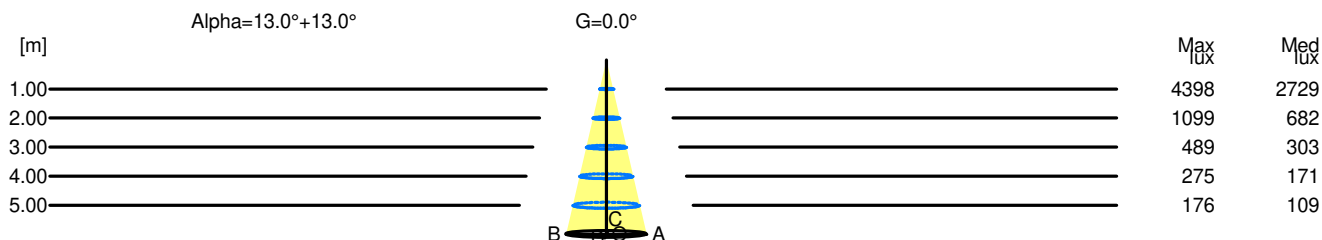

H[m]	D[m]	Max lux	Med lux	Alpha=13.0°+13.0°	G=0.0
1.00	0.46	4398	2729		
2.00	0.92	1099	682		
3.00	1.39	489	303		
4.00	1.85	275	171		
5.00	2.31	176	109		