

Luminaire

Code TC51204
Name GOPLE 60 PENDANT TRK12 930 FL BLACK

Measurerm.

Code FTS2200200
Name GOPLE 60 PENDANT TRK12 930 FL BLACK

Luminaire Flux	598 lm	Luminaire Power	10.0 W	Efficacy	59.849 lm/W	Efficiency	100.00%
Source Flux	598 lm	Maximum value	5684.10 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-09-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		598 lm	
LED Flux=867lm LED Power=7.9W Eff=69% EfcLed=110lm/W EfcLum=60lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

Diam=55mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

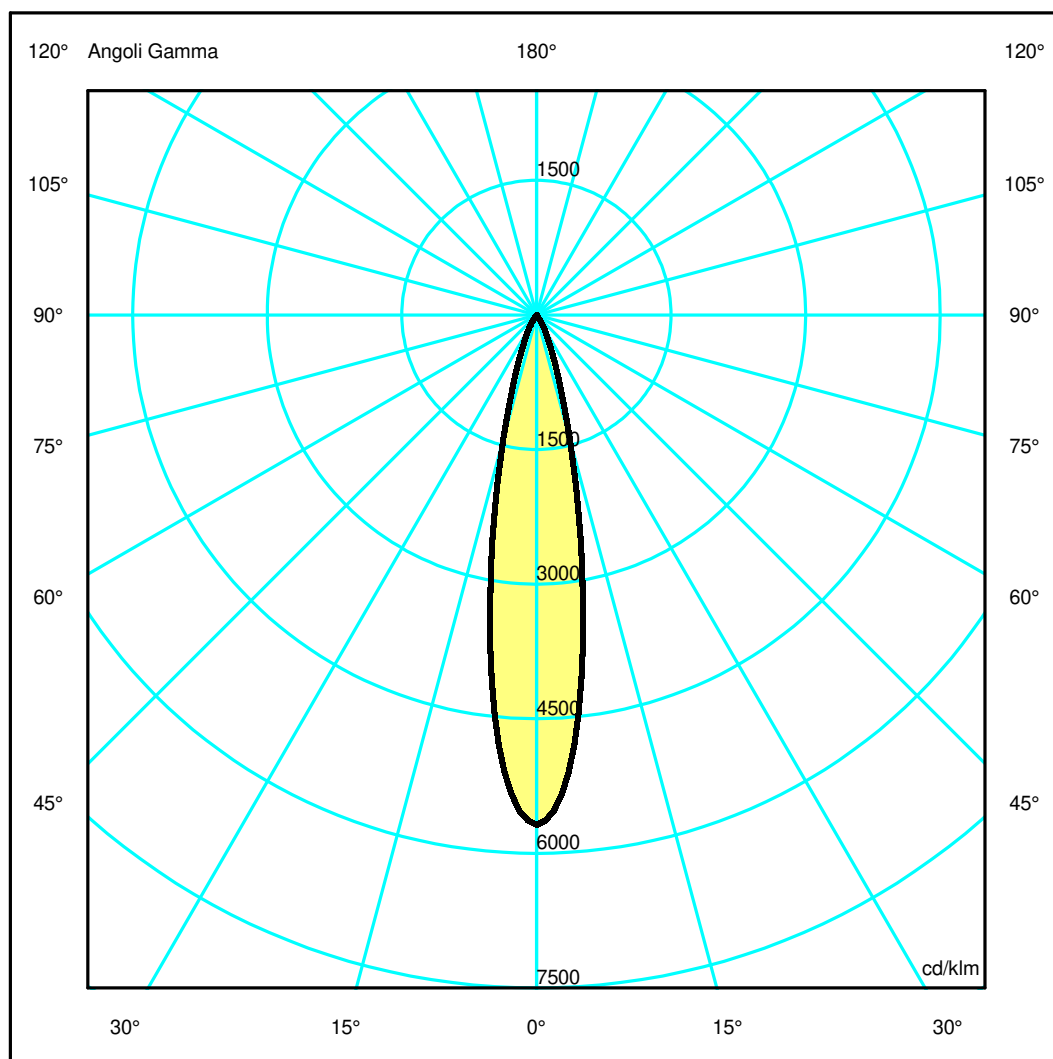

Luminaire

Code TC51204
Name GOPLE 60 PENDANT TRK12 930 FL BLACK

Measurerm.


Code FTS2200200
Name GOPLE 60 PENDANT TRK12 930 FL BLACK

Luminaire Flux	598 lm	Luminaire Power	10.0 W	Efficacy	59.849 lm/W	Efficiency	100.00%
Source Flux	598 lm	Maximum value	5684.10 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	110 mm		
Round Luminous Area		Diam.	35 mm	Height	0 mm		
Horizontal Luminous Area		0.000962 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000233 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		21-09-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		598 lm	
LED Flux=867lm LED Power=7.9W Eff=69% EfcLed=110lm/W EfcLum=60lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h							
C.I.E.	99	100	100	100		D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.36	0.54	0.72	0.91	OC	0.18	0.36	0.54	0.72	0.91
OB	0.18	0.36	0.54	0.72	0.91	OD	0.18	0.36	0.54	0.72	0.91

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3401.88	2880.49	854.97	186.57	25.63	4.56	1.85	0.54	0.00	0.00
OB	3401.88	2880.49	854.97	186.57	25.63	4.56	1.85	0.54	0.00	0.00
OC	3401.88	2880.49	854.97	186.57	25.63	4.56	1.85	0.54	0.00	0.00
OD	3401.88	2880.49	854.97	186.57	25.63	4.56	1.85	0.54	0.00	0.00

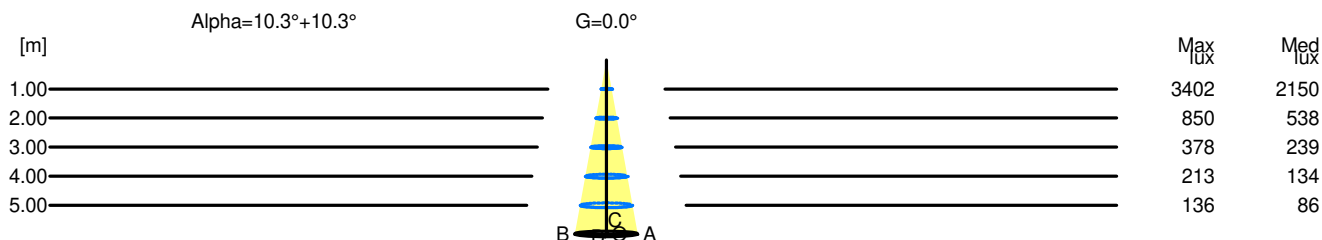

H[m]	D[m]	Max lux	Med lux	Alpha=10.3°+10.3°	G=0.0
1.00	0.36	3402	2150		
2.00	0.72	850	538		
3.00	1.09	378	239		
4.00	1.45	213	134		
5.00	1.81	136	86		