

Luminaire

Code FT41204
Name OBICE MINI FUNIVIA OUT 930 WF NRO

Measurem.

Code FTS2500080
Name OBICE MINI FUNIVIA OUT 930 WF NRO

Luminaire Flux	456 lm	Luminaire Power	6.5 W	Efficacy	70.154 lm/W	Efficiency	100.00%
Source Flux	456 lm	Maximum value	2171.19 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	70 mm	Height	90 mm		
Round Luminous Area		Diam.	30 mm	Height	0 mm		
Horizontal Luminous Area		0.000707 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000171 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		13-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		456 lm	
LED Flux=732lm LED Power=5.7W Eff=62% EfcLed=129lm/W EfcLum=70lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(24k)=145000h							
C.I.E.	93 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


Diam=70mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

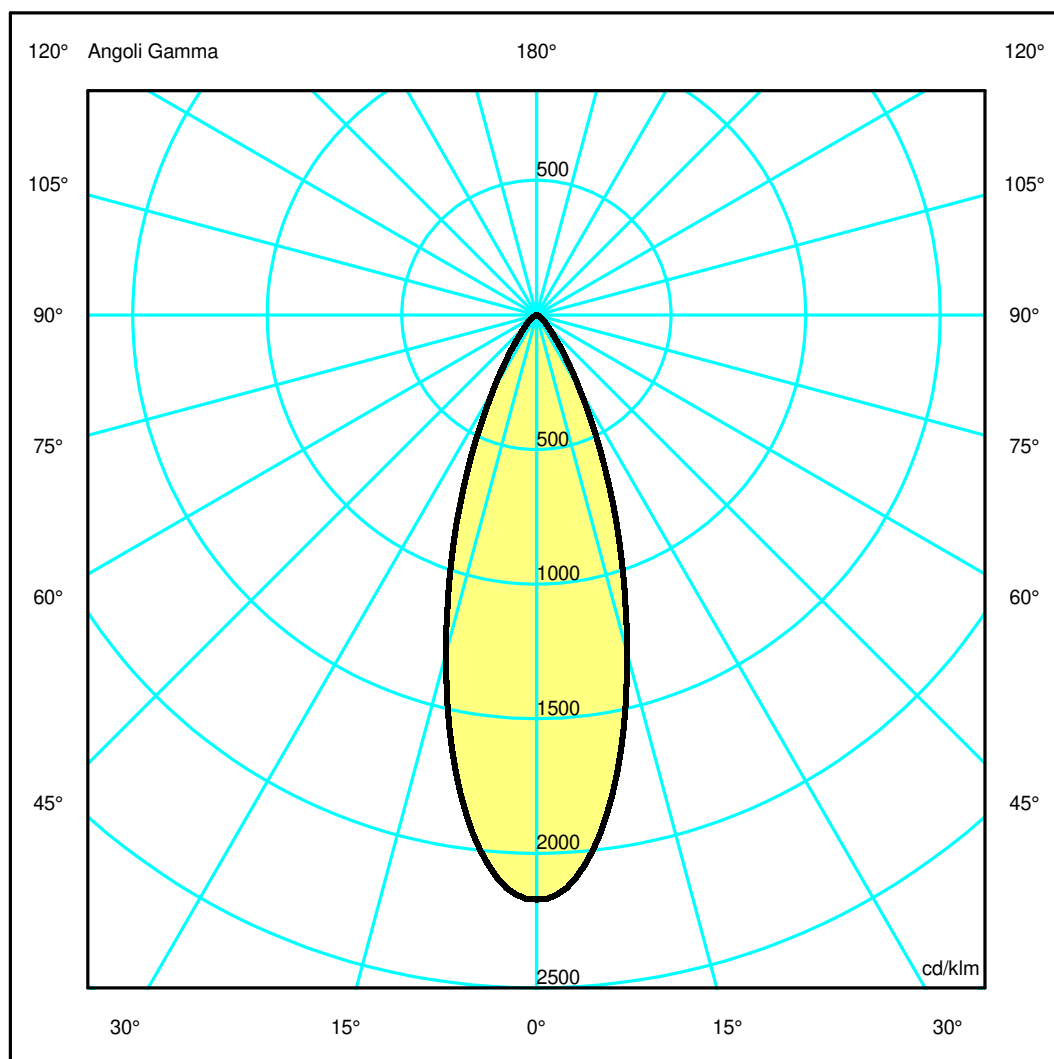

Luminaire

Code FT41204
Name OBICE MINI FUNIVIA OUT 930 WF NRO

Measurem.


Code FTS2500080
Name OBICE MINI FUNIVIA OUT 930 WF NRO

Luminaire Flux	456 lm	Luminaire Power	6.5 W	Efficacy	70.154 lm/W	Efficiency	100.00%
Source Flux	456 lm	Maximum value	2171.19 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	70 mm	Height	90 mm		
Round Luminous Area		Diam.	30 mm	Height	0 mm		
Horizontal Luminous Area		0.000707 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000171 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		13-03-2025		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		456 lm	
LED Flux=732lm LED Power=5.7W Eff=62% EfcLed=129lm/W EfcLum=70lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(24k)=145000h							
C.I.E.	93 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.32	0.63	0.95	1.27	1.59	OC	0.32	0.63	0.95	1.27	1.59
OB	0.32	0.63	0.95	1.27	1.59	OD	0.32	0.63	0.95	1.27	1.59

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	990.06	935.34	593.61	258.83	80.96	26.90	10.04	3.86	1.27	0.22
OB	990.06	935.34	593.61	258.83	80.96	26.90	10.04	3.86	1.27	0.22
OC	990.06	935.34	593.61	258.83	80.96	26.90	10.04	3.86	1.27	0.22
OD	990.06	935.34	593.61	258.83	80.96	26.90	10.04	3.86	1.27	0.22

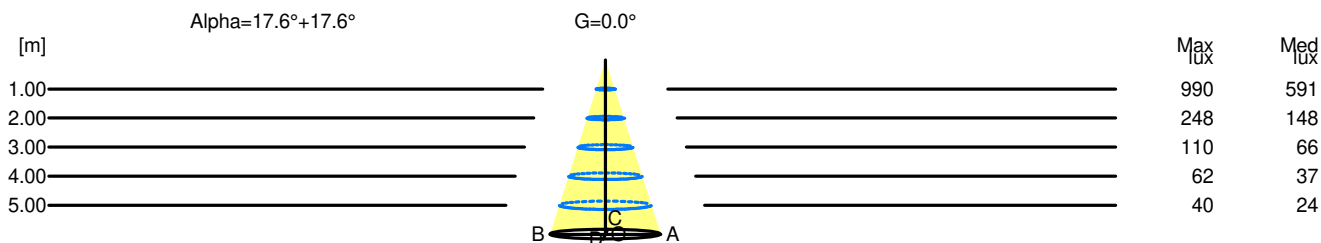

H[m]	D[m]	Max lux	Med lux	Alpha=17.6°+17.6°	G=0.0
1.00	0.63	990	591		
2.00	1.27	248	148		
3.00	1.90	110	66		
4.00	2.54	62	37		
5.00	3.17	40	24		