

## Luminaire


Code 0941010A  
Name NULL VECTOR SOSPENSIONE ROSSO

## Measurment.

Code FTS1400829  
Name NULL VECTOR SOSPENSIONE ROSSO

Efficiency	41.10%	Coordinate system	CG	Total Flux	470.00 lm
Maximum value	159.70 cd/klm	Position	C=0.00 G=0.00	Rotosymmetrical	
Round Luminaire	Diam. 135 mm	Height	155 mm		
Round Luminous Area	Diam. 133 mm	Height	0 mm		
Horizontal Luminous Area	0.013893 m2	Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°	0.003361 m2		
Date	10-11-2014	Maximum Gamma Angle	180		
Measurement Distance	0.00	Measurement Flux	470.00 lm		
Imax = 160					
C.I.E.	50 80 96 97 41	D DIN 5040	A31		
F UTE	0.40 E + 0.01 T	B NBN	BZ 4		


Diam=135mm



Semipiani C

180.0 ——— 0.0

ULOR 1.13 %  
DLOR 39.98 %  
RN 2.74 %

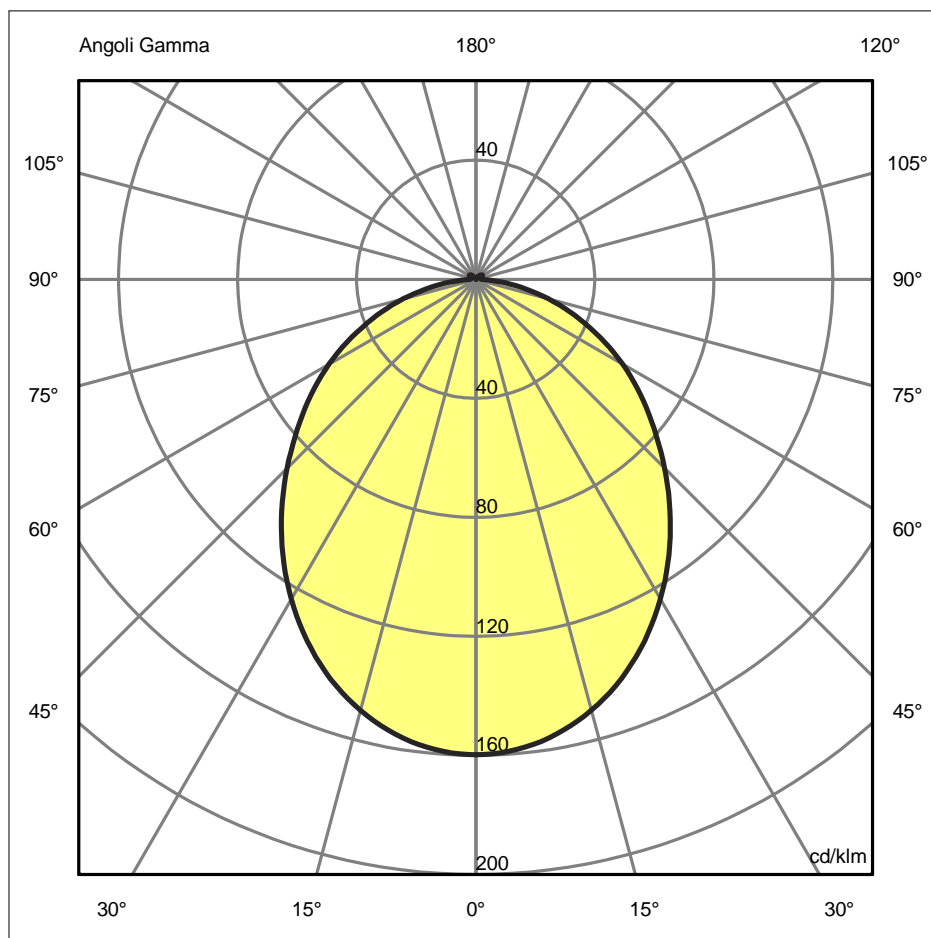

## Luminaire

Code 0941010A  
Name NULL VECTOR SOSPENSIONE ROSSO

## Measur.

Code FTS1400829  
Name NULL VECTOR SOSPENSIONE ROSSO


Efficiency	41.10%	Coordinate system	CG	Total Flux	470.00 lm
Maximum value	159.70 cd/klm	Position	C=0.00 G=0.00	Rotosymmetrical	
Round Luminaire Round Luminous Area	Diam. Diam.	135 mm 133 mm	Height Height	155 mm 0 mm	
Horizontal Luminous Area	0.013893 m2		Emitting area on Plane 180°	0.000000 m2	
Emitting area on Plane 0°	0.000000 m2		Emitting area on Plane 270°	0.000000 m2	
Emitting area on Plane 90°	0.000000 m2		Glare area at 76°	0.003361 m2	
Date	10-11-2014	Maximum Gamma Angle	180		
Measurement Distance	0.00	Measurement Flux	470.00 lm		
Imax = 160					
C.I.E.	50 80 96 97 41	D DIN 5040	A31		
F UTE	0.40 E + 0.01 T	B NBN	BZ 4		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.16	2.32	3.48	4.65	5.81	OC	1.16	2.32	3.48	4.65	5.81
OB	1.16	2.32	3.48	4.65	5.81	OD	1.16	2.32	3.48	4.65	5.81

### Luminous Intensities [ cd/klm]

	0	5	15	25	35	45	55	65	75	85
OA	75.06	74.52	70.46	63.02	53.13	42.15	31.75	21.59	11.84	3.37
OB	75.06	74.52	70.46	63.02	53.13	42.15	31.75	21.59	11.84	3.37
OC	75.06	74.52	70.46	63.02	53.13	42.15	31.75	21.59	11.84	3.37
OD	75.06	74.52	70.46	63.02	53.13	42.15	31.75	21.59	11.84	3.37

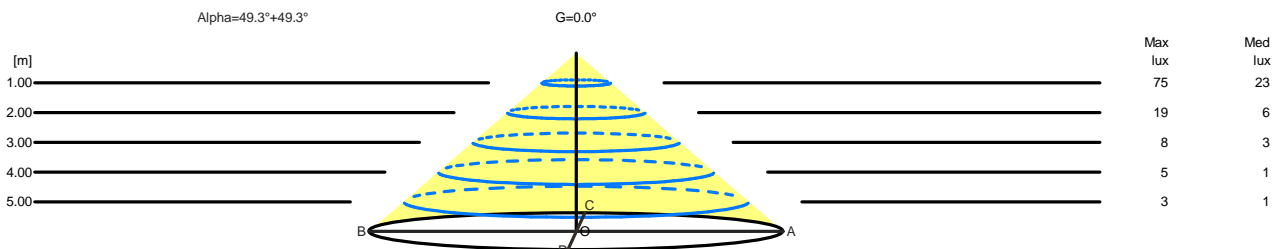

H[m]	D[m]	Max lux	Med lux	Alpha=49.3°+49.3°	G=0.0
1.00	2.32	75	23		
2.00	4.65	19	6		
3.00	6.97	8	3		
4.00	9.29	5	1		
5.00	11.62	3	1		