


Luminaire

Code T42104LW10
Name EFFETTO 16r 4 FASCI LARGHI 3000K ruggine


Measurerm.

Code FTS1501929
Name EFFETTO 16r 4 FASCI LARGHI 3000K ruggine

Luminaire Flux	205 lm	Luminaire Power	11.0 W	Efficacy	18.604 lm/W	Efficiency	100.00%
Source Flux	205 lm	Maximum value	707.51 cd/klm	Position	C=60.00 G=10.00	CG	Asymmetrical
Round Luminaire		Diam.	160 mm	Height	140 mm	Height	0 mm
Rectangular Luminous Area		Length	50 mm	Width	40 mm		
Horizontal Luminous Area		0.002000 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000484 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		26-11-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		205 lm	
3000K - I _{max} =725 cd/klm - LED Flux=908 lm - LED Power=8.4 W - Eff=22% - EfcLED=108 lm/W - EfcLum=18.6 lm/W Ra=80 min -SDCM=4- Life=L70(9K)>51400 ore							
C.I.E.	43 52 67 50 100			D DIN 5040	C31		
F UTE	0.50 G + 0.50 T			B NBN	BZ 5 / 0.8 / BZ 6 / 1.5 / BZ 7 / 2.5 / BZ 8 / 4 / BZ 9		

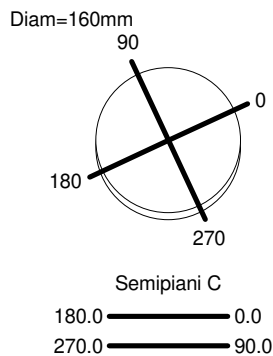

ULOR 50.01 %
DLOR 49.99 %
RN 50.01 %

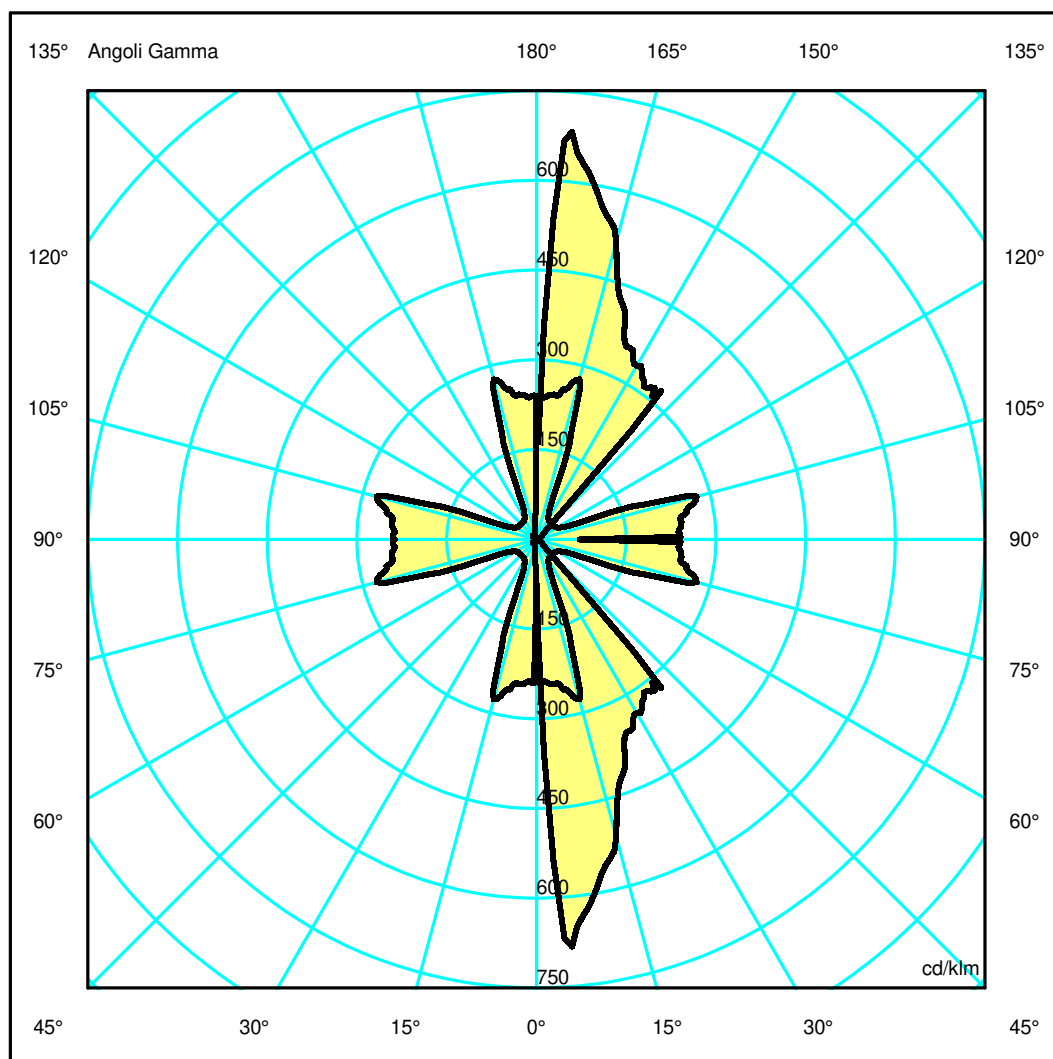

Luminaire

Code T42104LW10
Name EFFETTO 16r 4 FASCI LARGHI 3000K ruggine

Measurerm.


Code FTS1501929
Name EFFETTO 16r 4 FASCI LARGHI 3000K ruggine

Luminaire Flux	205 lm	Luminaire Power	11.0 W	Efficacy	18.604 lm/W	Efficiency	100.00%
Source Flux	205 lm	Maximum value	707.51 cd/klm	Position	C=60.00 G=10.00	CG	Asymmetrical
Round Luminaire		Diam.	160 mm	Height	140 mm	Height	0 mm
Rectangular Luminous Area		Length	50 mm	Width	40 mm		
Horizontal Luminous Area		0.002000 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000484 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		26-11-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		205 lm	
3000K - I _{max} =725 cd/klm - LED Flux=908 lm - LED Power=8.4 W - Eff=22% - EfcLED=108 lm/W - EfcLum=18.6 lm/W Ra=80 min -SDCM=4- Life=L70(9K)>51400 ore							
C.I.E.	43 52 67 50 100			D DIN 5040	C31		
F UTE	0.50 G + 0.50 T			B NBN	BZ 5 / 0.8 / BZ 6 / 1.5 / BZ 7 / 2.5 / BZ 8 / 4 / BZ 9		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.45	0.90	1.35	1.80	2.25	OC	0.35	0.70	1.05	1.40	1.75
OB	0.05	0.11	0.16	0.22	0.27	OD	0.35	0.70	1.05	1.40	1.75

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	15.85	139.87	105.49	72.75	63.94	4.80	2.12	1.38	0.75	0.10
OB	15.85	5.74	1.98	1.52	1.57	1.88	1.52	1.06	0.60	0.05
OC	15.85	49.63	56.71	10.10	7.62	7.43	7.62	10.10	56.71	49.63
OD	15.85	49.63	56.71	10.10	7.62	7.43	7.62	10.10	56.71	49.63

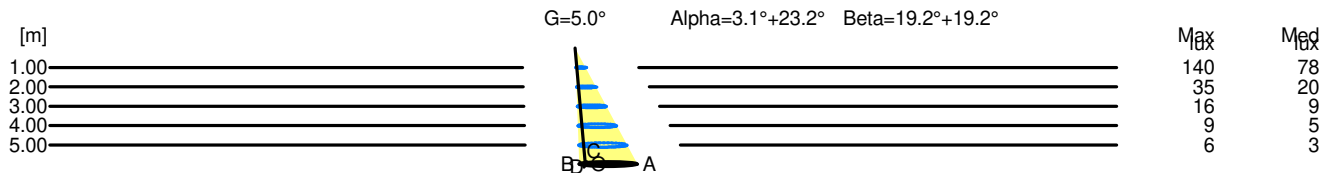

H[m]	D[m]	Max lux	Med lux	Alpha=3.1°+23.2°	G=5.0
1.00	0.50	140	78		
2.00	1.01	35	20		
3.00	1.51	16	9		
4.00	2.01	9	5		
5.00	2.52	6	3		

H[m]	D[m]	Max lux	Med lux	Beta=19.2°+19.2°	G=0.0
1.00	0.70	140	78		
2.00	1.40	35	20		
3.00	2.10	16	9		
4.00	2.80	9	5		
5.00	3.50	6	3		