

## Luminaire

Code T430325W00  
Name Spike 24 LED 3000K Flood

## Measurement

Code FTS1500862  
Name Spike 24 LED 3000K Flood

Luminaire Flux	3919 lm	Luminaire Power	48.0 W	Efficacy	81.641 lm/W	Efficiency	100.00%
Source Flux	3919 lm	Maximum value	2361.32 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	966 mm	Width	35 mm	Height	35 mm
Rectangular Luminous Area		Length	962 mm	Width	30 mm	Height	0 mm
Horizontal Luminous Area	0.028860 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.006982 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	17-01-2022			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	3919 lm		
LED Flux=4752lm LED Power=48W Eff=82% EfcLed=99lm/W EfcLum=82lm/W CCT=3000K Ra=80 R9=7 SDCM=3 L70(6K)=272160h							
C.I.E.	87 96 99 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		


966mm x 35mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
DLOR 100.00 %  
RN 0.00 %

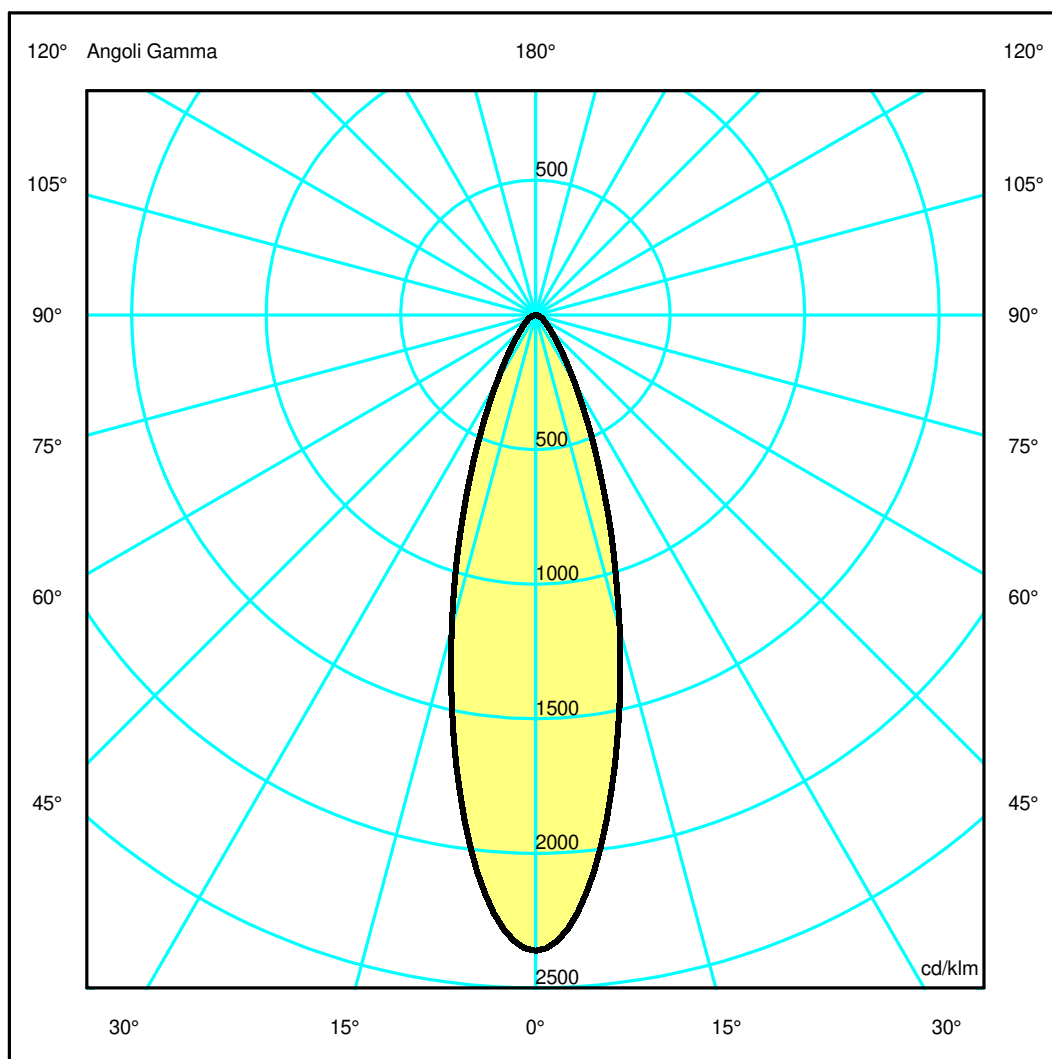

## Luminaire

Code T430325W00  
 Name Spike 24 LED 3000K Flood  
**Measur.**  
 Code FTS1500862  
 Name Spike 24 LED 3000K Flood

Luminaire Flux	3919 lm	Luminaire Power	48.0 W	Efficacy	81.641 lm/W	Efficiency	100.00%
Source Flux	3919 lm	Maximum value	2361.32 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Rectangular Luminaire		Length	966 mm	Width	35 mm	Height	35 mm
Rectangular Luminous Area		Length	962 mm	Width	30 mm	Height	0 mm
Horizontal Luminous Area	0.028860 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.006982 m2		
Coordinate system	CG	Symmetry Type		Maximum Gamma Angle	180	Measurement Distance	3919 lm
Date	17-01-2022	Measurement Flux					
Measurement Distance	0.00						


LED Flux=4752lm LED Power=48W Eff=82% EfcLed=99lm/W EfcLum=82lm/W CCT=3000K Ra=80 R9=7 SDCM=3 L70(6K)=272160h

C.I.E.	87 96 99 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.27	0.55	0.82	1.09	1.37	OC	0.27	0.55	0.82	1.09	1.37
OB	0.27	0.55	0.82	1.09	1.37	OD	0.27	0.55	0.82	1.09	1.37

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	9253.43	8451.80	4725.41	1891.67	687.50	300.17	167.12	99.63	44.63	7.53
OB	9253.43	8451.80	4725.41	1891.67	687.50	300.17	167.12	99.63	44.63	7.53
OC	9253.43	8451.80	4725.41	1891.67	687.50	300.17	167.12	99.63	44.63	7.53
OD	9253.43	8451.80	4725.41	1891.67	687.50	300.17	167.12	99.63	44.63	7.53

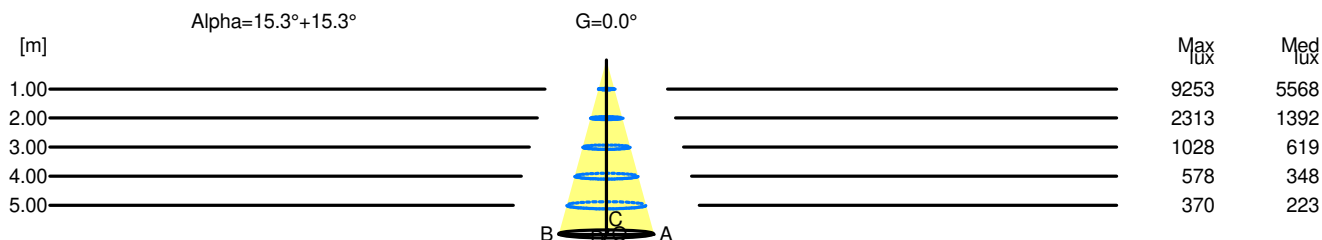

H[m]	D[m]	Max lux	Med lux	Alpha=15.3°+15.3°	G=0.0
1.00	0.55	9253	5568		
2.00	1.09	2313	1392		
3.00	1.64	1028	619		
4.00	2.19	578	348		
5.00	2.73	370	223		