

Luminaire

Code T418200W00
Name CEFISO PALO 40W 3000K grigio bianco

Measurerm.

Code FTS1502358-A
Name CEFISO PALO 40W 3000K grigio bianco


Luminaire Flux	3110 lm	Luminaire Power	41.0 W	Efficacy	75.865 lm/W	Efficiency	100.00%
Source Flux	3110 lm	Maximum value	420.04 cd/klm	Position	C=55.00 G=42.00	CG	Sym. on planes 270-90
Rectangular Luminaire		Length	332 mm	Width	195 mm	Height	142 mm
Rectangular Luminous Area		Length	170 mm	Width	170 mm	Height	0 mm
Horizontal Luminous Area	0.028900 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.006992 m2		
Coordinate system	CG Roads			Symmetry Type	Sym. on planes 270-90		
Date	21-02-2022			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	3110 lm		

LED Flux=4336lm LED Power=32W Eff=72% EfcLed=136lm/W EfcLum=76lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=272160h

C.I.E. 37 78 97 99 100

D DIN 5040

A21

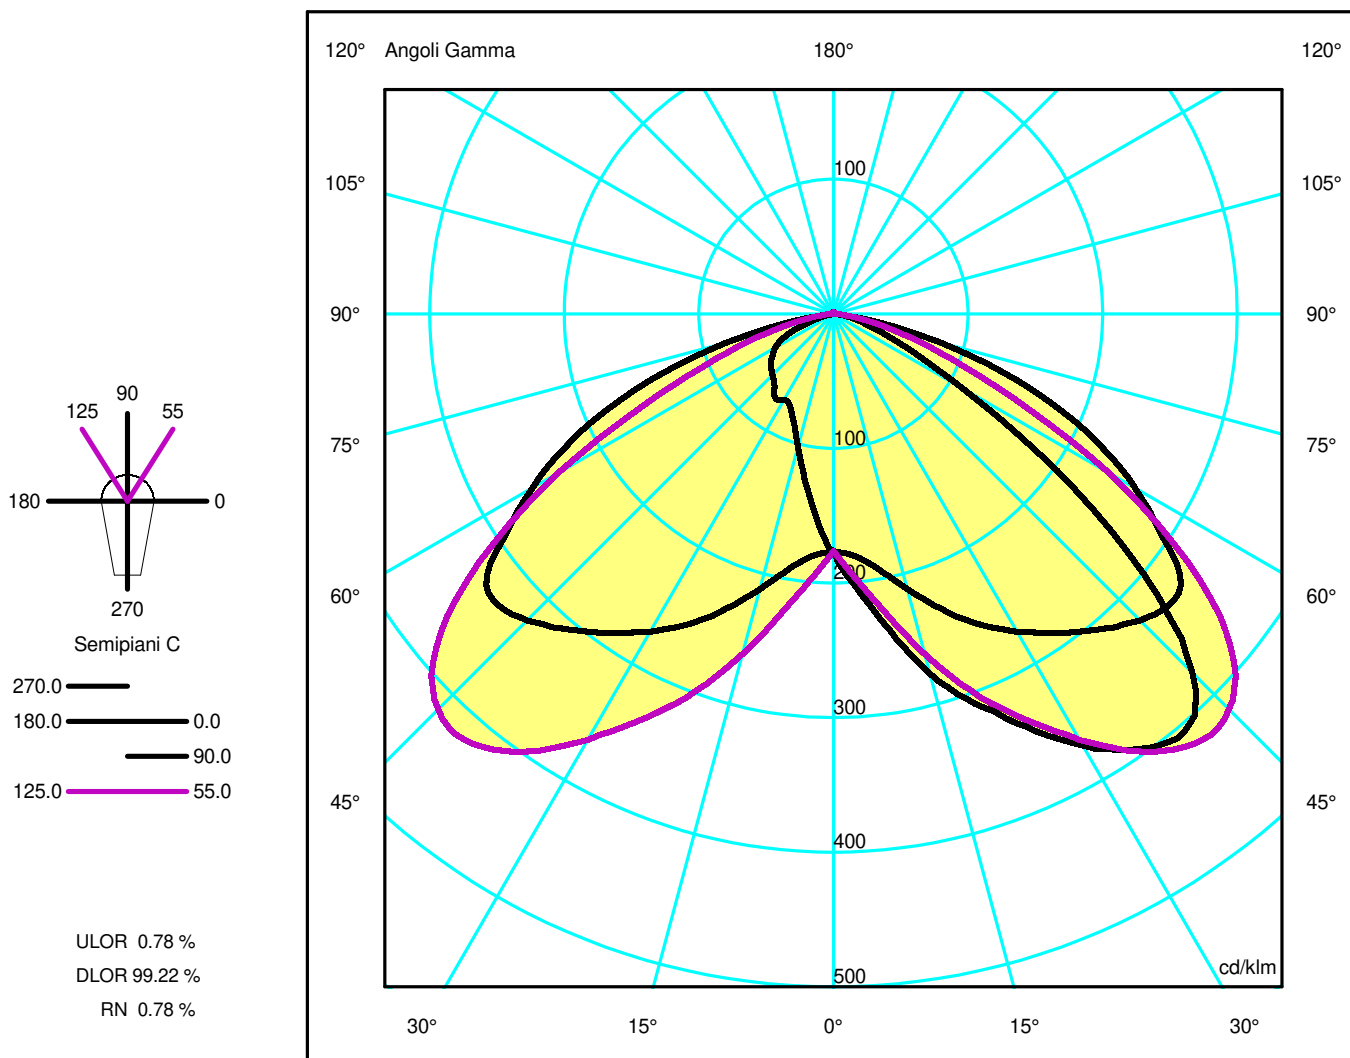

Luminaire

Code T418200W00
Name CEFISO PALO 40W 3000K grigio bianco

Measurement

Code FTS1502358-A
Name CEFISO PALO 40W 3000K grigio bianco

Luminaire Flux	3110 lm	Luminaire Power	41.0 W	Efficacy	75.865 lm/W	Efficiency	100.00%
Source Flux	3110 lm	Maximum value	420.04 cd/klm	Position	C=55.00 G=42.00	CG	Sym. on planes 270-90
Rectangular Luminaire		Length	332 mm	Width	195 mm	Height	142 mm
Rectangular Luminous Area		Length	170 mm	Width	170 mm	Height	0 mm
Horizontal Luminous Area	0.028900 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.006992 m2	
Coordinate system	CG Roads	Symmetry Type		Sym. on planes 270-90		180	
Date	21-02-2022	Maximum Gamma Angle		180			
Measurement Distance	0.00	Measurement Flux		3110 lm			


LED Flux=4336lm LED Power=32W Eff=72% EfcLed=136lm/W EfcLum=76lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=272160h

C.I.E.	37 78 97 99 100	D DIN 5040	A21
--------	-----------------	------------	-----

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	2.54	5.08	7.63	10.17	12.71	OC	1.53	3.06	4.59	6.11	7.64
OB	2.54	5.08	7.63	10.17	12.71	OD	0.05	0.09	0.14	0.18	0.23

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	547.70	561.60	658.68	790.44	900.23	1002.56	948.33	647.48	257.51	13.04
OB	547.70	561.60	658.68	790.44	900.23	1002.56	948.33	647.48	257.51	13.04
OC	547.70	638.18	860.34	1052.31	1227.11	1172.65	631.51	193.73	60.26	13.01
OD	547.70	468.97	318.26	237.17	235.76	199.79	173.67	124.15	35.25	3.48

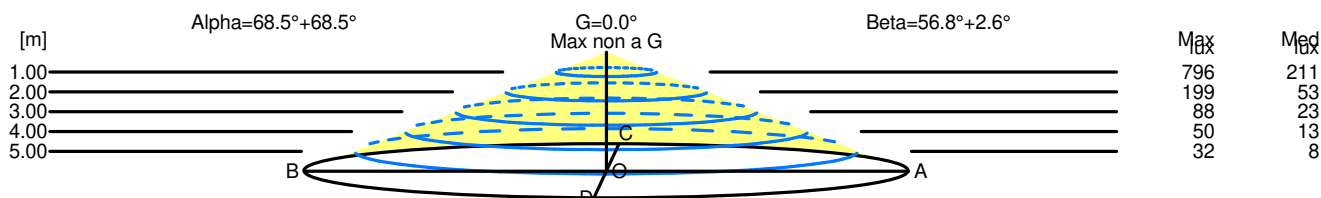

H[m]	D[m]	Max lux	Med lux	Alpha=68.5°+68.5°	G=0.0°	Max non a G
1.00	5.08	796	211			
2.00	10.17	199	53			
3.00	15.25	88	23			
4.00	20.33	50	13			
5.00	25.42	32	8			

H[m]	D[m]	Max lux	Med lux	Beta=2.6°+56.8°	G=0.0°	Max non a G
1.00	1.57	796	211			
2.00	3.15	199	53			
3.00	4.72	88	23			
4.00	6.29	50	13			
5.00	7.87	32	8			