

Luminaire

Code T086000+T086500
Name OBLIQUE LED WALL 20W 3000K ANTRACITE + PICCHETTO DI FISSAGGIO

Measurerm.

Code FTS1602857
Name OBLIQUE LED WALL 20W 3000K ANTRACITE + PICCHETTO DI FISSAGGIO


Luminaire Flux	1263 lm	Luminaire Power	23.0 W	Efficacy	54.912 lm/W	Efficiency	100.00%
Source Flux	1263 lm	Maximum value	1455.46 cd/klm	Position	C=90.00 G=110.00	CG	Asymmetrical
Round Luminaire		Diam.	100 mm	Height	180 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area			0.005027 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.001216 m2
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		01-12-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1263 lm	

LED Flux=2731lm LED Power=21W Eff=46% EfcLed=133lm/W EfcLum=55lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h


C.I.E. 0 6 23 10 100
F UTE --

D DIN 5040
B NBN

E13
BZ 10

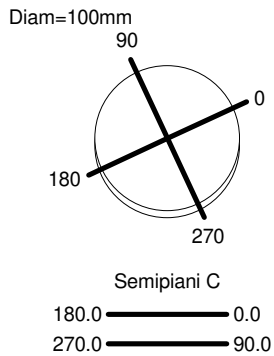

ULOR 89.93 %
DLOR 10.07 %
RN 89.93 %

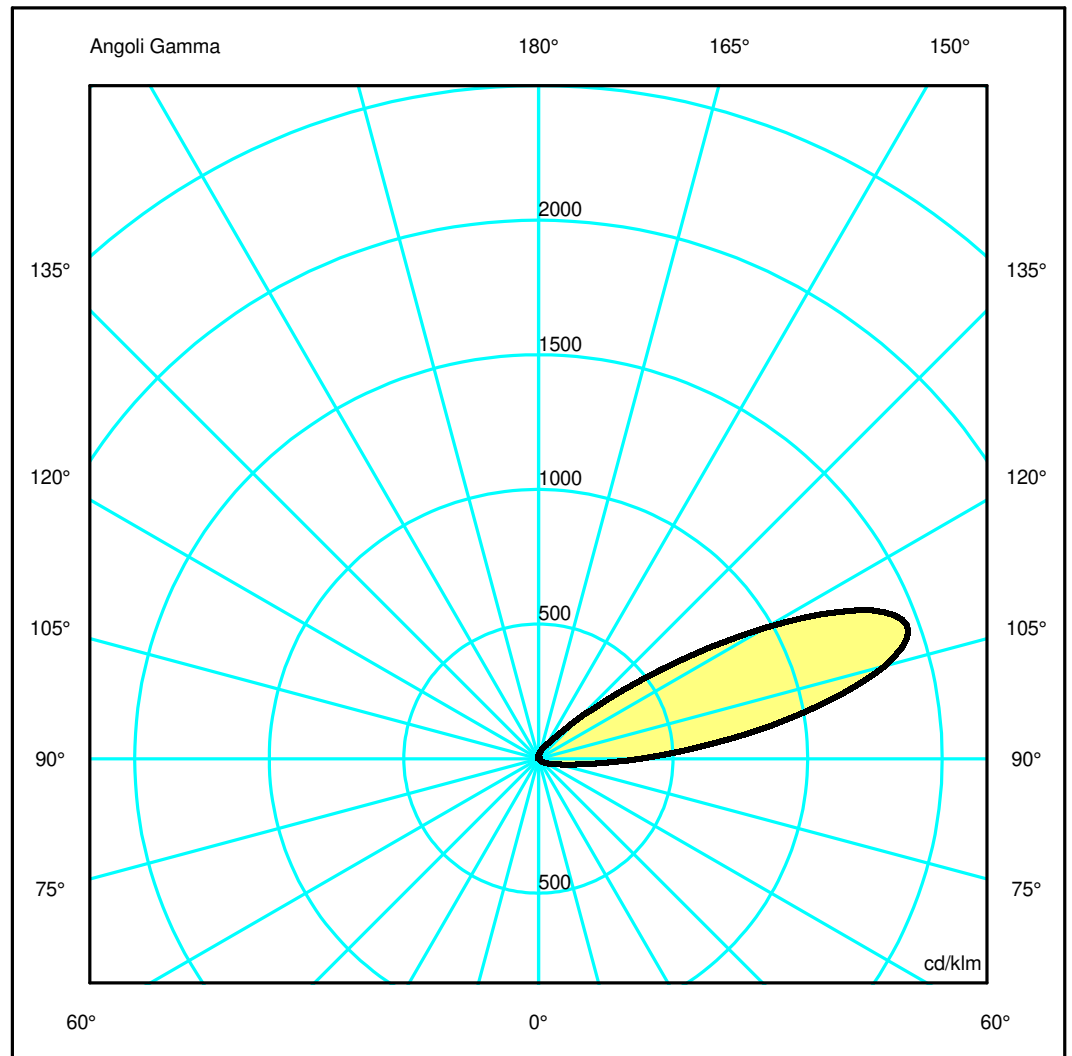

Luminaire

Code T086000+T086500
 Name OBLIQUE LED WALL 20W 3000K ANTRACITE + PICCHETTO DI FISSAGGIO

Measur.

Code FTS1602857
 Name OBLIQUE LED WALL 20W 3000K ANTRACITE + PICCHETTO DI FISSAGGIO

Luminaire Flux	1263 lm	Luminaire Power	23.0 W	Efficacy	54.912 lm/W	Efficiency	100.00%
Source Flux	1263 lm	Maximum value	1455.46 cd/klm	Position	C=90.00 G=110.00	CG	Asymmetrical
Round Luminaire		Diam.	100 mm	Height	180 mm		
Round Luminous Area		Diam.	80 mm	Height	0 mm		
Horizontal Luminous Area		0.005027 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.001216 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		01-12-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1263 lm	
LED Flux=2731lm LED Power=21W Eff=46% EfcLed=133lm/W EfcLum=55lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(6K)=50000h							
C.I.E.	0 6 23 10 100			D DIN 5040	E13		
F UTE	--			B NBN	BZ 10		

Could not find 90270 right beam angle•gamma0180=0

Could not find 90270 right beam angle•gamma0180=0

Could not find 90270 right beam angle•gamma0180=0