

## Luminaire

Code NL4203125K006  
 Name Everything 35 square 24° - cornice bianca - 3000K

## Measurerm.

Code FTS1500187-A  
 Name Everything 35 square 24° - cornice bianca - 3000K

Luminaire Flux	169 lm	Luminaire Power	1.4 W	Efficacy	120.714 lm/W	Efficiency	100.00%
Source Flux	169 lm	Maximum value	3235.65 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	34 mm	Height	48 mm		
Round Luminous Area		Diam.	22 mm	Height	0 mm		
Horizontal Luminous Area			0.000380 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.000092 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		14-11-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		169 lm	

LED Flux=200lm LED Power=1.4W Eff=84% EfcLed=143lm/W EfcLum=121lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 93 97 99 100 100  
 F UTE 1.00 A

D DIN 5040  
 B NBN  
 A60  
 BZ 1

Diam=34mm




Semipiani C

180.0 ——— 0.0

ULOR 0.01 %

DLOR 99.99 %

RN 0.01 %

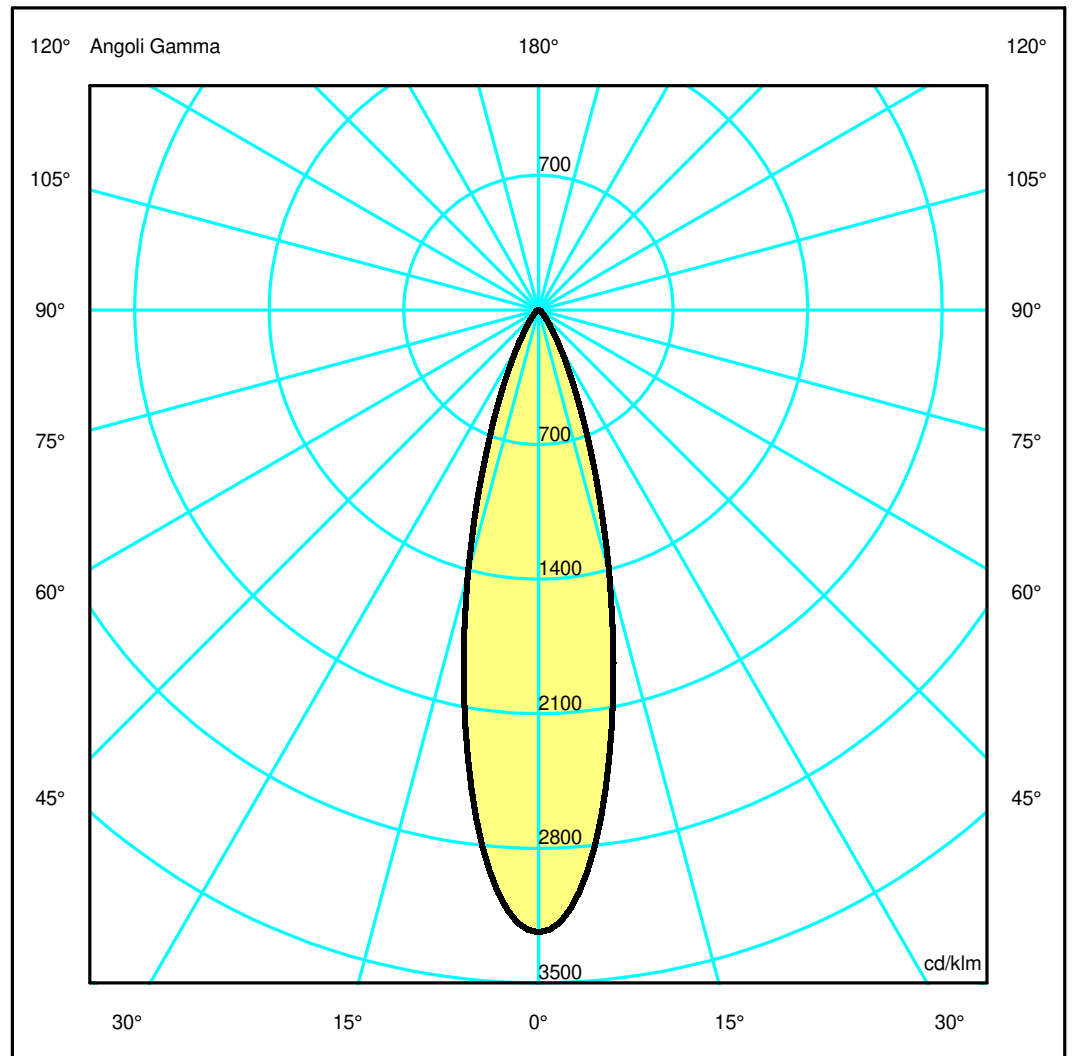

## Luminaire

Code NL4203125K006  
 Name Everything 35 square 24° - cornice bianca - 3000K

## Measurment.

Code FTS1500187-A  
 Name Everything 35 square 24° - cornice bianca - 3000K

Luminaire Flux	169 lm	Luminaire Power	1.4 W	Efficacy	120.714 lm/W	Efficiency	100.00%
Source Flux	169 lm	Maximum value	3235.65 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	34 mm	Height	48 mm		
Round Luminous Area		Diam.	22 mm	Height	0 mm		
Horizontal Luminous Area		0.000380 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000092 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		14-11-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		169 lm	


LED Flux=200lm LED Power=1.4W Eff=84% EfcLed=143lm/W EfcLum=121lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E.	93 97 99 100 100	D DIN 5040	A60
F UTE	1.00 A	B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.24	0.49	0.73	0.97	1.21	OC	0.24	0.49	0.73	0.97	1.21
OB	0.24	0.49	0.73	0.97	1.21	OD	0.24	0.49	0.73	0.97	1.21

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	546.83	494.78	239.86	72.55	19.31	6.60	3.67	2.34	1.37	0.52
OB	546.83	494.78	239.86	72.55	19.31	6.60	3.67	2.34	1.37	0.52
OC	546.83	494.78	239.86	72.55	19.31	6.60	3.67	2.34	1.37	0.52
OD	546.83	494.78	239.86	72.55	19.31	6.60	3.67	2.34	1.37	0.52

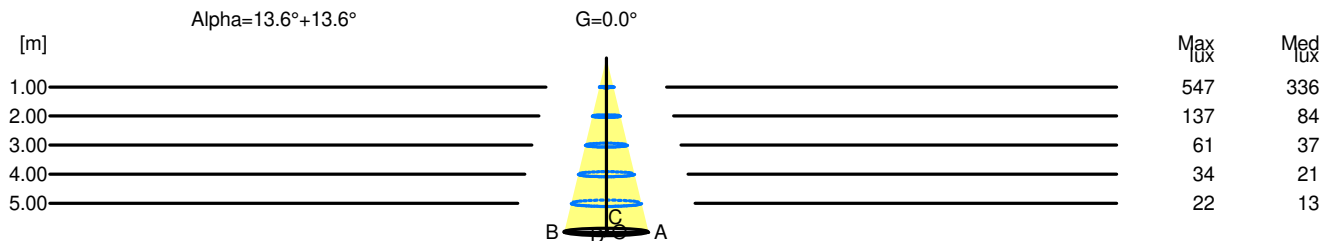

H[m]	D[m]	Max lux	Med lux	Alpha=13.6°+13.6°	G=0.0
1.00	0.49	547	336		
2.00	0.97	137	84		
3.00	1.46	61	37		
4.00	1.94	34	21		
5.00	2.43	22	13		