

## Luminaire

Code NL4203234K002  
 Name Everything 55 square adjustable 34° - cornice grigia - 3000K

## Measurerm.

Code FTS1500327  
 Name Everything 55 square adjustable 34° - cornice grigia - 3000K

|   |           |                 |                |                             |               |            |                 |
|---|-----------|-----------------|----------------|-----------------------------|---------------|------------|-----------------|
| Luminaire Flux  | 436.00 lm | Luminaire Power | 6.40 W         | Efficacy                    | 68.13 lm/W    | Efficiency | 100.00%         |
| Sources Flux  | 436.00 lm | Maximum value   | 2846.21 cd/klm | Position                    | C=0.00 G=0.00 | CG         | Rotosymmetrical |
| Round Luminaire   |           | Diam.           | 55 mm          | Height                      | 78 mm         |            |                 |
| Round Luminous Area   |           | Diam.           | 35 mm          | Height                      | 0 mm          |            |                 |
| Horizontal Luminous Area  |           |                 | 0.000962 m2    | Emitting area on Plane 180° |               |            | 0.000000 m2     |
| Emitting area on Plane 0°   |           |                 | 0.000000 m2    | Emitting area on Plane 270° |               |            | 0.000000 m2     |
| Emitting area on Plane 90°  |           |                 | 0.000000 m2    | Glare area at 76°           |               |            | 0.000233 m2     |
| Coordinate system   |           | CG              |                | Symmetry Type               |               |            | Rotosymmetrical |
| Date  |           | 17-02-2015      |                | Maximum Gamma Angle         |               |            | 90              |
| Measurement Distance  |           | 0.00            |                | Measurement Flux            |               |            | 436.00 lm       |
| 3000K - Imax=2846 cd/klm - LED Flux=566 lm - LED Power=6.4 W - Eff=77 % - EfcLED=89 lm/W - EfcLum=69 lm/W<br>Ra=80 min - SDCM=2 - Life=L70(6K)>51,400 ore |           |                 |                |                             |               |            |                 |
| C.I.E.  | 99        | 100             | 100            | 100                         | D DIN 5040    | A60        |                 |
| F UTE   | --        |                 |                |                             | B NBN         | BZ 1       |                 |

Diam=55mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

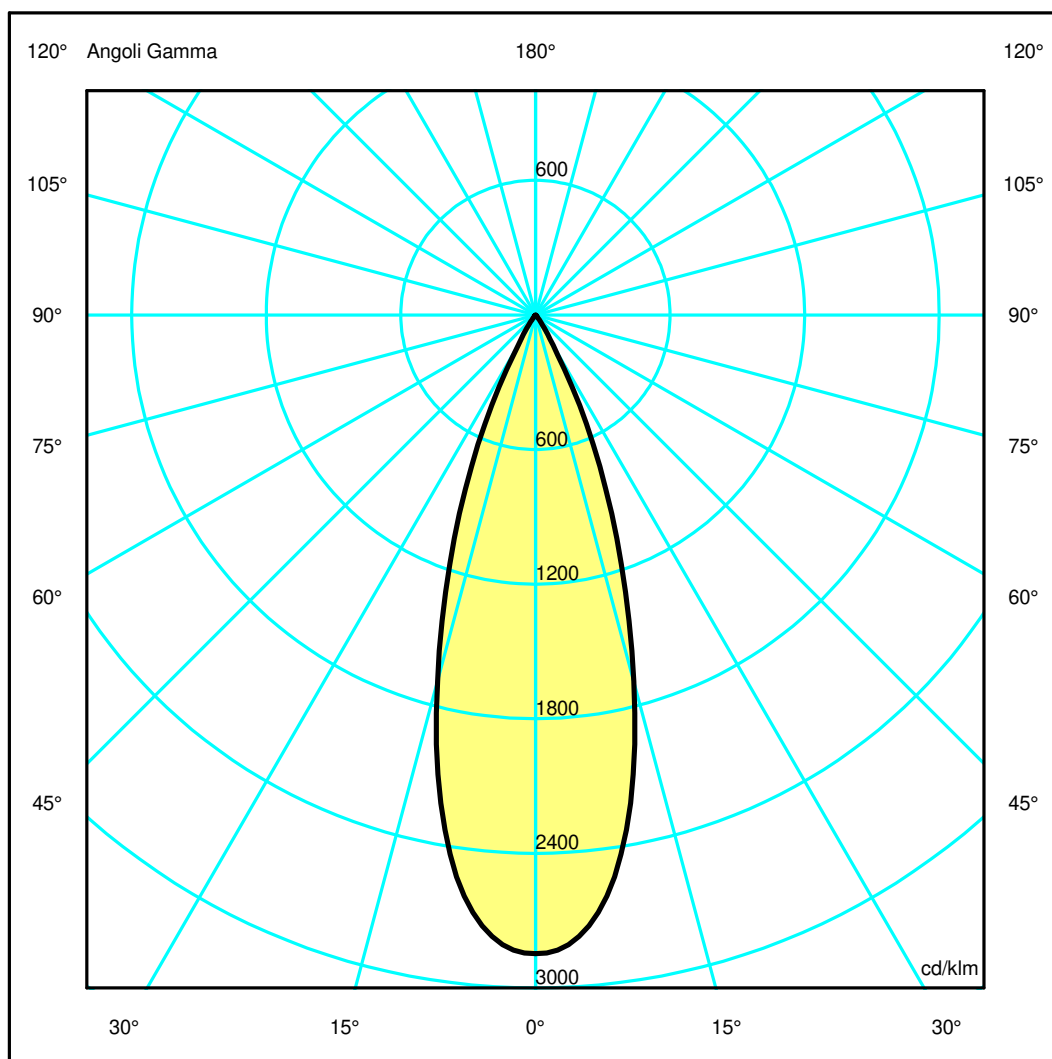

## Luminaire

Code NL4203234K002  
 Name Everything 55 square adjustable 34° - cornice grigia - 3000K

## Measur.


Code FTS1500327  
 Name Everything 55 square adjustable 34° - cornice grigia - 3000K

|   |           |                 |                |                             |               |                 |                 |
|---|-----------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux  | 436.00 lm | Luminaire Power | 6.40 W         | Efficacy                    | 68.13 lm/W    | Efficiency      | 100.00%         |
| Sources Flux  | 436.00 lm | Maximum value   | 2846.21 cd/klm | Position                    | C=0.00 G=0.00 | CG              | Rotosymmetrical |
| Round Luminaire   |           | Diam.           | 55 mm          | Height                      | 78 mm         |                 |                 |
| Round Luminous Area   |           | Diam.           | 35 mm          | Height                      | 0 mm          |                 |                 |
| Horizontal Luminous Area  |           | 0.000962 m2     |                | Emitting area on Plane 180° |               | 0.000000 m2     |                 |
| Emitting area on Plane 0°   |           | 0.000000 m2     |                | Emitting area on Plane 270° |               | 0.000000 m2     |                 |
| Emitting area on Plane 90°  |           | 0.000000 m2     |                | Glare area at 76°           |               | 0.000233 m2     |                 |
| Coordinate system   |           | CG              |                | Symmetry Type               |               | Rotosymmetrical |                 |
| Date  |           | 17-02-2015      |                | Maximum Gamma Angle         |               | 90              |                 |
| Measurement Distance  |           | 0.00            |                | Measurement Flux            |               | 436.00 lm       |                 |
| 3000K - Imax=2846 cd/klm - LED Flux=566 lm - LED Power=6.4 W - Eff=77 % - EfcLED=89 lm/W - EfcLum=69 lm/W<br>Ra=80 min - SDCM=2 - Life=L70(6K)>51,400 ore |           |                 |                |                             |               |                 |                 |
| C.I.E.  | 99        | 100             | 100            | 100                         | D DIN 5040    | A60             |                 |
| F UTE   | --        |                 |                |                             | B NBN         | BZ 1            |                 |

Width at 50.00 % of Max Intensity

|      |      |      |      |      |      |      |      |      |      |      |      |
|------|------|------|------|------|------|------|------|------|------|------|------|
| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
| OA   | 0.31 | 0.61 | 0.92 | 1.22 | 1.53 | OC   | 0.31 | 0.61 | 0.92 | 1.22 | 1.53 |
| OB   | 0.31 | 0.61 | 0.92 | 1.22 | 1.53 | OD   | 0.31 | 0.61 | 0.92 | 1.22 | 1.53 |

|    |                                 |         |        |        |       |      |      |      |      |      |
|----|---------------------------------|---------|--------|--------|-------|------|------|------|------|------|
|    | Luminous Intensities [ cd/klm ] |         |        |        |       |      |      |      |      |      |
|    | 0                               | 5       | 15     | 25     | 35    | 45   | 55   | 65   | 75   | 85   |
| OA | 1240.95                         | 1191.73 | 736.59 | 233.40 | 24.05 | 3.35 | 0.99 | 0.00 | 0.00 | 0.00 |
| OB | 1240.95                         | 1191.73 | 736.59 | 233.40 | 24.05 | 3.35 | 0.99 | 0.00 | 0.00 | 0.00 |
| OC | 1240.95                         | 1191.73 | 736.59 | 233.40 | 24.05 | 3.35 | 0.99 | 0.00 | 0.00 | 0.00 |
| OD | 1240.95                         | 1191.73 | 736.59 | 233.40 | 24.05 | 3.35 | 0.99 | 0.00 | 0.00 | 0.00 |

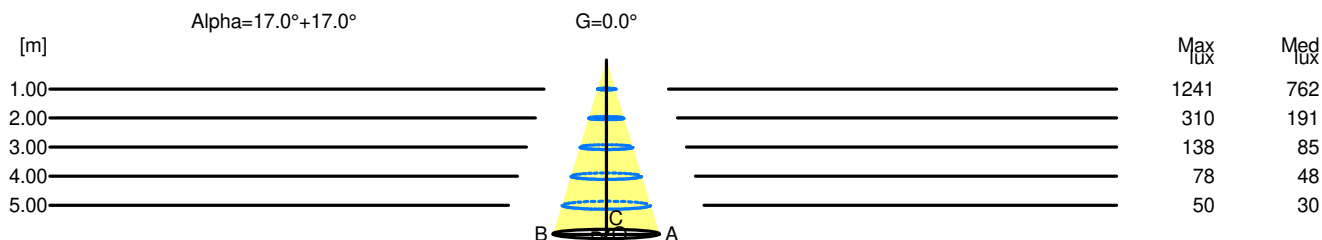

| H[m] | D[m] | Max lux | Med lux | Alpha=17.0°+17.0° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.61 | 1241    | 762     |                   |       |
| 2.00 | 1.22 | 310     | 191     |                   |       |
| 3.00 | 1.84 | 138     | 85      |                   |       |
| 4.00 | 2.45 | 78      | 48      |                   |       |
| 5.00 | 3.06 | 50      | 30      |                   |       |