

Luminaire

Code NL4204218K004
 Name Everything 55 700mA square20° - cornice nera - 3000K

Measurement

Code FTS1500349-B
 Name Everything 55 700mA square20° - cornice nera - 3000K

Luminaire Flux	734 lm	Luminaire Power	8.0 W	Efficacy	91.750 lm/W	Efficiency	100.00%
Source Flux	734 lm	Maximum value	8779.29 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	80 mm		
Round Luminous Area		Diam.	37 mm	Height	0 mm		
Horizontal Luminous Area		0.001075 m ²		Emitting area on Plane 180°		0.000000 m ²	
Emitting area on Plane 0°		0.000000 m ²		Emitting area on Plane 270°		0.000000 m ²	
Emitting area on Plane 90°		0.000000 m ²		Glare area at 76°		0.000260 m ²	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		734 lm	
LED Flux=920lm LED Power=8W Eff=80% EfcLed=115lm/W EfcLum=92lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(24k)=145000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

Diam=55mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

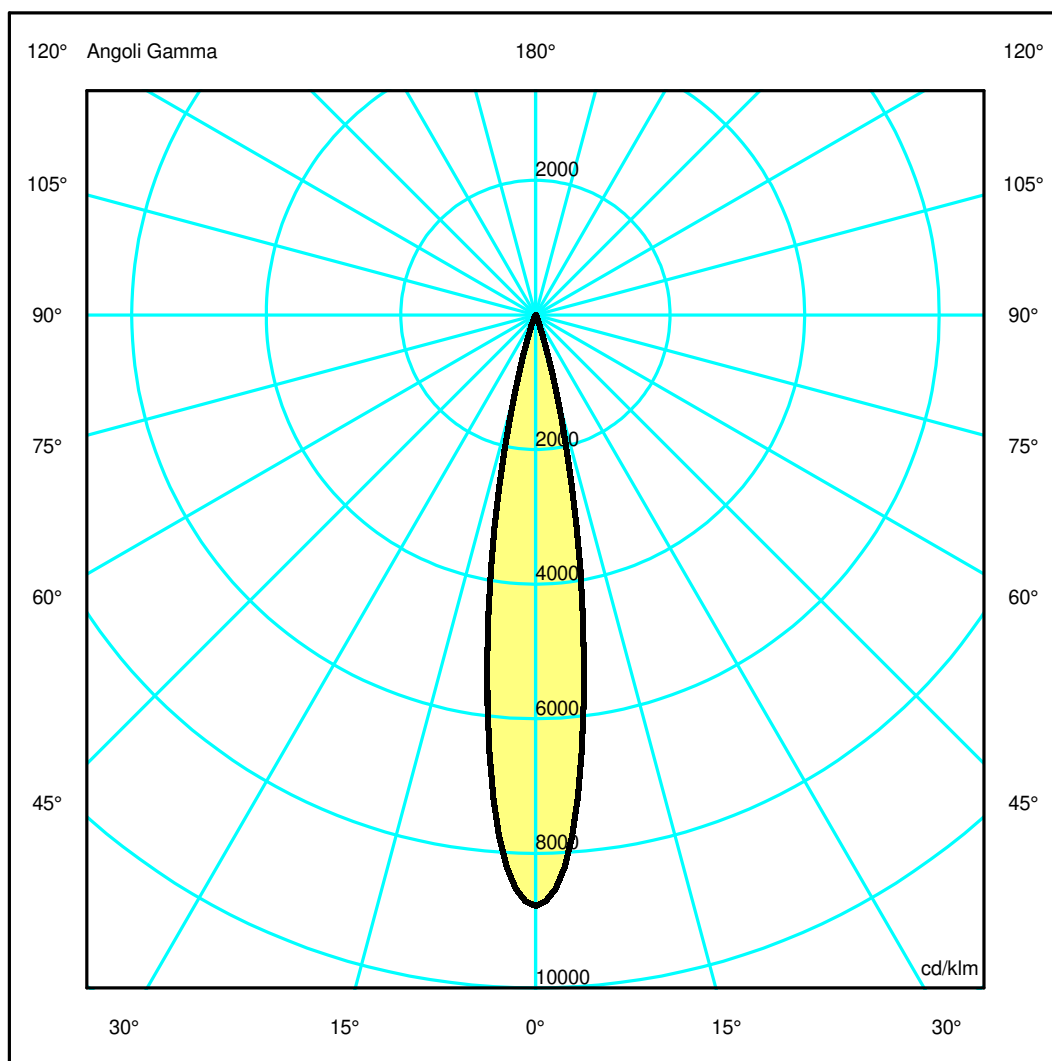

Luminaire

Code NL4204218K004
 Name Everything 55 700mA square20° - cornice nera - 3000K

Measurem.

Code FTS1500349-B
 Name Everything 55 700mA square20° - cornice nera - 3000K

Luminaire Flux	734 lm	Luminaire Power	8.0 W	Efficacy	91.750 lm/W	Efficiency	100.00%
Source Flux	734 lm	Maximum value	8779.29 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	80 mm		
Round Luminous Area		Diam.	37 mm	Height	0 mm		
Horizontal Luminous Area		0.001075 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000260 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		734 lm	


LED Flux=920lm LED Power=8W Eff=80% EfcLed=115lm/W EfcLum=92lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(24k)=145000h

C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.16	0.32	0.48	0.64	0.80	OC	0.16	0.32	0.48	0.64	0.80
OB	0.16	0.32	0.48	0.64	0.80	OD	0.16	0.32	0.48	0.64	0.80

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	6444.00	5283.27	870.46	53.03	11.37	5.05	2.82	0.39	0.25	0.21
OB	6444.00	5283.27	870.46	53.03	11.37	5.05	2.82	0.39	0.25	0.21
OC	6444.00	5283.27	870.46	53.03	11.37	5.05	2.82	0.39	0.25	0.21
OD	6444.00	5283.27	870.46	53.03	11.37	5.05	2.82	0.39	0.25	0.21

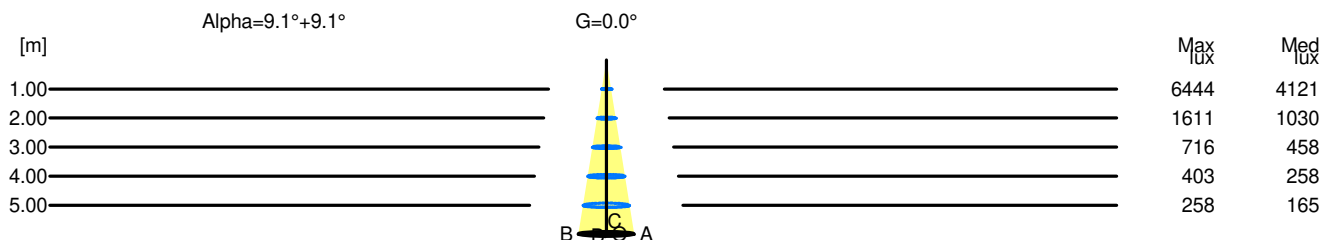

H[m]	D[m]	Max lux	Med lux	Alpha=9.1°+9.1°	G=0.0
1.00	0.32	6444	4121		
2.00	0.64	1611	1030		
3.00	0.96	716	458		
4.00	1.28	403	258		
5.00	1.60	258	165		