


Luminaire

Code M274405_30°
Name EVERY 80 SQ TS OR LED3000K 2X14° M_30°


Measurerm.

Code FTS2400184.
Name EVERY 80 SQ TS OR LED3000K 2X14° M_30°

Luminaire Flux	1091 lm	Luminaire Power	10.0 W	Efficacy	109.100 lm/W	Efficiency	100.00%
Source Flux	1091 lm	Maximum value	2313.63 cd/klm	Position	C=0.00 G=27.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	80 mm	Width	80 mm	Height	115 mm
Rectangular Luminous Area		Length	60 mm	Width	60 mm	Height	0 mm
Horizontal Luminous Area		0.003600 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000871 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		20-05-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1091 lm	
LED Flux=1556lm LED Power=10W Eff=70% EfcLed=156lm/W EfcLum=109lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	85 99 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

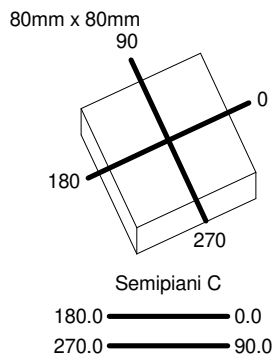

ULOR 0.03 %
DLOR 99.97 %
RN 0.03 %

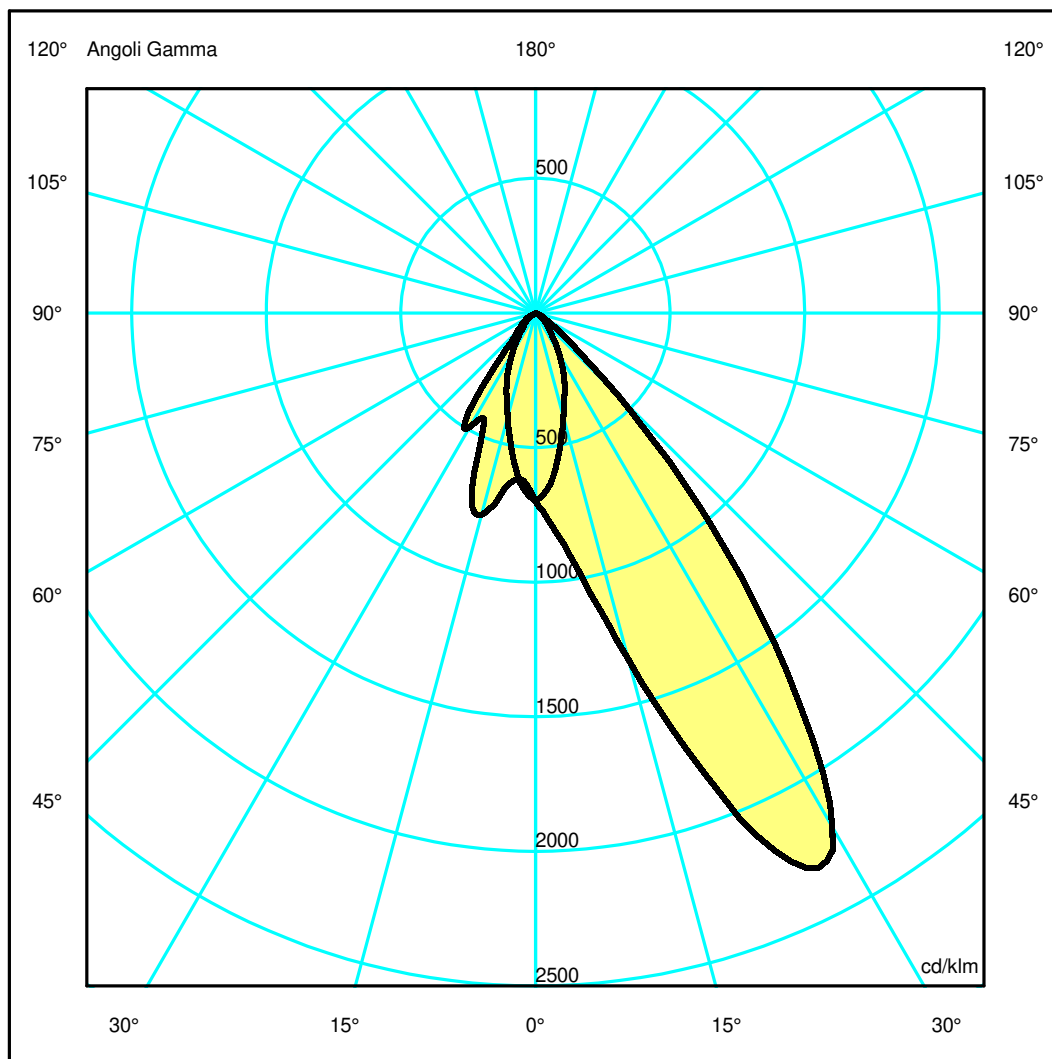

Luminaire

Code M274405_30°
Name EVERY 80 SQ TS OR LED3000K 2X14° M_30°

Measurem.

Code FTS2400184.
Name EVERY 80 SQ TS OR LED3000K 2X14° M_30°

Luminaire Flux	1091 lm	Luminaire Power	10.0 W	Efficacy	109.100 lm/W	Efficiency	100.00%
Source Flux	1091 lm	Maximum value	2313.63 cd/klm	Position	C=0.00 G=27.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	80 mm	Width	80 mm	Height	115 mm
Rectangular Luminous Area		Length	60 mm	Width	60 mm	Height	0 mm
Horizontal Luminous Area		0.003600 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000871 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		20-05-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1091 lm	

LED Flux=1556lm LED Power=10W Eff=70% EfcLed=156lm/W EfcLum=109lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h


C.I.E. 85 99 100 100 100
F UTE 1.00 A

D DIN 5040
B NBN
A60
BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.29	0.58	0.86	1.15	1.44	OC	0.33	0.66	0.98	1.31	1.64
OB	0.28	0.57	0.85	1.14	1.42	OD	0.33	0.66	0.98	1.31	1.64

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	763.48	881.63	1452.56	2453.35	1777.30	478.89	82.66	21.66	0.57	0.30
OB	763.48	676.94	845.47	498.02	425.67	104.27	51.37	0.00	0.00	0.00
OC	763.48	693.65	436.86	266.41	129.05	62.49	20.14	0.76	0.43	0.38
OD	763.48	693.65	436.86	266.41	129.05	62.49	20.14	0.76	0.43	0.38

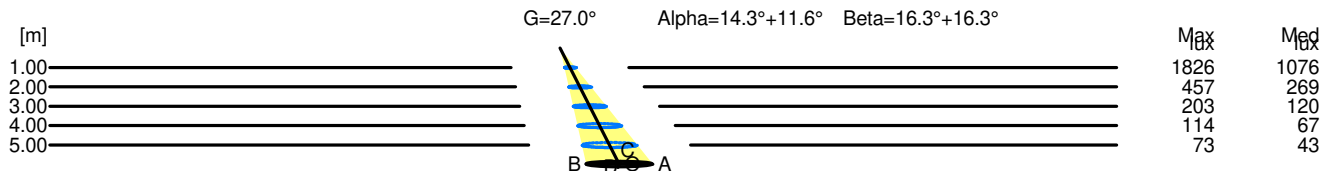

H[m]	D[m]	Max Lux	Med Lux	Alpha=14.3°+11.6°	G=27.0
1.00	0.57	1826	1076		
2.00	1.14	457	269		
3.00	1.72	203	120		
4.00	2.29	114	67		
5.00	2.86	73	43		

H[m]	D[m]	Max Lux	Med Lux	Beta=16.3°+16.3°	G=0.0
1.00	0.66	1826	1076		
2.00	1.31	457	269		
3.00	1.97	203	120		
4.00	2.62	114	67		
5.00	3.28	73	43		