


Luminaire

Code NL1907440Y006
Name Parabola 100 Adjustable 40° finitura bianca 2700K

Measurem.

Code FTS1601892
Name Parabola 100 Adjustable 40° finitura bianca 2700K

Luminaire Flux	1492.90 lm	Luminaire Power	17.00 W	Efficacy	87.82 lm/W	Efficiency	100.00%
Lamps Flux	1492.90 lm	Maximum value	1219.30 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 100 mm Diam. 75 mm	Height	100 mm	Height	100 mm 0 mm		
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.004418 m2 0.000000 m2 0.000000 m2	Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°			0.000000 m2 0.000000 m2 0.001069 m2		
Coordinate system	CG	Symmetry Type			Rotosymmetrical		
Date	12-12-2014	Maximum Gamma Angle			90		
Measurement Distance	0.00	Measurement Flux			1492.90 lm		
LED Flux=2012lm LED Power=17W Eff=74,2% EfcLed=118lm/W EfcLum=88lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	82 95 99 100 100	D DIN 5040			A60		
F UTE	1.00 B	B NBN			BZ 1		

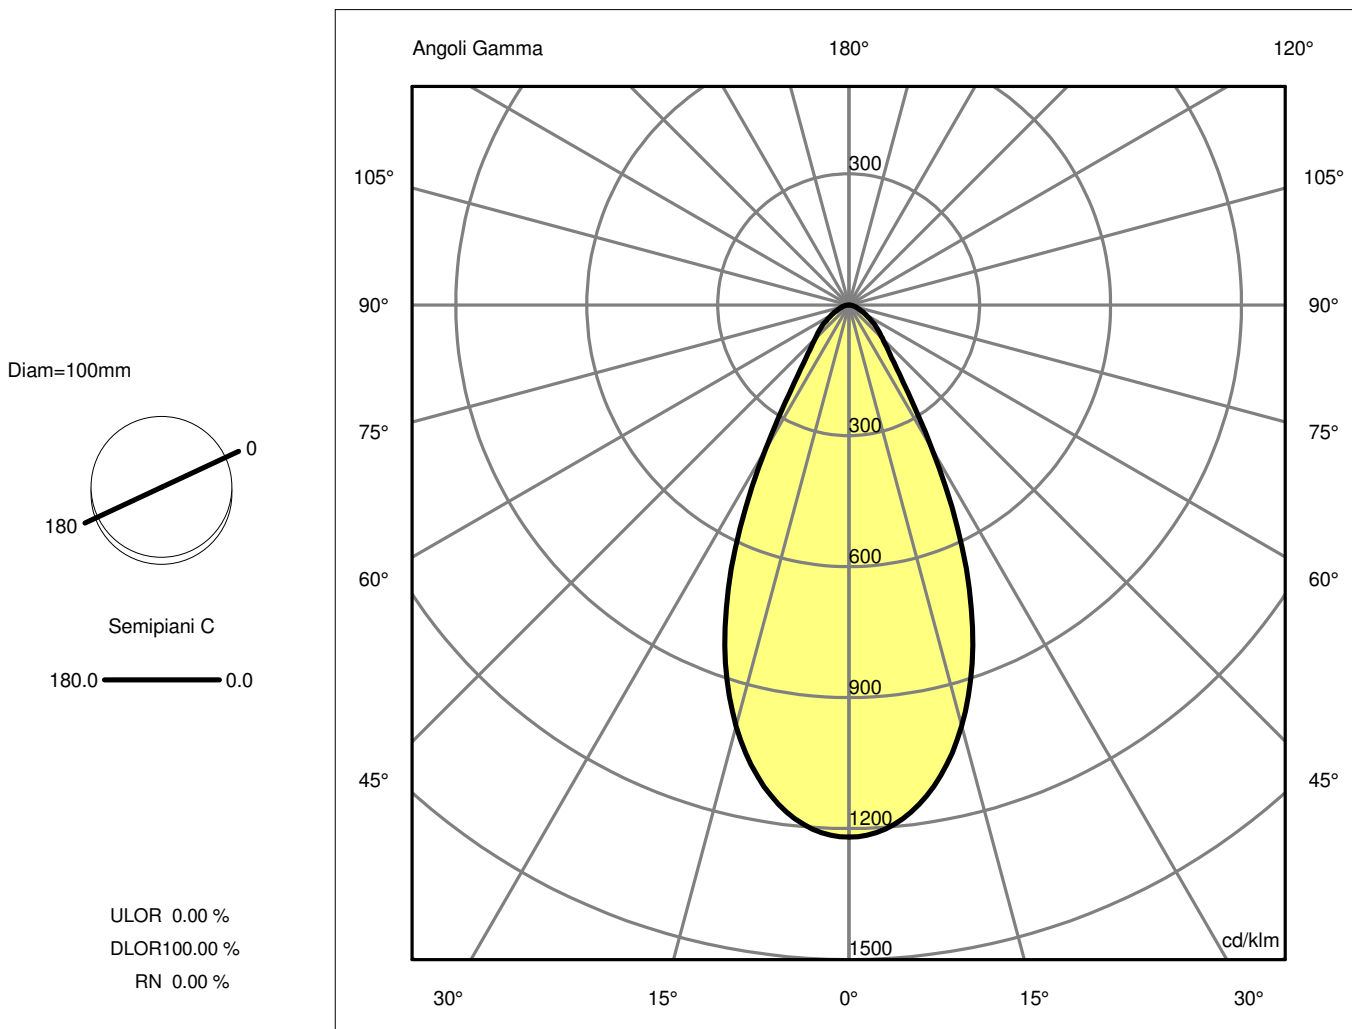

Luminaire

Code NL1907440Y006
Name Parabola 100 Adjustable 40° finitura bianca 2700K

Measurerm.


Code FTS1601892
Name Parabola 100 Adjustable 40° finitura bianca 2700K

Luminaire Flux	1492.90 lm	Luminaire Power	17.00 W	Efficacy	87.82 lm/W	Efficiency	100.00%
Lamps Flux	1492.90 lm	Maximum value	1219.30 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	100 mm	Height	100 mm		
Round Luminous Area		Diam.	75 mm	Height	0 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°		0.001069 m2	
Coordinate system	CG			Symmetry Type		Rotosymmetrical	
Date	12-12-2014			Maximum Gamma Angle		90	
Measurement Distance	0.00			Measurement Flux		1492.90 lm	
LED Flux=2012lm LED Power=17W Eff=74,2% EfcLed=118lm/W EfcLum=88lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	82 95 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.47	0.94	1.41	1.88	2.34	OC	0.47	0.94	1.41	1.88	2.34
OB	0.47	0.94	1.41	1.88	2.34	OD	0.47	0.94	1.41	1.88	2.34

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1820.29	1783.01	1491.10	919.00	325.33	162.44	93.70	46.93	21.84	0.00
OB	1820.29	1783.01	1491.10	919.00	325.33	162.44	93.70	46.93	21.84	0.00
OC	1820.29	1783.01	1491.10	919.00	325.33	162.44	93.70	46.93	21.84	0.00
OD	1820.29	1783.01	1491.10	919.00	325.33	162.44	93.70	46.93	21.84	0.00

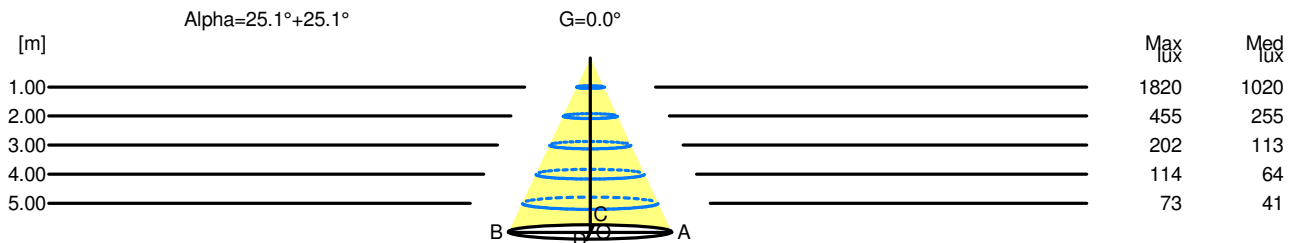

H[m]	D[m]	Max lux	Med lux	Alpha=25.1°+25.1°	G=0.0
1.00	0.94	1820	1020		
2.00	1.88	455	255		
3.00	2.81	202	113		
4.00	3.75	114	64		
5.00	4.69	73	41		

Luminaire

Code NL1907440Y006
 Name Parabola 100 Adjustable 40° finitura bianca 2700K

Measurement

Code FTS1601892
 Name Parabola 100 Adjustable 40° finitura bianca 2700K

Luminaire Flux	1492.90 lm	Luminaire Power	17.00 W	Efficacy	87.82 lm/W	Efficiency	100.00%
Lamps Flux	1492.90 lm	Maximum value	1219.30 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

UGR
 S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	22.2	23.1	22.5	23.3	23.5	22.2	23.1	22.5	23.3	23.5
x=2H y=3H	22.9	23.6	23.2	23.9	24.1	22.9	23.6	23.2	23.9	24.1
x=2H y=4H	23.1	23.9	23.4	24.1	24.4	23.1	23.9	23.4	24.1	24.4
x=2H y=6H	23.3	24.0	23.6	24.2	24.5	23.3	24.0	23.6	24.2	24.5
x=2H y=8H	23.3	23.9	23.6	24.2	24.5	23.3	23.9	23.6	24.2	24.5
x=2H y=12H	23.3	23.9	23.6	24.2	24.5	23.3	23.9	23.6	24.2	24.5
x=4H y=2H	22.6	23.3	22.9	23.5	23.8	22.6	23.3	22.9	23.5	23.8
x=4H y=3H	23.4	24.0	23.7	24.3	24.6	23.4	24.0	23.7	24.3	24.6
x=4H y=4H	23.7	24.3	24.1	24.6	24.9	23.7	24.3	24.1	24.6	24.9
x=4H y=6H	24.0	24.4	24.4	24.8	25.2	24.0	24.4	24.4	24.8	25.2
x=4H y=8H	24.0	24.4	24.4	24.8	25.2	24.0	24.4	24.4	24.8	25.2
x=4H y=12H	24.0	24.4	24.4	24.8	25.2	24.0	24.4	24.4	24.8	25.2
x=8H y=4H	23.9	24.3	24.3	24.7	25.1	23.9	24.3	24.3	24.7	25.1
x=8H y=6H	24.2	24.5	24.6	24.9	25.4	24.2	24.5	24.6	24.9	25.4
x=8H y=8H	24.2	24.5	24.7	25.0	25.4	24.2	24.5	24.7	25.0	25.4
x=8H y=12H	24.2	24.4	24.7	24.9	25.4	24.2	24.4	24.7	24.9	25.4
x=12H y=4H	23.9	24.2	24.3	24.6	25.0	23.9	24.2	24.3	24.6	25.0
x=12H y=6H	24.2	24.5	24.6	24.9	25.4	24.2	24.5	24.6	24.9	25.4
x=12H y=8H	24.3	24.5	24.7	25.0	25.4	24.3	24.5	24.7	25.0	25.4