


Luminaire

Code NL1907460K006
Name Parabola 100 Adjustable 60° finitura bianca 3000K

Measurem.

Code FTS1601909
Name Parabola 100 Adjustable 60° finitura bianca 3000K

Luminaire Flux	1533.09 lm	Luminaire Power	17.00 W	Efficacy	90.18 lm/W	Efficiency	100.00%
Lamps Flux	1533.09 lm	Maximum value	800.37 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire Round Luminous Area	Diam. 100 mm Diam. 75 mm	Height	100 mm	Height	100 mm 0 mm		
Horizontal Luminous Area	0.004418 m2	Emitting area on Plane 180°			0.000000 m2		
Emitting area on Plane 0°	0.000000 m2	Emitting area on Plane 270°			0.000000 m2		
Emitting area on Plane 90°	0.000000 m2	Glare area at 76°			0.001069 m2		
Coordinate system	CG	Symmetry Type			Rotosymmetrical		
Date	12-12-2014	Maximum Gamma Angle			90		
Measurement Distance	0.00	Measurement Flux			1533.09 lm		
LED Flux=2103lm LED Power=17W Eff=72,9% EfcLed=124lm/W EfcLum=90lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	75 94 99 100 100	D DIN 5040			A60		
F UTE	1.00 B	B NBN			BZ 1 / 4 / BZ 2		

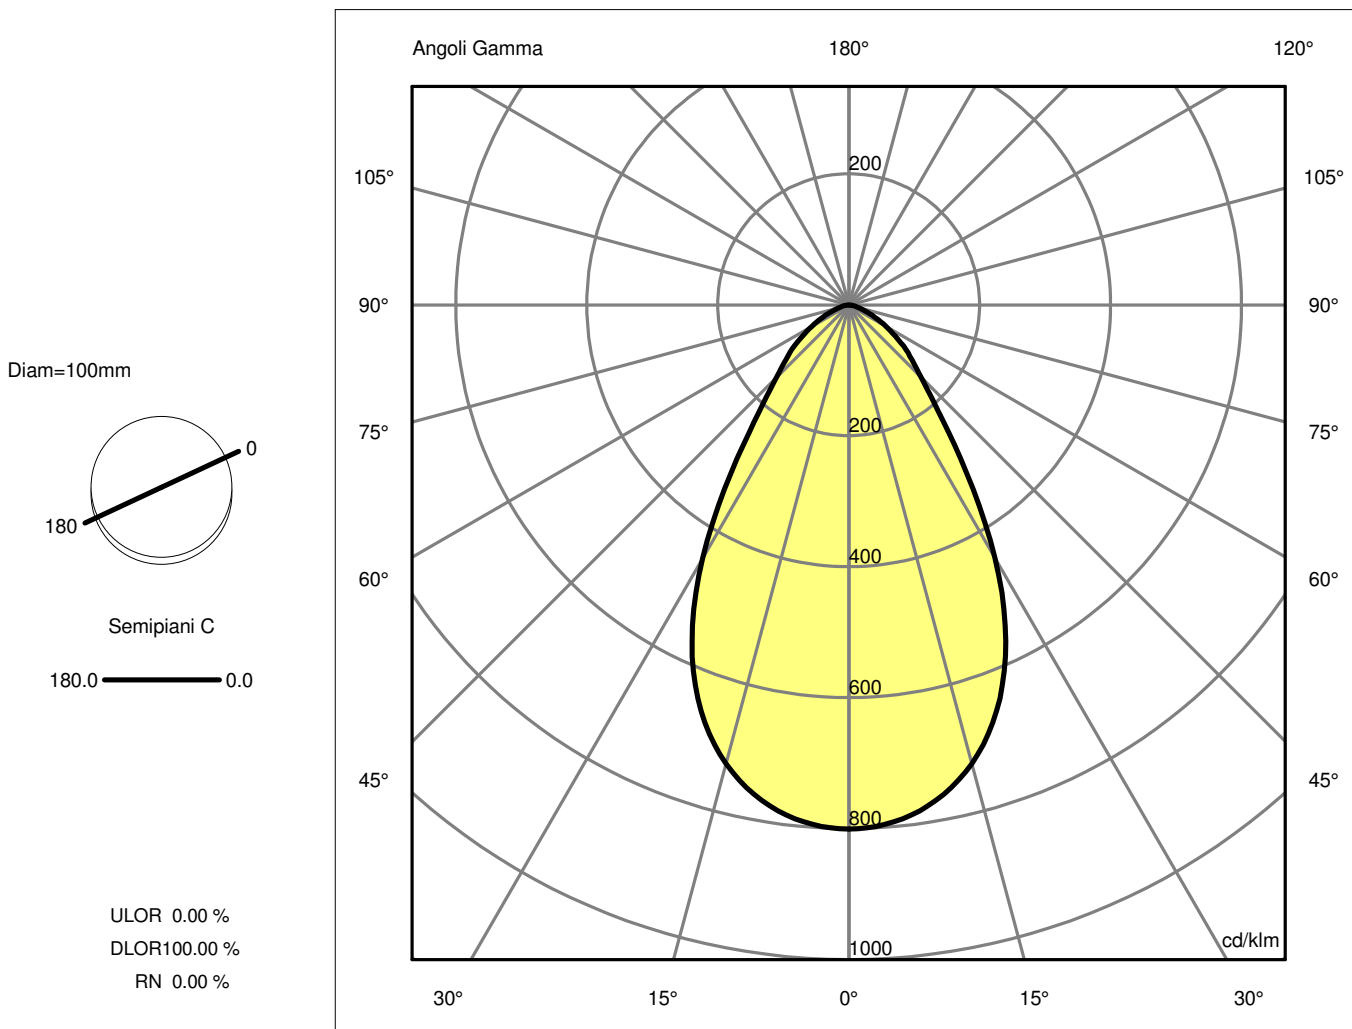

Luminaire

Code NL1907460K006
Name Parabola 100 Adjustable 60° finitura bianca 3000K

Measurerm.


Code FTS1601909
Name Parabola 100 Adjustable 60° finitura bianca 3000K

Luminaire Flux	1533.09 lm	Luminaire Power	17.00 W	Efficacy	90.18 lm/W	Efficiency	100.00%
Lamps Flux	1533.09 lm	Maximum value	800.37 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	100 mm	Height	100 mm		
Round Luminous Area		Diam.	75 mm	Height	0 mm		
Horizontal Luminous Area	0.004418 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.001069 m2		
Coordinate system	CG			Symmetry Type	Rotosymmetrical		
Date	12-12-2014			Maximum Gamma Angle	90		
Measurement Distance	0.00			Measurement Flux	1533.09 lm		
LED Flux=2103lm LED Power=17W Eff=72,9% EfcLed=124lm/W EfcLum=90lm/W Ra=90 SDCM=3 L70(6K)=60000h							
C.I.E.	75 94 99 100 100			D DIN 5040	A60		
F UTE	1.00 B			B NBN	BZ 1 / 4 / BZ 2		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.62	1.24	1.86	2.47	3.09	OC	0.62	1.24	1.86	2.47	3.09
OB	0.62	1.24	1.86	2.47	3.09	OD	0.62	1.24	1.86	2.47	3.09

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1227.04	1214.96	1111.99	869.17	481.77	239.21	140.71	65.98	21.76	4.33
OB	1227.04	1214.96	1111.99	869.17	481.77	239.21	140.71	65.98	21.76	4.33
OC	1227.04	1214.96	1111.99	869.17	481.77	239.21	140.71	65.98	21.76	4.33
OD	1227.04	1214.96	1111.99	869.17	481.77	239.21	140.71	65.98	21.76	4.33

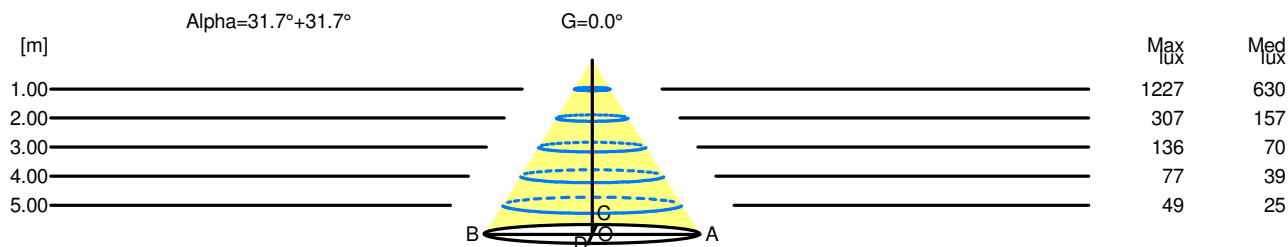

H[m]	D[m]	Max lux	Med lux	Alpha=31.7°+31.7°	G=0.0
1.00	1.24	1227	630		
2.00	2.47	307	157		
3.00	3.71	136	70		
4.00	4.95	77	39		
5.00	6.18	49	25		

Luminaire

Code NL1907460K006
 Name Parabola 100 Adjustable 60° finitura bianca 3000K

Measurement

Code FTS1601909
 Name Parabola 100 Adjustable 60° finitura bianca 3000K

Luminaire Flux	1533.09 lm	Luminaire Power	17.00 W	Efficacy	90.18 lm/W	Efficiency	100.00%
Lamps Flux	1533.09 lm	Maximum value	800.37 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical

UGR
 S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	24.8	25.7	25.0	25.9	26.1	24.8	25.7	25.0	25.9	26.1
x=2H y=3H	25.2	26.1	25.5	26.3	26.6	25.2	26.1	25.5	26.3	26.6
x=2H y=4H	25.4	26.2	25.7	26.4	26.7	25.4	26.2	25.7	26.4	26.7
x=2H y=6H	25.4	26.1	25.7	26.4	26.7	25.4	26.1	25.7	26.4	26.7
x=2H y=8H	25.4	26.1	25.7	26.4	26.7	25.4	26.1	25.7	26.4	26.7
x=2H y=12H	25.4	26.0	25.7	26.3	26.7	25.4	26.0	25.7	26.3	26.7
x=4H y=2H	25.1	25.9	25.4	26.1	26.4	25.1	25.9	25.4	26.1	26.4
x=4H y=3H	25.7	26.3	26.0	26.6	27.0	25.7	26.3	26.0	26.6	27.0
x=4H y=4H	25.8	26.4	26.2	26.7	27.1	25.8	26.4	26.2	26.7	27.1
x=4H y=6H	25.9	26.4	26.3	26.8	27.1	25.9	26.4	26.3	26.8	27.1
x=4H y=8H	25.9	26.4	26.3	26.7	27.1	25.9	26.4	26.3	26.7	27.1
x=4H y=12H	25.9	26.3	26.4	26.7	27.1	25.9	26.3	26.4	26.7	27.1
x=8H y=4H	25.9	26.3	26.3	26.7	27.1	25.9	26.3	26.3	26.7	27.1
x=8H y=6H	26.0	26.3	26.4	26.7	27.2	26.0	26.3	26.4	26.7	27.2
x=8H y=8H	26.0	26.3	26.5	26.7	27.2	26.0	26.3	26.5	26.7	27.2
x=8H y=12H	26.0	26.3	26.5	26.7	27.2	26.0	26.3	26.5	26.7	27.2
x=12H y=4H	25.8	26.2	26.3	26.6	27.1	25.8	26.2	26.3	26.6	27.1
x=12H y=6H	26.0	26.3	26.4	26.7	27.2	26.0	26.3	26.4	26.7	27.2
x=12H y=8H	26.0	26.2	26.5	26.7	27.2	26.0	26.2	26.5	26.7	27.2