

Luminaire

Code M250241
Name TAGORA 570 INCASSO LED DIMMERABILE DALI 3000K VERDE

Measurement

Code FTS2200123
Name TAGORA 570 INCASSO LED DIMMERABILE DALI 3000K VERDE

Luminaire Flux	3383 lm	Luminaire Power	54.0 W	Efficacy	62.641 lm/W	Efficiency	100.00%
Source Flux	3383 lm	Maximum value	420.43 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	570 mm	Height	195 mm		
Round Luminous Area		Diam.	475 mm	Height	0 mm		
Horizontal Luminous Area			0.177205 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.042870 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3383 lm	

LED Flux=8406lm LED Power=50W Eff=40% EfcLed=169lm/W EfcLum=63lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 55 88 99 100 100
F UTE 1.00 D

D DIN 5040 A40
B NBN BZ 3


Diam=570mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %
DLOR 100.00 %
RN 0.00 %

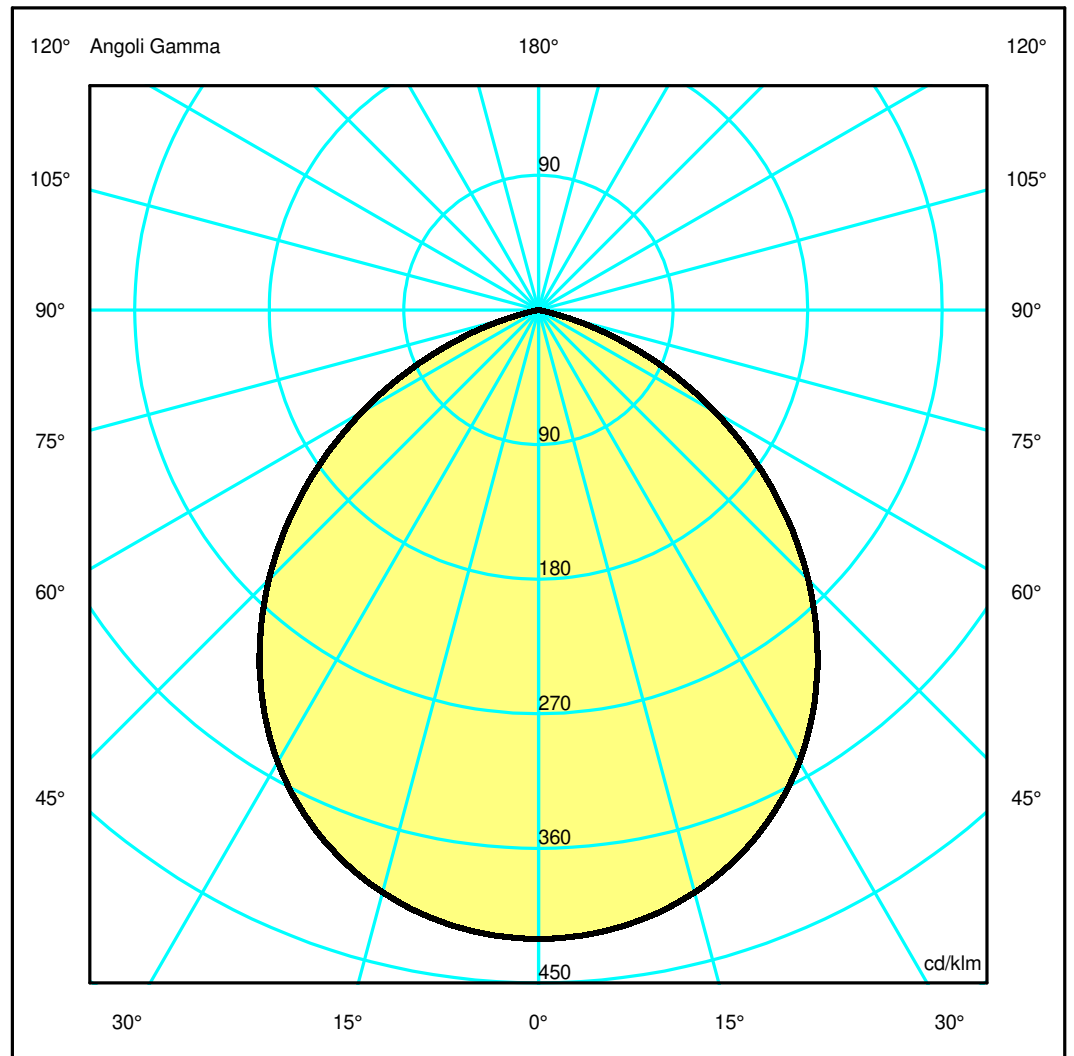

Luminaire

Code M250241
Name TAGORA 570 INCASSO LED DIMMERABILE DALI 3000K VERDE

Measurerm.

Code FTS2200123
Name TAGORA 570 INCASSO LED DIMMERABILE DALI 3000K VERDE

Luminaire Flux	3383 lm	Luminaire Power	54.0 W	Efficacy	62.641 lm/W	Efficiency	100.00%
Source Flux	3383 lm	Maximum value	420.43 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	570 mm	Height	195 mm		
Round Luminous Area		Diam.	475 mm	Height	0 mm		
Horizontal Luminous Area		0.177205 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.042870 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		02-03-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		3383 lm	


LED Flux=8406lm LED Power=50W Eff=40% EfcLed=169lm/W EfcLum=63lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E.	55 88 99 100 100	D DIN 5040	A40
F UTE	1.00 D	B NBN	BZ 3

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.23	2.46	3.69	4.92	6.15	OC	1.23	2.46	3.69	4.92	6.15
OB	1.23	2.46	3.69	4.92	6.15	OD	1.23	2.46	3.69	4.92	6.15

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1422.15	1415.53	1363.58	1256.30	1087.42	862.85	600.14	322.24	69.94	4.18
OB	1422.15	1415.53	1363.58	1256.30	1087.42	862.85	600.14	322.24	69.94	4.18
OC	1422.15	1415.53	1363.58	1256.30	1087.42	862.85	600.14	322.24	69.94	4.18
OD	1422.15	1415.53	1363.58	1256.30	1087.42	862.85	600.14	322.24	69.94	4.18

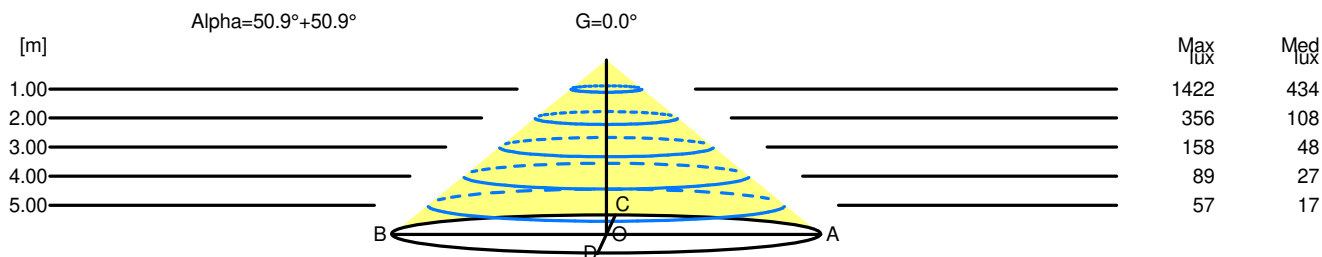

H[m]	D[m]	Max lux	Med lux	Alpha=50.9°+50.9°	G=0.0
1.00	2.46	1422	434		
2.00	4.92	356	108		
3.00	7.38	158	48		
4.00	9.84	89	27		
5.00	12.30	57	17		