

Luminaire

Code BD00001
Name SURF LED HV MODULO 1X 830 ND BCO

Measurem.

Code FTS1900811
Name SURF LED HV MODULO 1X 830 ND BCO


Luminaire Flux	6223.39 lm	Luminaire Power	53.00 W	Efficacy	117.42 lm/W	Efficiency	100.00%
Lamps Flux	6223.39 lm	Maximum value	392.90 cd/klm	Position	C=50.00 G=179.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1195 mm	Width	180 mm	Height	33 mm
Rectangular Luminous Area		Length	1165 mm	Width	175 mm	Height	0 mm
Horizontal Luminous Area		0.203875 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.049322 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		20-12-2018		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		6223.39 lm	

LED Flux=7455,84lm LED Power=48W Eff=83% EfcLed=155lm/W EfcLum=117lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h

C.I.E. 0 0 0 0 100
F UTE 1.00 T

D DIN 5040 --
B NBN BZ 10

1195mm x 180mm




Semipiani C

180.0 ——— 0.0
270.0 - - - - - 90.0

ULOR 99.90 %

DLOR 0.10 %

RN 99.90 %

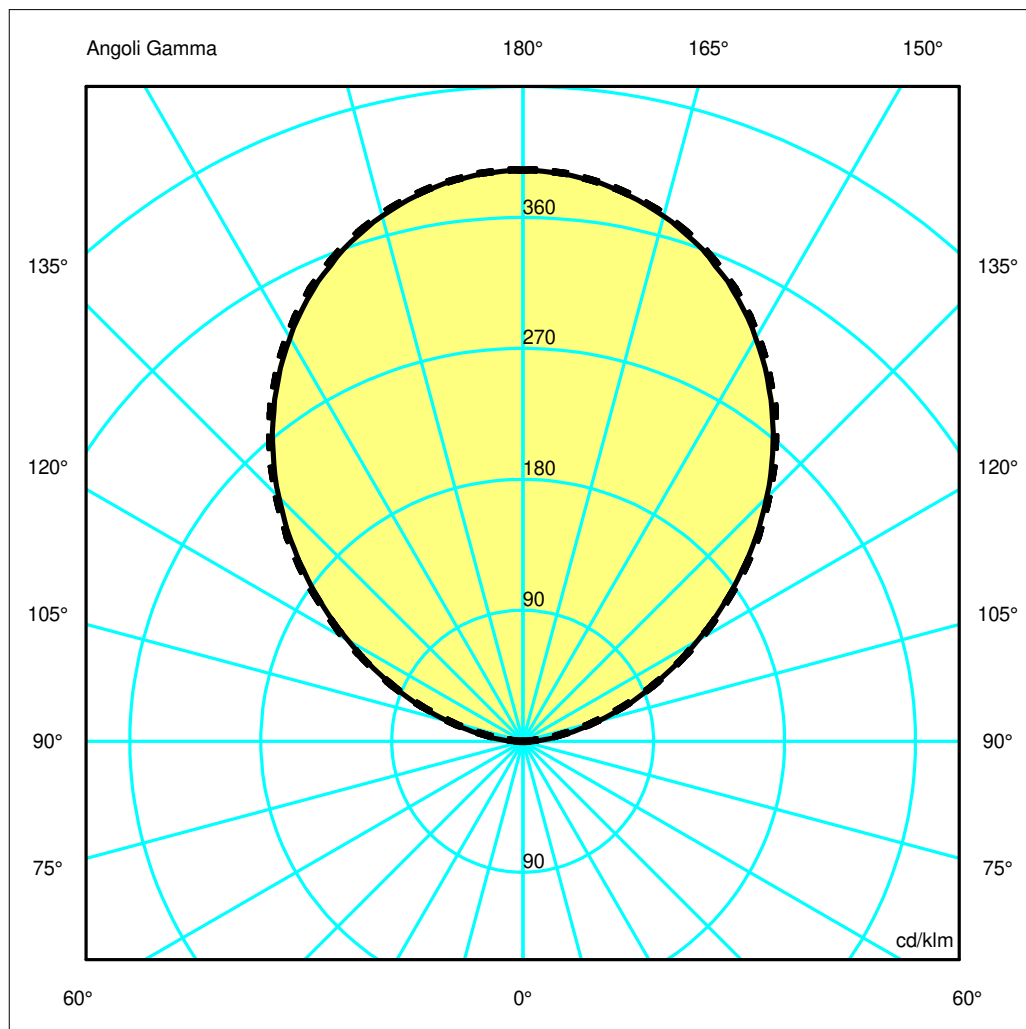

Luminaire

Code BD00001
Name SURF LED HV MODULO 1X 830 ND BCO

Measurerm.


Code FTS1900811
Name SURF LED HV MODULO 1X 830 ND BCO

Luminaire Flux	6223.39 lm	Luminaire Power	53.00 W	Efficacy	117.42 lm/W	Efficiency	100.00%
Lamps Flux	6223.39 lm	Maximum value	392.90 cd/klm	Position	C=50.00 G=179.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1195 mm	Width	180 mm	Height	33 mm
Rectangular Luminous Area		Length	1165 mm	Width	175 mm	Height	0 mm
Horizontal Luminous Area	0.203875 m2			Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°	0.049322 m2		
Coordinate system	CG			Symmetry Type	Double Symmetrical		
Date	20-12-2018			Maximum Gamma Angle	180		
Measurement Distance	0.00			Measurement Flux	6223.39 lm		
LED Flux=7455,84lm LED Power=48W Eff=83% EfcLed=155lm/W EfcLum=117lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	0 0 0 0 100			D DIN 5040	--		
F UTE	1.00 T			B NBN	BZ 10		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.25	2.50	3.75	5.00	6.25	OC	1.27	2.53	3.80	5.06	6.33
OB	1.25	2.50	3.75	5.00	6.25	OD	1.27	2.53	3.80	5.06	6.33

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	2442.51	2428.63	2325.96	2127.26	1837.23	1474.35	1066.79	670.21	329.27	96.41
OB	2442.51	2428.63	2325.96	2127.26	1837.23	1474.35	1066.79	670.21	329.27	96.41
OC	2442.51	2434.53	2333.71	2142.64	1853.76	1491.50	1082.77	674.80	318.25	59.05
OD	2442.51	2434.53	2333.71	2142.64	1853.76	1491.50	1082.77	674.80	318.25	59.05

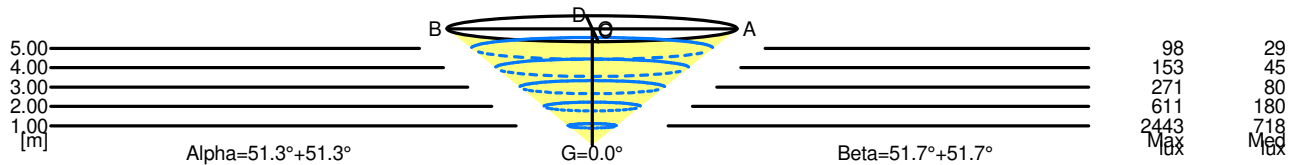

5.00	12.49	98	29	
4.00	9.99	153	45	
3.00	7.49	271	80	
2.00	5.00	611	180	
1.00	2.50	2443	718	
H[m]	D[m]	Max lux	Med lux	Alpha=51.3°+51.3° G=0.0

5.00	12.66	98	29	
4.00	10.13	153	45	
3.00	7.60	271	80	
2.00	5.06	611	180	
1.00	2.53	2443	718	
H[m]	D[m]	Max lux	Med lux	Beta=51.7°+51.7° G=0.0