

## Luminaire

Code T40015ELPTW00  
 Name EGO 220S FLAT WO Elliptic 3000K ACC

## Measurum.


Code FTS1501422-A  
 Name EGO 220S FLAT WO Elliptic 3000K ACC

Luminaire Flux	1227 lm	Luminaire Power	14.0 W	Efficacy	87.646 lm/W	Efficiency	100.00%
Source Flux	1227 lm	Maximum value	5077.13 cd/klm	Position	C=0.00 G=180.00	CG	Double Symmetrical
Rectangular Luminaire		Length	220 mm	Width	220 mm	Height	60 mm
Rectangular Luminous Area		Length	115 mm	Width	115 mm	Height	0 mm
Horizontal Luminous Area		0.013225 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003199 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		06-02-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1227 lm	


LED Flux=1827lm LED Power=14W Eff=67% EfcLed=131lm/W EfcLum=88lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=272160h

C.I.E. 59 74 87 0 100  
 F UTE 1.00 T

D DIN 5040 --  
 B NBN BZ 2 / 0.6 / BZ 3 / 1.25 / BZ 4 / 2 / BZ 5

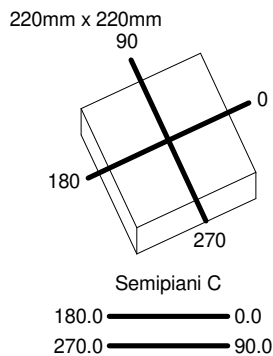

ULOR 99.58 %  
 DLOR 0.42 %  
 RN 99.58 %

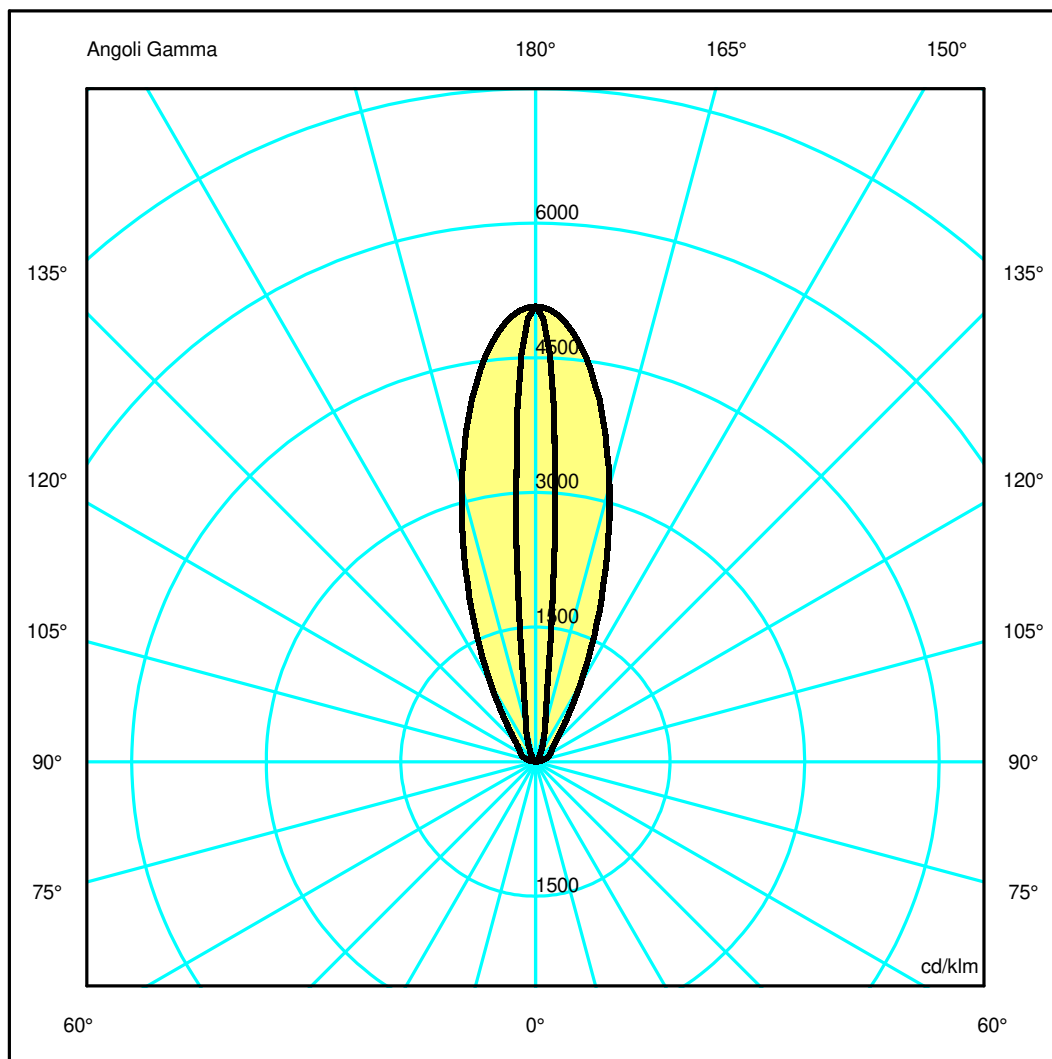

## Luminaire

Code T40015ELPTW00  
Name EGO 220S FLAT WO Elliptic 3000K ACC

## Measurment

Code FTS1501422-A  
Name EGO 220S FLAT WO Elliptic 3000K ACC

Luminaire Flux	1227 lm	Luminaire Power	14.0 W	Efficacy	87.646 lm/W	Efficiency	100.00%
Source Flux	1227 lm	Maximum value	5077.13 cd/klm	Position	C=0.00 G=180.00	CG	Double Symmetrical
Rectangular Luminaire		Length	220 mm	Width	220 mm	Height	60 mm
Rectangular Luminous Area		Length	115 mm	Width	115 mm	Height	0 mm
Horizontal Luminous Area		0.013225 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.003199 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		06-02-2023		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1227 lm	


LED Flux=1827lm LED Power=14W Eff=67% EfcLed=131lm/W EfcLum=88lm/W CCT=3000K Ra=80 SDCM=3 L70(6K)=272160h

C.I.E.	59 74 87 0 100	D DIN 5040	--
F UTE	1.00 T	B NBN	BZ 2 / 0.6 / BZ 3 / 1.25 / BZ 4 / 2 / BZ 5

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.33	0.67	1.00	1.34	1.67	OC	0.08	0.17	0.25	0.34	0.42
OB	0.33	0.67	1.00	1.34	1.67	OD	0.08	0.17	0.25	0.34	0.42

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	6229.84	5890.32	3908.37	1900.78	788.53	387.59	266.34	208.66	125.34	13.68
OB	6229.84	5890.32	3908.37	1900.78	788.53	387.59	266.34	208.66	125.34	13.68
OC	6229.84	2998.95	511.73	201.02	91.76	47.46	21.98	10.75	4.48	0.85
OD	6229.84	2998.95	511.73	201.02	91.76	47.46	21.98	10.75	4.48	0.85

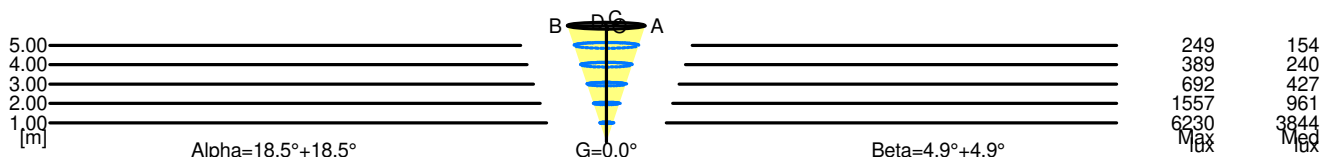

5.00	3.35	249	154	
4.00	2.68	389	240	
3.00	2.01	692	427	
2.00	1.34	1557	961	
1.00	0.67	6230	3844	
H[m]	D[m]	Max lux	Med lux	Alpha=18.5°+18.5°

5.00	0.85	249	154	
4.00	0.68	389	240	
3.00	0.51	692	427	
2.00	0.34	1557	961	
1.00	0.17	6230	3844	
H[m]	D[m]	Max lux	Med lux	Beta=4.9°+4.9°