


Luminaire

Code 1751020A
Name LA PETITE tavolo bianco


Measurement

Code FTS1503246
Name LA PETITE tavolo bianco

| | | | | | | | |
|---|-----------------|-----------------|---------------|-----------------------------|---------------|--------------|--------------|
| Luminaire Flux | 307 lm | Luminaire Power | 5.0 W | Efficacy | 61.376 lm/W | Efficiency | 65.29% |
| Source Flux | 470 lm | Maximum value | 206.42 cd/klm | Position | C=0.00 G=0.00 | CG | Asymmetrical |
| Round Luminaire | | Diam. | 190 mm | Height | 367 mm | | |
| Round Luminous Area | | Diam. | 188 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | | 0.027759 m2 | Emitting area on Plane 180° | | | 0.000000 m2 |
| Emitting area on Plane 0° | | | 0.000000 m2 | Emitting area on Plane 270° | | | 0.000000 m2 |
| Emitting area on Plane 90° | | | 0.000000 m2 | Glare area at 76° | | | 0.006716 m2 |
| Coordinate system | | CG | | Symmetry Type | | Asymmetrical | |
| Date | | 17-12-2021 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 470 lm | |
| Lamping=LED 1x5W (E14) CCT=2700K CRI=80 | | | | | | | |
| C.I.E. | 48 79 96 85 65 | | | D DIN 5040 | B31 | | |
| F UTE | 0.56 E + 0.10 T | | | B NBN | BZ 4 | | |

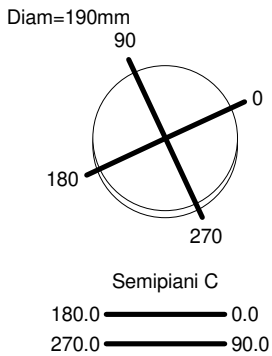

ULOR 9.63 %
DLOR 55.67 %
RN 14.74 %

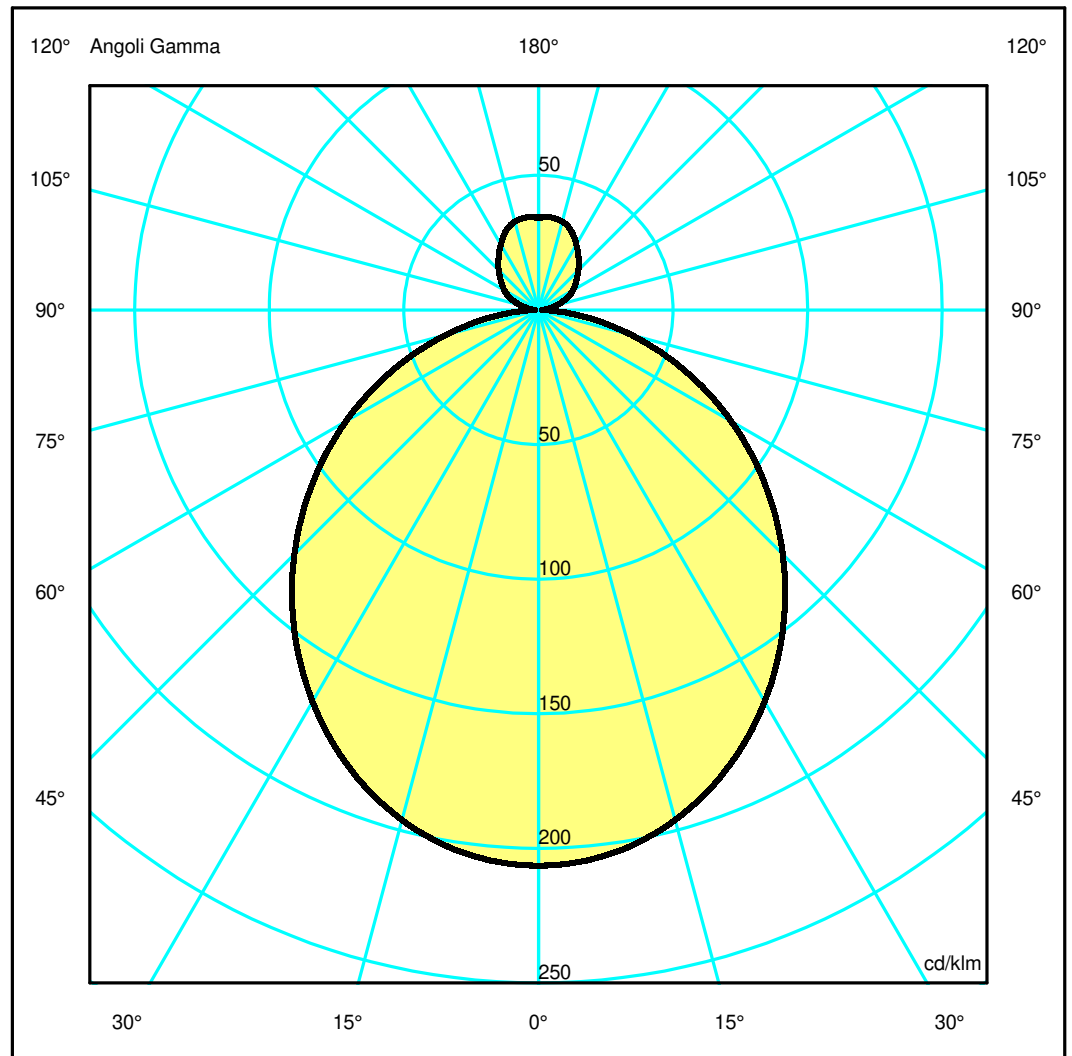

Luminaire

Code 1751020A
Name LA PETITE tavolo bianco

Measurerm.


Code FTS1503246
Name LA PETITE tavolo bianco

| | | | | | | | |
|---|-----------------|-----------------|---------------|-----------------------------|---------------|--------------|--------------|
| Luminaire Flux | 307 lm | Luminaire Power | 5.0 W | Efficacy | 61.376 lm/W | Efficiency | 65.29% |
| Source Flux | 470 lm | Maximum value | 206.42 cd/klm | Position | C=0.00 G=0.00 | CG | Asymmetrical |
| Round Luminaire | | Diam. | 190 mm | Height | 367 mm | | |
| Round Luminous Area | | Diam. | 188 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | | 0.027759 m2 | Emitting area on Plane 180° | | | 0.000000 m2 |
| Emitting area on Plane 0° | | | 0.000000 m2 | Emitting area on Plane 270° | | | 0.000000 m2 |
| Emitting area on Plane 90° | | | 0.000000 m2 | Glare area at 76° | | | 0.006716 m2 |
| Coordinate system | | CG | | Symmetry Type | | Asymmetrical | |
| Date | | 17-12-2021 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 470 lm | |
| Lamping=LED 1x5W (E14) CCT=2700K CRI=80 | | | | | | | |
| C.I.E. | 48 79 96 85 65 | | | D DIN 5040 | B31 | | |
| F UTE | 0.56 E + 0.10 T | | | B NBN | BZ 4 | | |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 1.35 | 2.69 | 4.04 | 5.39 | 6.73 | OC | 1.35 | 2.69 | 4.04 | 5.39 | 6.73 |
| OB | 1.35 | 2.69 | 4.04 | 5.39 | 6.73 | OD | 1.35 | 2.69 | 4.04 | 5.39 | 6.73 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 97.02 | 96.47 | 92.17 | 84.12 | 73.20 | 60.30 | 46.19 | 31.42 | 16.81 | 4.59 |
| OB | 97.02 | 96.47 | 92.17 | 84.12 | 73.20 | 60.30 | 46.19 | 31.42 | 16.81 | 4.59 |
| OC | 97.02 | 96.47 | 92.17 | 84.12 | 73.20 | 60.30 | 46.19 | 31.42 | 16.81 | 4.59 |
| OD | 97.02 | 96.47 | 92.17 | 84.12 | 73.20 | 60.30 | 46.19 | 31.42 | 16.81 | 4.59 |

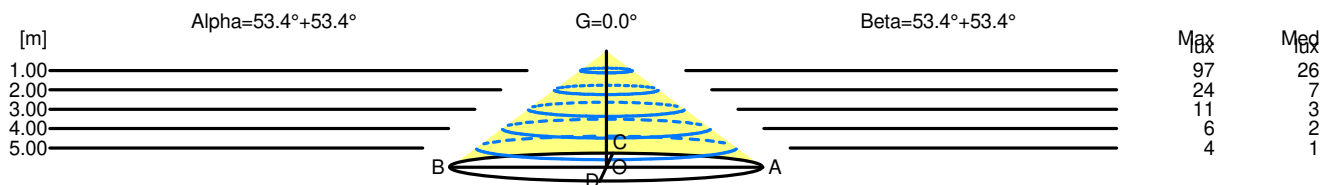

| H[m] | D[m] | Max lux | Med lux | Alpha=53.4°+53.4° | G=0.0 |
|------|-------|---------|---------|-------------------|-------|
| 1.00 | 2.69 | 97 | 26 | | |
| 2.00 | 5.39 | 24 | 7 | | |
| 3.00 | 8.08 | 11 | 3 | | |
| 4.00 | 10.77 | 6 | 2 | | |
| 5.00 | 13.47 | 4 | 1 | | |

| H[m] | D[m] | Max lux | Med lux | Beta=53.4°+53.4° | G=0.0 |
|------|-------|---------|---------|------------------|-------|
| 1.00 | 2.69 | 97 | 26 | | |
| 2.00 | 5.39 | 24 | 7 | | |
| 3.00 | 8.08 | 11 | 3 | | |
| 4.00 | 10.77 | 6 | 2 | | |
| 5.00 | 13.47 | 4 | 1 | | |