

Luminaire


Code 0918W10A
Name Mesmeri LED 2700K - bianco

Measurum.

Code FTS1700093
Name Mesmeri LED 2700K - bianco

Luminaire Flux	2450.00 lm	Luminaire Power	28.00 W	Efficacy	87.50 lm/W	Efficiency	100.00%
Sources Flux	2450.00 lm	Maximum value	377.62 cd/klm	Position	C=0.00 G=140.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	340 mm	Width	234 mm	Height	154 mm
Rectangular Luminous Area		Length	145 mm	Width	50 mm	Height	29 mm
Horizontal Luminous Area		0.007250 m ²		Emitting area on Plane 180°		0.004350 m ²	
Emitting area on Plane 0°		0.004350 m ²		Emitting area on Plane 270°		0.001500 m ²	
Emitting area on Plane 90°		0.001500 m ²		Glare area at 76°		0.005975 m ²	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		04-03-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2450.00 lm	
LED Flux=2634,41lm LED Power=25W Eff=93% EfcLed=105lm/W EfcLum=88lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E.	31 55 70 8 100			D DIN 5040	--		
F UTE	0.08 H + 0.92 T			B NBN	BZ 7 / 2 / BZ 8 / 4 / BZ 9		

340mm x 234mm




Sempiani C

180.0 ——— 0.0
270.0 ——— 90.0

ULOR 91.98 %

DLOR 8.02 %

RN 91.98 %

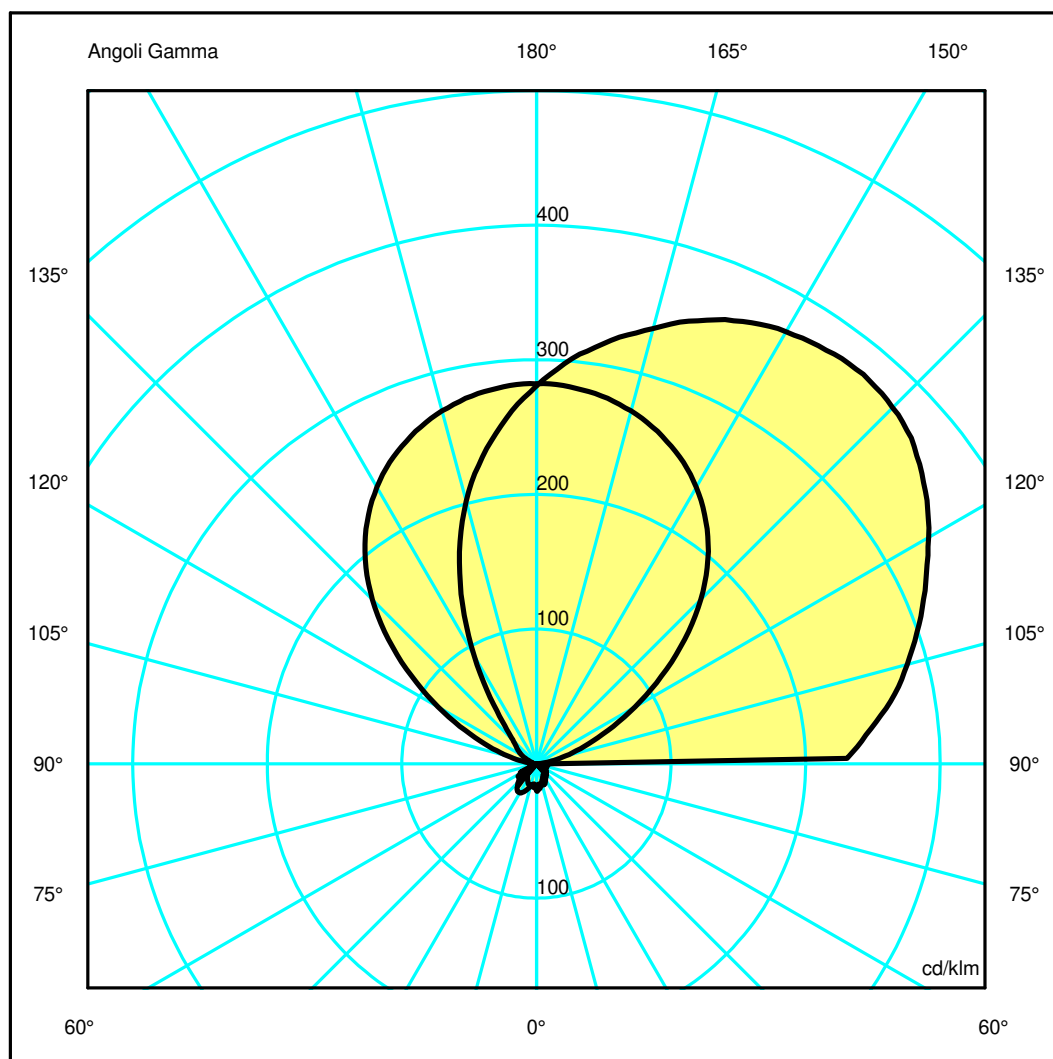

Luminaire

Code 0918W10A
Name Mesmeri LED 2700K - bianco

Measurem.

Code FTS1700093
Name Mesmeri LED 2700K - bianco

Luminaire Flux	2450.00 lm	Luminaire Power	28.00 W	Efficacy	87.50 lm/W	Efficiency	100.00%
Sources Flux	2450.00 lm	Maximum value	377.62 cd/klm	Position	C=0.00 G=140.00	CG	Sym. on planes 0-180
Rectangular Luminaire		Length	340 mm	Width	234 mm	Height	154 mm
Rectangular Luminous Area		Length	145 mm	Width	50 mm	Height	29 mm
Horizontal Luminous Area		0.007250 m2		Emitting area on Plane 180°		0.004350 m2	
Emitting area on Plane 0°		0.004350 m2		Emitting area on Plane 270°		0.001500 m2	
Emitting area on Plane 90°		0.001500 m2		Glare area at 76°		0.005975 m2	
Coordinate system		CG		Symmetry Type		Sym. on planes 0-180	
Date		04-03-2014		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		2450.00 lm	
LED Flux=2634,41lm LED Power=25W Eff=93% EfcLed=105lm/W EfcLum=88lm/W Ra=90 SDCM=2 L70(6K)=36000h							
C.I.E.	31 55 70 8 100			D DIN 5040	--		
F UTE	0.08 H + 0.92 T			B NBN	BZ 7 / 2 / BZ 8 / 4 / BZ 9		

Apertura troppo larga

Apertura troppo larga

Apertura troppo larga