

Luminaire

Code AT01200+AT10200
 Name A.39 MODULO TLESS DIFF L=2368mm 840 DIM

Measurement

Code FTS1800985
 Name A.39 MODULO TLESS DIFF L=2368mm 840 DIM


Luminaire Flux	4139.74 lm	Luminaire Power	63.00 W	Efficacy	65.71 lm/W	Efficiency	100.00%
Sources Flux	4139.74 lm	Maximum value	395.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	92 mm	Height	35 mm
Rectangular Luminous Area		Length	2360 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.094400 m2			Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°			0.022837 m2
Coordinate system	CG			Symmetry Type		Double Symmetrical	
Date	22-05-2018			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		4139.74 lm	

LED Flux=9676,8lm LED Power=59W Eff=43% EfcLed=164lm/W EfcLum=66lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h

C.I.E. 50 80 96 100 100
 F UTE 1.00 E

D DIN 5040
 B NBN

A30
 BZ 4

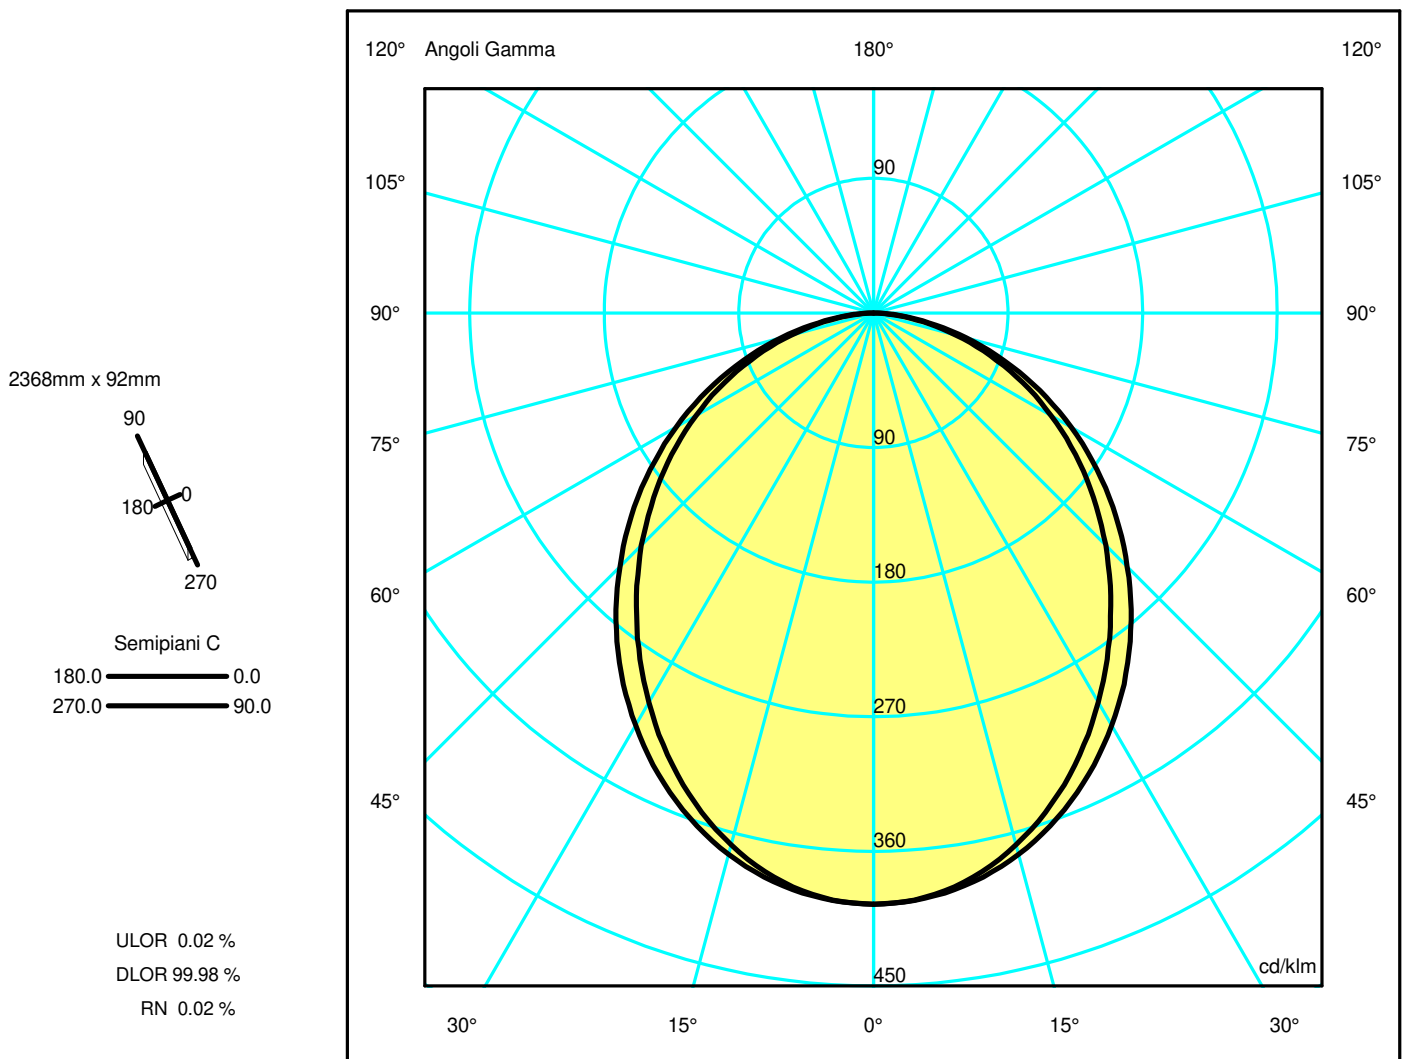

Luminaire

Code AT01200+AT10200
Name A.39 MODULO TLESS DIFF L=2368mm 840 DIM

Measurment.

Code FTS1800985
Name A.39 MODULO TLESS DIFF L=2368mm 840 DIM

Luminaire Flux	4139.74 lm	Luminaire Power	63.00 W	Efficacy	65.71 lm/W	Efficiency	100.00%
Sources Flux	4139.74 lm	Maximum value	395.22 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2368 mm	Width	92 mm	Height	35 mm
Rectangular Luminous Area		Length	2360 mm	Width	40 mm	Height	0 mm
Horizontal Luminous Area	0.094400 m2			Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°	0.000000 m2			Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°	0.000000 m2			Glare area at 76°			0.022837 m2
Coordinate system	CG			Symmetry Type			Double Symmetrical
Date	22-05-2018			Maximum Gamma Angle			180
Measurement Distance	0.00			Measurement Flux			4139.74 lm


LED Flux=9676,8lm LED Power=59W Eff=43% EfcLed=164lm/W EfcLum=66lm/W CCT=4000K Ra=80 SDCM=2 L70(6K)=50000h

C.I.E.	50 80 96 100 100	D DIN 5040	A30
F UTE	1.00 E	B NBN	BZ 4

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.15	2.30	3.44	4.59	5.74	OC	1.30	2.60	3.90	5.19	6.49
OB	1.15	2.30	3.44	4.59	5.74	OD	1.30	2.60	3.90	5.19	6.49

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1636.10	1623.59	1523.78	1349.52	1132.99	909.28	682.12	455.16	235.71	59.03
OB	1636.10	1623.59	1523.78	1349.52	1132.99	909.28	682.12	455.16	235.71	59.03
OC	1636.10	1626.20	1550.95	1409.18	1217.60	992.86	754.76	507.87	264.61	69.21
OD	1636.10	1626.20	1550.95	1409.18	1217.60	992.86	754.76	507.87	264.61	69.21

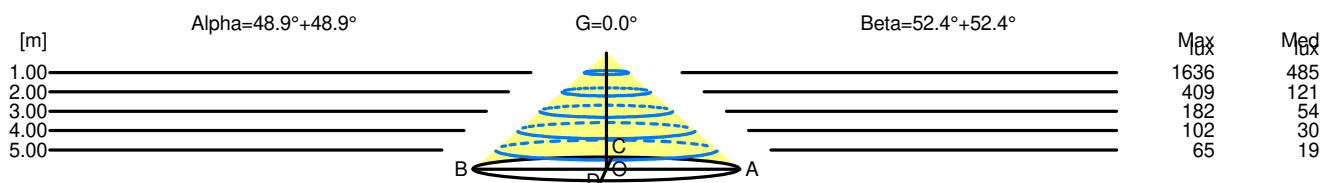

H[m]	D[m]	Max lux	Med lux	Alpha=48.9°+48.9°	G=0.0
1.00	2.30	1636	485		
2.00	4.59	409	121		
3.00	6.89	182	54		
4.00	9.18	102	30		
5.00	11.48	65	19		

H[m]	D[m]	Max lux	Med lux	Beta=52.4°+52.4°	G=0.0
1.00	2.60	1636	485		
2.00	5.19	409	121		
3.00	7.79	182	54		
4.00	10.39	102	30		
5.00	12.98	65	19		