

## Luminaire

Code AP10201+AP91400  
 Name VECTOR 55 MAGNET 930 FL DALI BCO + ANTI-DAZZLE LOUVRE

## Measurement

Code FTS1800380-B  
 Name VECTOR 55 MAGNET 930 FL DALI BCO + ANTI-DAZZLE LOUVRE

Luminaire Flux	1277 lm	Luminaire Power	19.0 W	Efficacy	67.211 lm/W	Efficiency	100.00%
Source Flux	1277 lm	Maximum value	6688.13 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	48 mm	Height	0 mm		
Horizontal Luminous Area		0.001810 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000438 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1277 lm	
LED Flux=2491lm LED Power=17W Eff=51% EfcLed=143lm/W EfcLum=67lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1


Diam=55mm



Semipiani C

180.0 ——— 0.0

ULOR 0.00 %  
 DLOR 100.00 %  
 RN 0.00 %

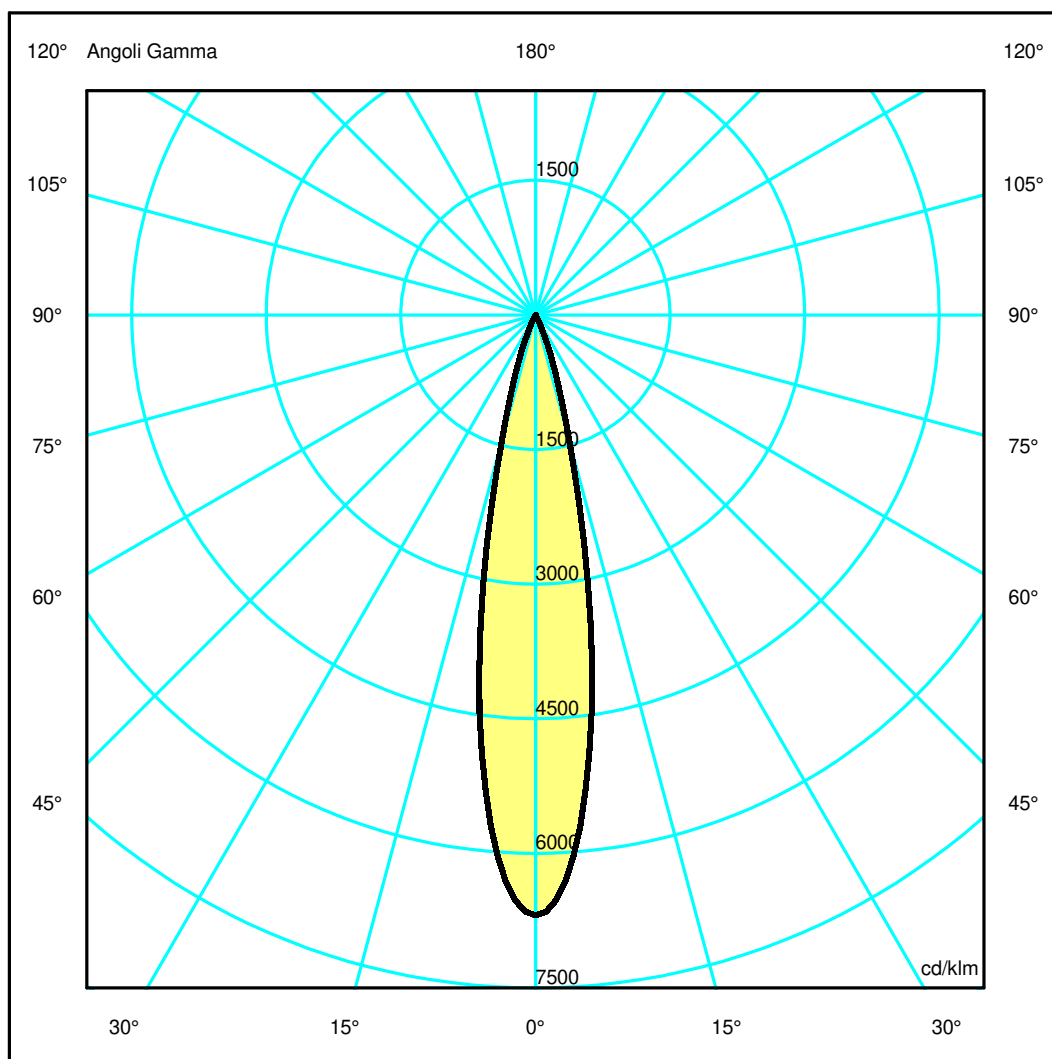

## Luminaire

Code AP10201+AP91400  
Name VECTOR 55 MAGNET 930 FL DALI BCO + ANTI-DAZZLE LOUVRE

## Measurement


Code FTS1800380-B  
Name VECTOR 55 MAGNET 930 FL DALI BCO + ANTI-DAZZLE LOUVRE

Luminaire Flux	1277 lm	Luminaire Power	19.0 W	Efficacy	67.211 lm/W	Efficiency	100.00%
Source Flux	1277 lm	Maximum value	6688.13 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	48 mm	Height	0 mm		
Horizontal Luminous Area		0.001810 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.000438 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		29-02-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1277 lm	
LED Flux=2491lm LED Power=17W Eff=51% EfcLed=143lm/W EfcLum=67lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	100	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.18	0.37	0.55	0.74	0.92	OC	0.18	0.37	0.55	0.74	0.92
OB	0.18	0.37	0.55	0.74	0.92	OD	0.18	0.37	0.55	0.74	0.92

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	8540.74	7296.46	1869.86	171.40	16.57	4.55	1.59	0.50	0.38	0.28
OB	8540.74	7296.46	1869.86	171.40	16.57	4.55	1.59	0.50	0.38	0.28
OC	8540.74	7296.46	1869.86	171.40	16.57	4.55	1.59	0.50	0.38	0.28
OD	8540.74	7296.46	1869.86	171.40	16.57	4.55	1.59	0.50	0.38	0.28

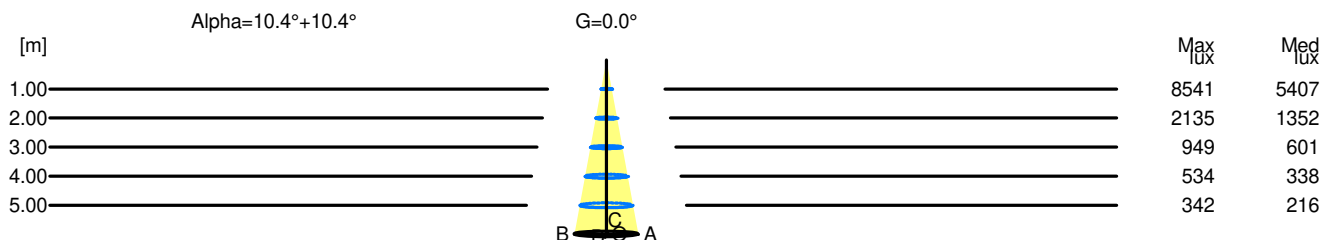

H[m]	D[m]	Max lux	Med lux	Alpha=10.4°+10.4°	G=0.0
1.00	0.37	8541	5407		
2.00	0.74	2135	1352		
3.00	1.10	949	601		
4.00	1.47	534	338		
5.00	1.84	342	216		