

Luminaire

Code M264200
 Name EVERYTHING 150 QUADRATO TRIMLESS FISSO LED FLOOD DEFL. NERO 3000K

Measurem.

Code FTS1602517
 Name EVERYTHING 150 QUADRATO TRIMLESS FISSO LED FLOOD DEFL. NERO 3000K

| | | | | | | | |
|--|------------|-----------------|----------------|-----------------------------|---------------|------------|-----------------|
| Luminaire Flux | 2044.62 lm | Luminaire Power | 24.00 W | Efficacy | 85.19 lm/W | Efficiency | 100.00% |
| Sources Flux | 2044.62 lm | Maximum value | 4914.34 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 150 mm | Height | 137 mm | | |
| Round Luminous Area | | Diam. | 120 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | | 0.011310 m2 | Emitting area on Plane 180° | | | 0.000000 m2 |
| Emitting area on Plane 0° | | | 0.000000 m2 | Emitting area on Plane 270° | | | 0.000000 m2 |
| Emitting area on Plane 90° | | | 0.000000 m2 | Glare area at 76° | | | 0.002736 m2 |
| Coordinate system | | CG | | Symmetry Type | | | Rotosymmetrical |
| Date | | 04-03-2015 | | Maximum Gamma Angle | | | 90 |
| Measurement Distance | | 0.00 | | Measurement Flux | | | 2044.62 lm |
| LED Flux=2763lm LED Power=24W Eff=74% EfcLed=115lm/W EfcLum=85lm/W Ra=90 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | D DIN 5040 | A60 | |
| F UTE | -- | | | | B NBN | BZ 1 | |

Diam=150mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

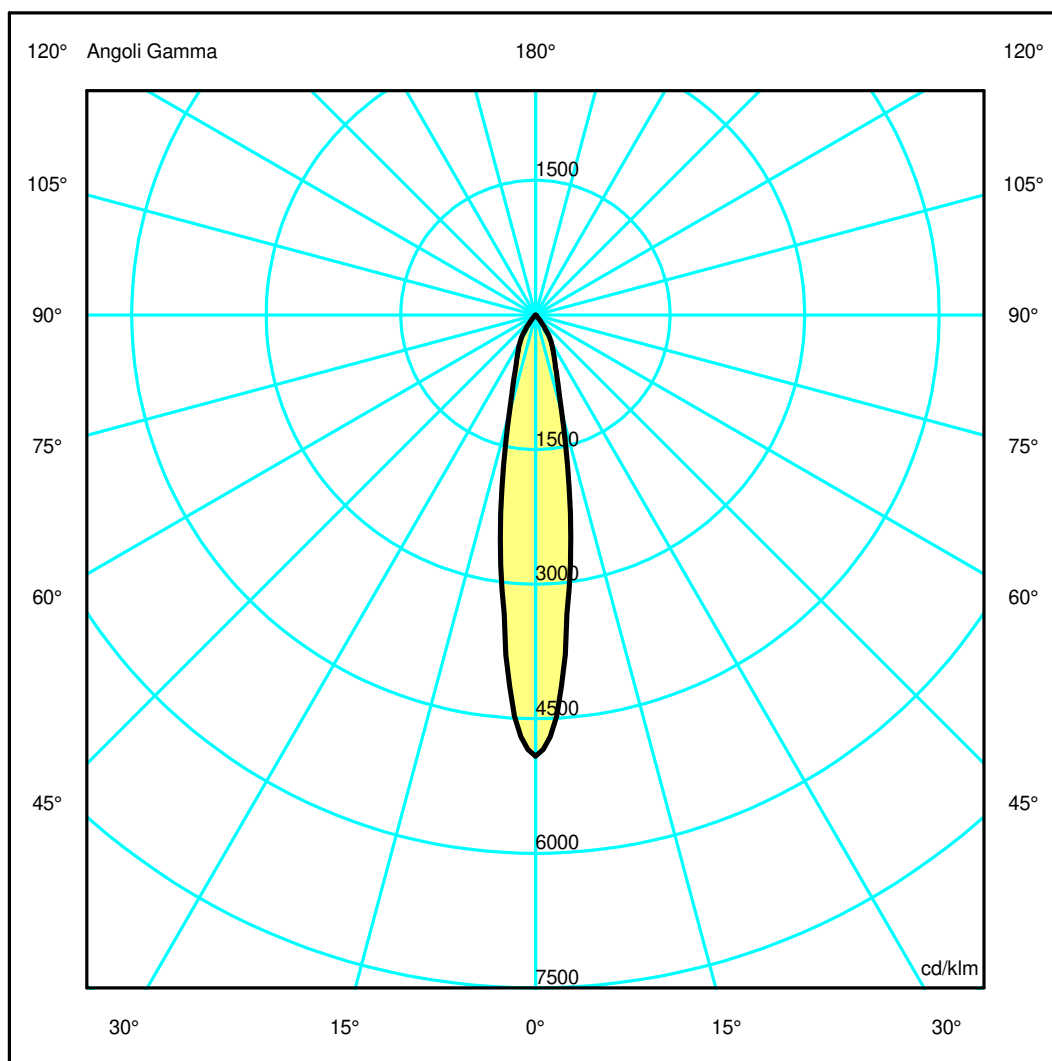

Luminaire

Code M264200
Name EVERYTHING 150 QUADRATO TRIMLESS FISSO LED FLOOD DEFL. NERO 3000K

Measurem.


Code FTS1602517
Name EVERYTHING 150 QUADRATO TRIMLESS FISSO LED FLOOD DEFL. NERO 3000K

| | | | | | | | |
|--|------------|-----------------|----------------|-----------------------------|---------------|--------------------|---------|
| Luminaire Flux | 2044.62 lm | Luminaire Power | 24.00 W | Efficacy | 85.19 lm/W | Efficiency | 100.00% |
| Sources Flux | 2044.62 lm | Maximum value | 4914.34 cd/klm | Position | C=0.00 G=0.00 | CG Rotosymmetrical | |
| Round Luminaire | | Diam. | 150 mm | Height | 137 mm | | |
| Round Luminous Area | | Diam. | 120 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.011310 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.002736 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 04-03-2015 | | Maximum Gamma Angle | | 90 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 2044.62 lm | |
| LED Flux=2763lm LED Power=24W Eff=74% EfcLed=115lm/W EfcLum=85lm/W Ra=90 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 99 | 100 | 100 | 100 | 100 | D DIN 5040 | A60 |
| F UTE | -- | | | | | B NBN | BZ 1 |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.16 | 0.32 | 0.49 | 0.65 | 0.81 | OC | 0.16 | 0.32 | 0.49 | 0.65 | 0.81 |
| OB | 0.16 | 0.32 | 0.49 | 0.65 | 0.81 | OD | 0.16 | 0.32 | 0.49 | 0.65 | 0.81 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|---------|---------|--------|--------|-------|------|------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 10047.97 | 7769.72 | 2311.33 | 966.70 | 395.32 | 28.50 | 5.65 | 0.74 | 0.24 | 0.08 |
| OB | 10047.97 | 7769.72 | 2311.33 | 966.70 | 395.32 | 28.50 | 5.65 | 0.74 | 0.24 | 0.08 |
| OC | 10047.97 | 7769.72 | 2311.33 | 966.70 | 395.32 | 28.50 | 5.65 | 0.74 | 0.24 | 0.08 |
| OD | 10047.97 | 7769.72 | 2311.33 | 966.70 | 395.32 | 28.50 | 5.65 | 0.74 | 0.24 | 0.08 |

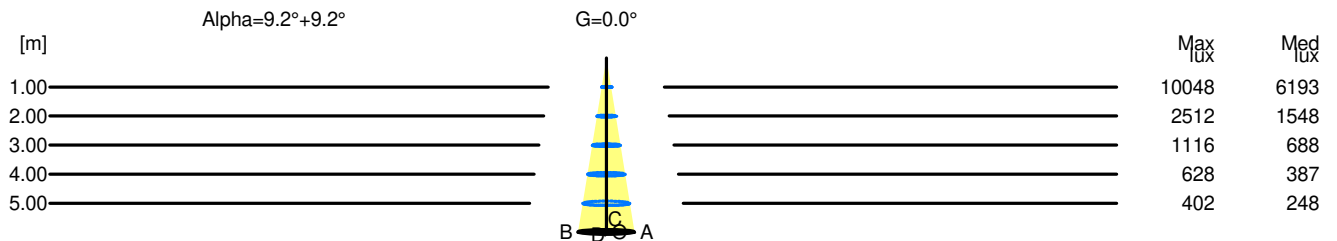

| H[m] | D[m] | Max lux | Med lux | Alpha=9.2°+9.2° | G=0.0 |
|------|------|---------|---------|-----------------|-------|
| 1.00 | 0.32 | 10048 | 6193 | | |
| 2.00 | 0.65 | 2512 | 1548 | | |
| 3.00 | 0.97 | 1116 | 688 | | |
| 4.00 | 1.30 | 628 | 387 | | |
| 5.00 | 1.62 | 402 | 248 | | |