

Luminaire

Code M261805
 Name EVERYTHING 150 TONDO TRIMLESS ORIENTABILE LED FLOOD DEFL. NERO 3000K

Measurem.

Code FTS1602507
 Name EVERYTHING 150 TONDO TRIMLESS ORIENTABILE LED FLOOD DEFL. NERO 3000K

Luminaire Flux	2044.62 lm	Luminaire Power	24.00 W	Efficacy	85.19 lm/W	Efficiency	100.00%
Sources Flux	2044.62 lm	Maximum value	4914.34 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	150 mm	Height	137 mm		
Round Luminous Area		Diam.	120 mm	Height	0 mm		
Horizontal Luminous Area		0.011310 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002736 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-03-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		2044.62 lm	
LED Flux=2763lm LED Power=24W Eff=74% EfcLed=115lm/W EfcLum=85lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

Diam=150mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

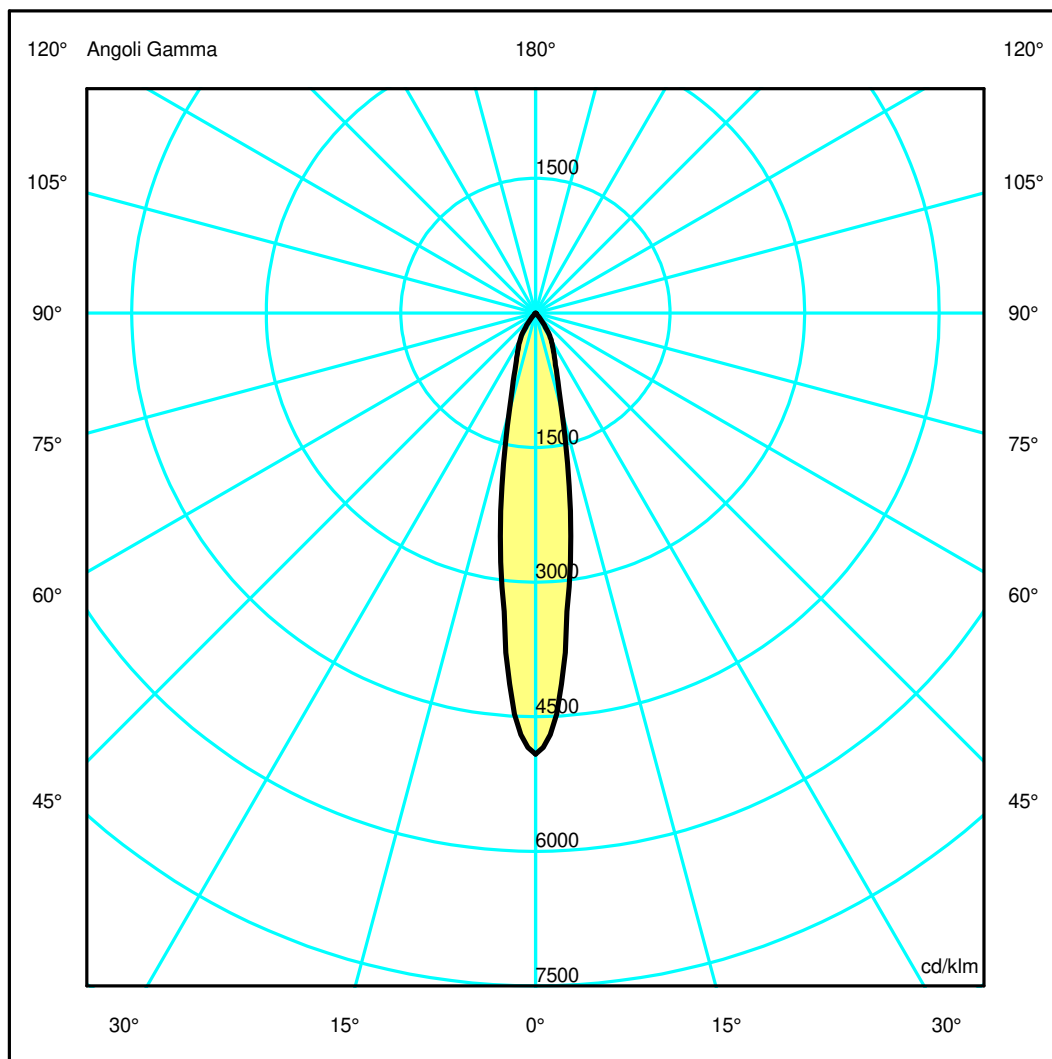

Luminaire

Code M261805
Name EVERYTHING 150 TONDO TRIMLESS ORIENTABILE LED FLOOD DEFL. NERO 3000K

Measurement


Code FTS1602507
Name EVERYTHING 150 TONDO TRIMLESS ORIENTABILE LED FLOOD DEFL. NERO 3000K

Luminaire Flux	2044.62 lm	Luminaire Power	24.00 W	Efficacy	85.19 lm/W	Efficiency	100.00%
Sources Flux	2044.62 lm	Maximum value	4914.34 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	150 mm	Height	137 mm		
Round Luminous Area		Diam.	120 mm	Height	0 mm		
Horizontal Luminous Area		0.011310 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002736 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		04-03-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		2044.62 lm	
LED Flux=2763lm LED Power=24W Eff=74% EfcLed=115lm/W EfcLum=85lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	99	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.16	0.32	0.49	0.65	0.81	OC	0.16	0.32	0.49	0.65	0.81
OB	0.16	0.32	0.49	0.65	0.81	OD	0.16	0.32	0.49	0.65	0.81

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	10047.97	7769.72	2311.33	966.70	395.32	28.50	5.65	0.74	0.24	0.08
OB	10047.97	7769.72	2311.33	966.70	395.32	28.50	5.65	0.74	0.24	0.08
OC	10047.97	7769.72	2311.33	966.70	395.32	28.50	5.65	0.74	0.24	0.08
OD	10047.97	7769.72	2311.33	966.70	395.32	28.50	5.65	0.74	0.24	0.08

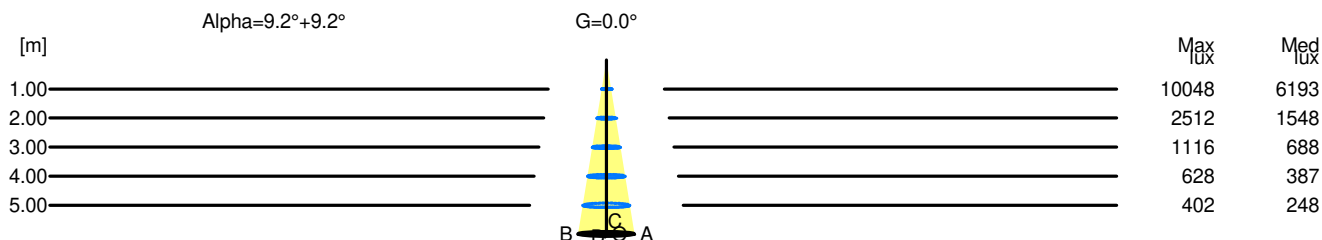

H[m]	D[m]	Max lux	Med lux	Alpha=9.2°+9.2°	G=0.0
1.00	0.32	10048	6193		
2.00	0.65	2512	1548		
3.00	0.97	1116	688		
4.00	1.30	628	387		
5.00	1.62	402	248		