

## Luminaire

Code M328220  
 Name EVERYTHING 105 TONDO TRIM FISSO LED 2700K FLOOD CORNICE BIANCO / DEFL. NERO

## Measurement

Code FTS1602776  
 Name EVERYTHING 105 TONDO TRIM FISSO LED 2700K FLOOD CORNICE BIANCO / DEFL. NERO

Luminaire Flux	817.95 lm	Luminaire Power	13.00 W	Efficacy	62.92 lm/W	Efficiency	100.00%
Sources Flux	817.95 lm	Maximum value	3263.81 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	105 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m <sup>2</sup>		Emitting area on Plane 180°		0.000000 m <sup>2</sup>	
Emitting area on Plane 0°		0.000000 m <sup>2</sup>		Emitting area on Plane 270°		0.000000 m <sup>2</sup>	
Emitting area on Plane 90°		0.000000 m <sup>2</sup>		Glare area at 76°		0.000475 m <sup>2</sup>	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		01-07-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		817.95 lm	
LED Flux=1330lm LED Power=13W Eff=61,5% EfcLed=102lm/W EfcLum=63lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	98	100	100	100	D DIN 5040	A60	
F UTE	--				B NBN	BZ 1	

Diam=105mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

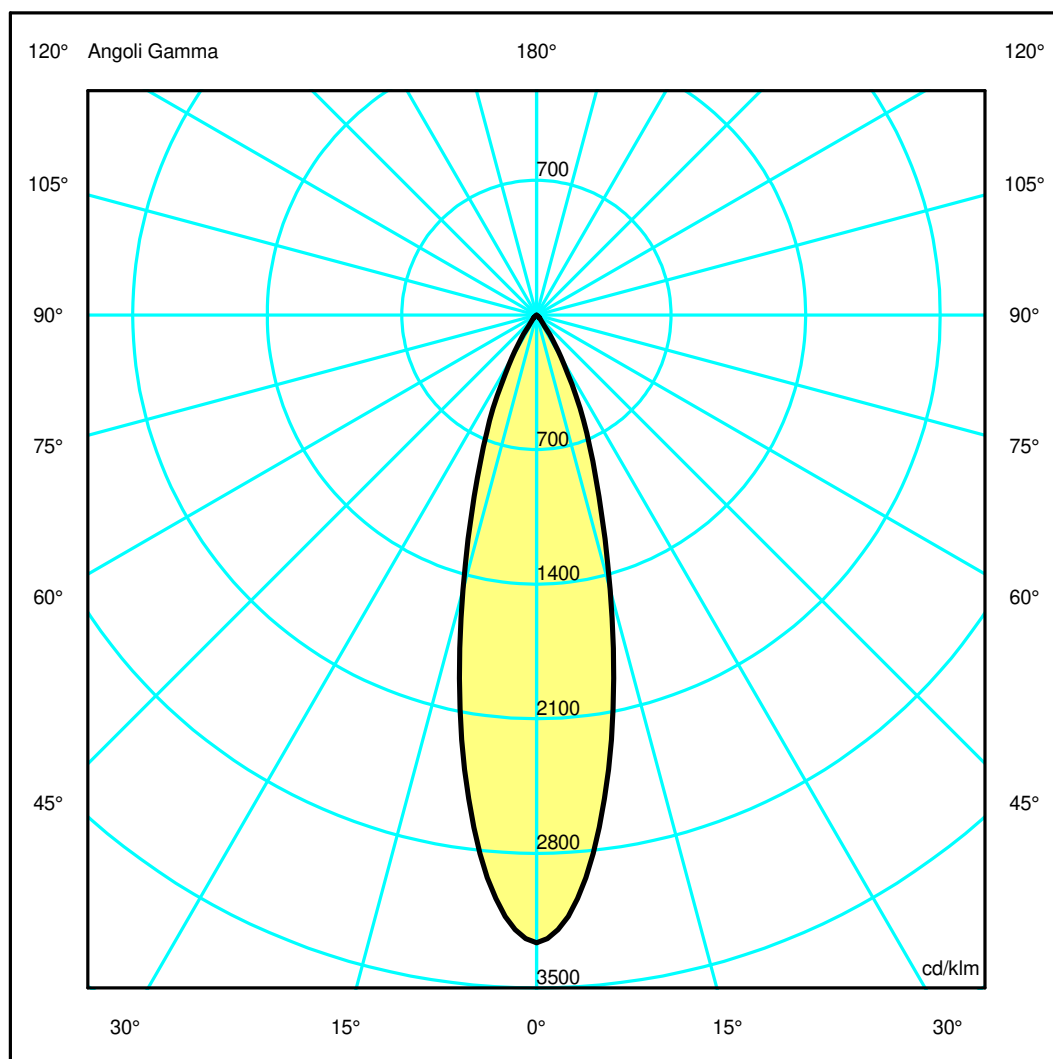

## Luminaire

Code M328220  
Name EVERYTHING 105 TONDO TRIM FISSO LED 2700K FLOOD CORNICE BIANCO / DEFL. NERO

## Measurement


Code FTS1602776  
Name EVERYTHING 105 TONDO TRIM FISSO LED 2700K FLOOD CORNICE BIANCO / DEFL. NERO

Luminaire Flux	817.95 lm	Luminaire Power	13.00 W	Efficacy	62.92 lm/W	Efficiency	100.00%
Sources Flux	817.95 lm	Maximum value	3263.81 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	105 mm	Height	115 mm		
Round Luminous Area		Diam.	50 mm	Height	0 mm		
Horizontal Luminous Area		0.001963 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000475 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		01-07-2015		Maximum Gamma Angle		90	
Measurement Distance		0.00		Measurement Flux		817.95 lm	
LED Flux=1330lm LED Power=13W Eff=61,5% EfcLed=102lm/W EfcLum=63lm/W Ra=90 SDCM=3 L70(6K)=50000h							
C.I.E.	98	100	100	100	100	D DIN 5040	A60
F UTE	--					B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.25	0.50	0.75	0.99	1.24	OC	0.25	0.50	0.75	0.99	1.24
OB	0.25	0.50	0.75	0.99	1.24	OD	0.25	0.50	0.75	0.99	1.24

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	2669.63	2402.71	1211.47	437.47	75.51	18.49	0.57	0.21	0.09	0.04
OB	2669.63	2402.71	1211.47	437.47	75.51	18.49	0.57	0.21	0.09	0.04
OC	2669.63	2402.71	1211.47	437.47	75.51	18.49	0.57	0.21	0.09	0.04
OD	2669.63	2402.71	1211.47	437.47	75.51	18.49	0.57	0.21	0.09	0.04

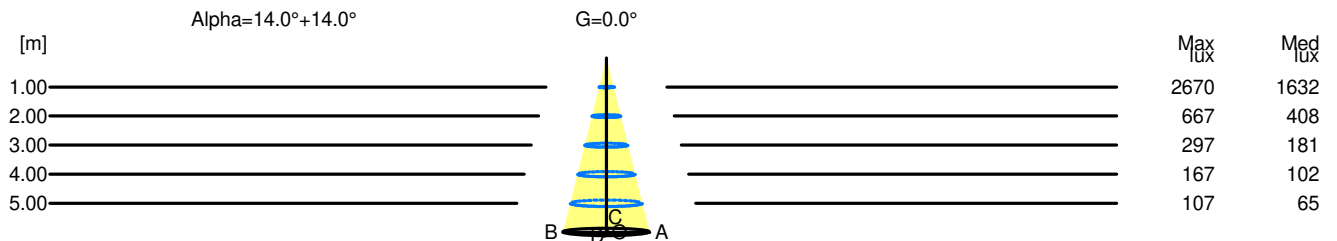

H[m]	D[m]	Max lux	Med lux	Alpha=14.0°+14.0°	G=0.0
1.00	0.50	2670	1632		
2.00	0.99	667	408		
3.00	1.49	297	181		
4.00	1.99	167	102		
5.00	2.48	107	65		