

Luminaire


Code M328360
 Name EVERYTHING 105 TONDO TRIM FISSO LED 2700K WIDE FLOOD CORNICE SILVER / DEFL. NERO

Measurement

Code FTS1602782
 Name EVERYTHING 105 TONDO TRIM FISSO LED 2700K WIDE FLOOD CORNICE SILVER / DEFL. NERO

| | | | | | | | |
|--|--------------------|-----------------|----------------|-----------------------------|---------------|------------|-----------------|
| Luminaire Flux | 695.59 lm | Luminaire Power | 13.00 W | Efficacy | 53.51 lm/W | Efficiency | 100.00% |
| Sources Flux | 695.59 lm | Maximum value | 1605.52 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 105 mm | Height | 115 mm | | |
| Round Luminous Area | | Diam. | 50 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | | 0.001963 m2 | Emitting area on Plane 180° | | | 0.000000 m2 |
| Emitting area on Plane 0° | | | 0.000000 m2 | Emitting area on Plane 270° | | | 0.000000 m2 |
| Emitting area on Plane 90° | | | 0.000000 m2 | Glare area at 76° | | | 0.000475 m2 |
| Coordinate system | | CG | | Symmetry Type | | | Rotosymmetrical |
| Date | | 03-07-2015 | | Maximum Gamma Angle | | | 180 |
| Measurement Distance | | 0.00 | | Measurement Flux | | | 695.59 lm |
| LED Flux=1330lm LED Power=13W Eff=52,3% EfcLed=102lm/W EfcLum=54lm/W Ra=90 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 97 100 100 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | 1.00 A | | | B NBN | BZ 1 | | |

Diam=105mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

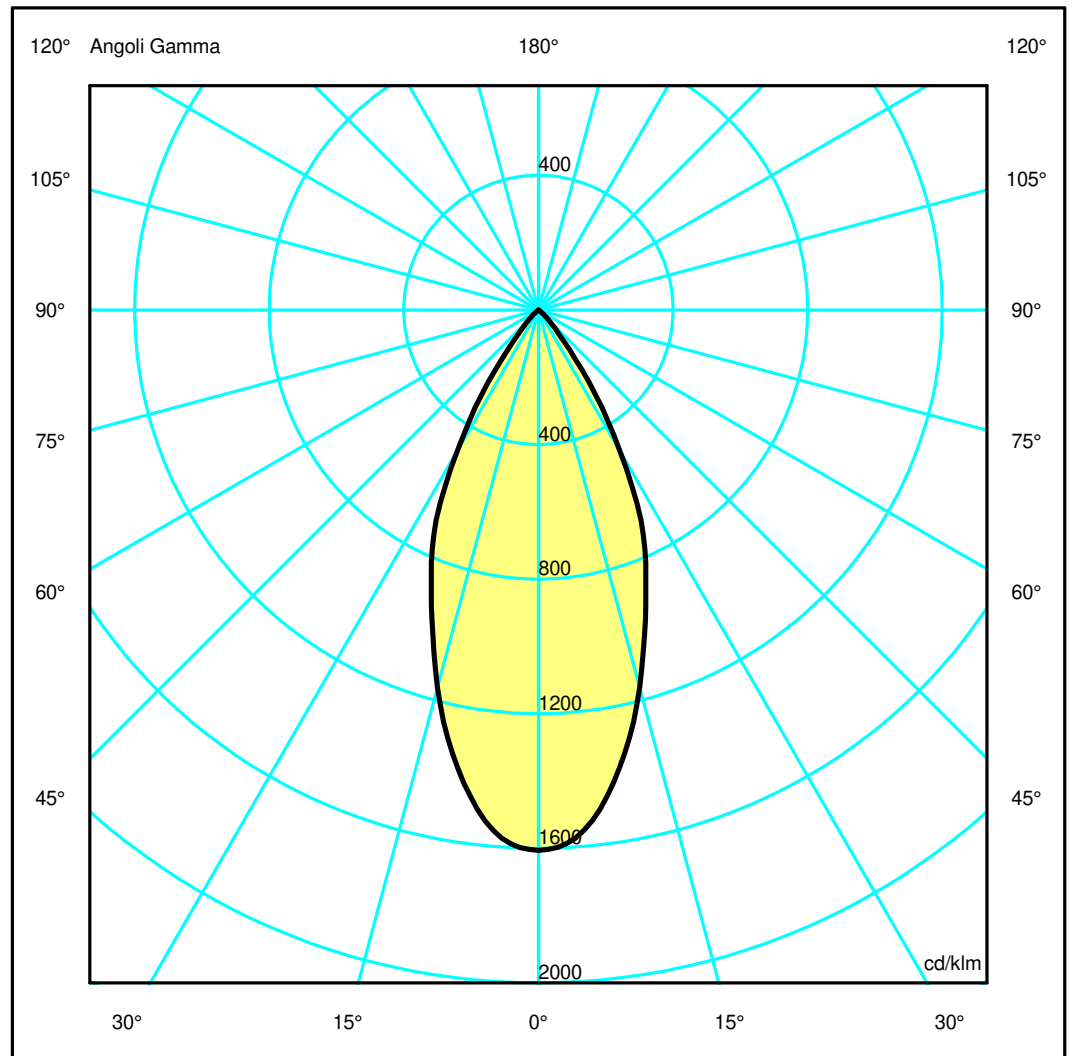

Luminaire

Code M328360
Name EVERYTHING 105 TONDO TRIM FISSO LED 2700K WIDE FLOOD CORNICE SILVER / DEFL. NERO

Measurement


Code FTS1602782
Name EVERYTHING 105 TONDO TRIM FISSO LED 2700K WIDE FLOOD CORNICE SILVER / DEFL. NERO

| | | | | | | | |
|--|--------------------|-----------------|----------------|-----------------------------|---------------|-----------------|-----------------|
| Luminaire Flux | 695.59 lm | Luminaire Power | 13.00 W | Efficacy | 53.51 lm/W | Efficiency | 100.00% |
| Sources Flux | 695.59 lm | Maximum value | 1605.52 cd/klm | Position | C=0.00 G=0.00 | CG | Rotosymmetrical |
| Round Luminaire | | Diam. | 105 mm | Height | 115 mm | | |
| Round Luminous Area | | Diam. | 50 mm | Height | 0 mm | | |
| Horizontal Luminous Area | | 0.001963 m2 | | Emitting area on Plane 180° | | 0.000000 m2 | |
| Emitting area on Plane 0° | | 0.000000 m2 | | Emitting area on Plane 270° | | 0.000000 m2 | |
| Emitting area on Plane 90° | | 0.000000 m2 | | Glare area at 76° | | 0.000475 m2 | |
| Coordinate system | | CG | | Symmetry Type | | Rotosymmetrical | |
| Date | | 03-07-2015 | | Maximum Gamma Angle | | 180 | |
| Measurement Distance | | 0.00 | | Measurement Flux | | 695.59 lm | |
| LED Flux=1330lm LED Power=13W Eff=52,3% EfcLed=102lm/W EfcLum=54lm/W Ra=90 SDCM=3 L70(6K)=50000h | | | | | | | |
| C.I.E. | 97 100 100 100 100 | | | D DIN 5040 | A60 | | |
| F UTE | 1.00 A | | | B NBN | BZ 1 | | |

Width at 50.00 % of Max Intensity

| H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 | H[m] | 1.00 | 2.00 | 3.00 | 4.00 | 5.00 |
|------|------|------|------|------|------|------|------|------|------|------|------|
| OA | 0.43 | 0.86 | 1.29 | 1.72 | 2.16 | OC | 0.43 | 0.86 | 1.29 | 1.72 | 2.16 |
| OB | 0.43 | 0.86 | 1.29 | 1.72 | 2.16 | OD | 0.43 | 0.86 | 1.29 | 1.72 | 2.16 |

| | Luminous Intensities [cd/klm] | | | | | | | | | |
|----|---------------------------------|---------|--------|--------|--------|-------|------|------|------|------|
| | 0 | 5 | 15 | 25 | 35 | 45 | 55 | 65 | 75 | 85 |
| OA | 1116.79 | 1079.61 | 807.64 | 511.66 | 182.44 | 30.03 | 1.58 | 0.62 | 0.35 | 0.25 |
| OB | 1116.79 | 1079.61 | 807.64 | 511.66 | 182.44 | 30.03 | 1.58 | 0.62 | 0.35 | 0.25 |
| OC | 1116.79 | 1079.61 | 807.64 | 511.66 | 182.44 | 30.03 | 1.58 | 0.62 | 0.35 | 0.25 |
| OD | 1116.79 | 1079.61 | 807.64 | 511.66 | 182.44 | 30.03 | 1.58 | 0.62 | 0.35 | 0.25 |

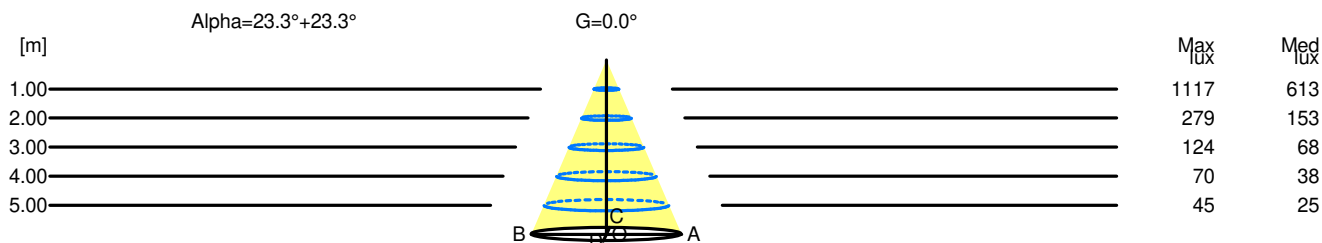

| H[m] | D[m] | Max lux | Med lux | Alpha=23.3°+23.3° | G=0.0 |
|------|------|---------|---------|-------------------|-------|
| 1.00 | 0.86 | 1117 | 613 | | |
| 2.00 | 1.72 | 279 | 153 | | |
| 3.00 | 2.59 | 124 | 68 | | |
| 4.00 | 3.45 | 70 | 38 | | |
| 5.00 | 4.31 | 45 | 25 | | |