


## Luminaire

Code M324105\_0°  
Name EVERY 150 RD TRLS OR LED 2700K 2X30°NO\_0°

## Measurement

Code FTS2400300.  
Name EVERY 150 RD TRLS OR LED 2700K 2X30°NO\_0°

Luminaire Flux	1434 lm	Luminaire Power	20.0 W	Efficacy	71.700 lm/W	Efficiency	100.00%
Source Flux	1434 lm	Maximum value	1109.04 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	136 mm	Height	138 mm		
Round Luminous Area		Diam.	121 mm	Height	0 mm		
Horizontal Luminous Area		0.011499 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002782 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1434 lm	
LED Flux=2979lm LED Power=20W Eff=48% EfcLed=149lm/W EfcLum=72lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	95 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

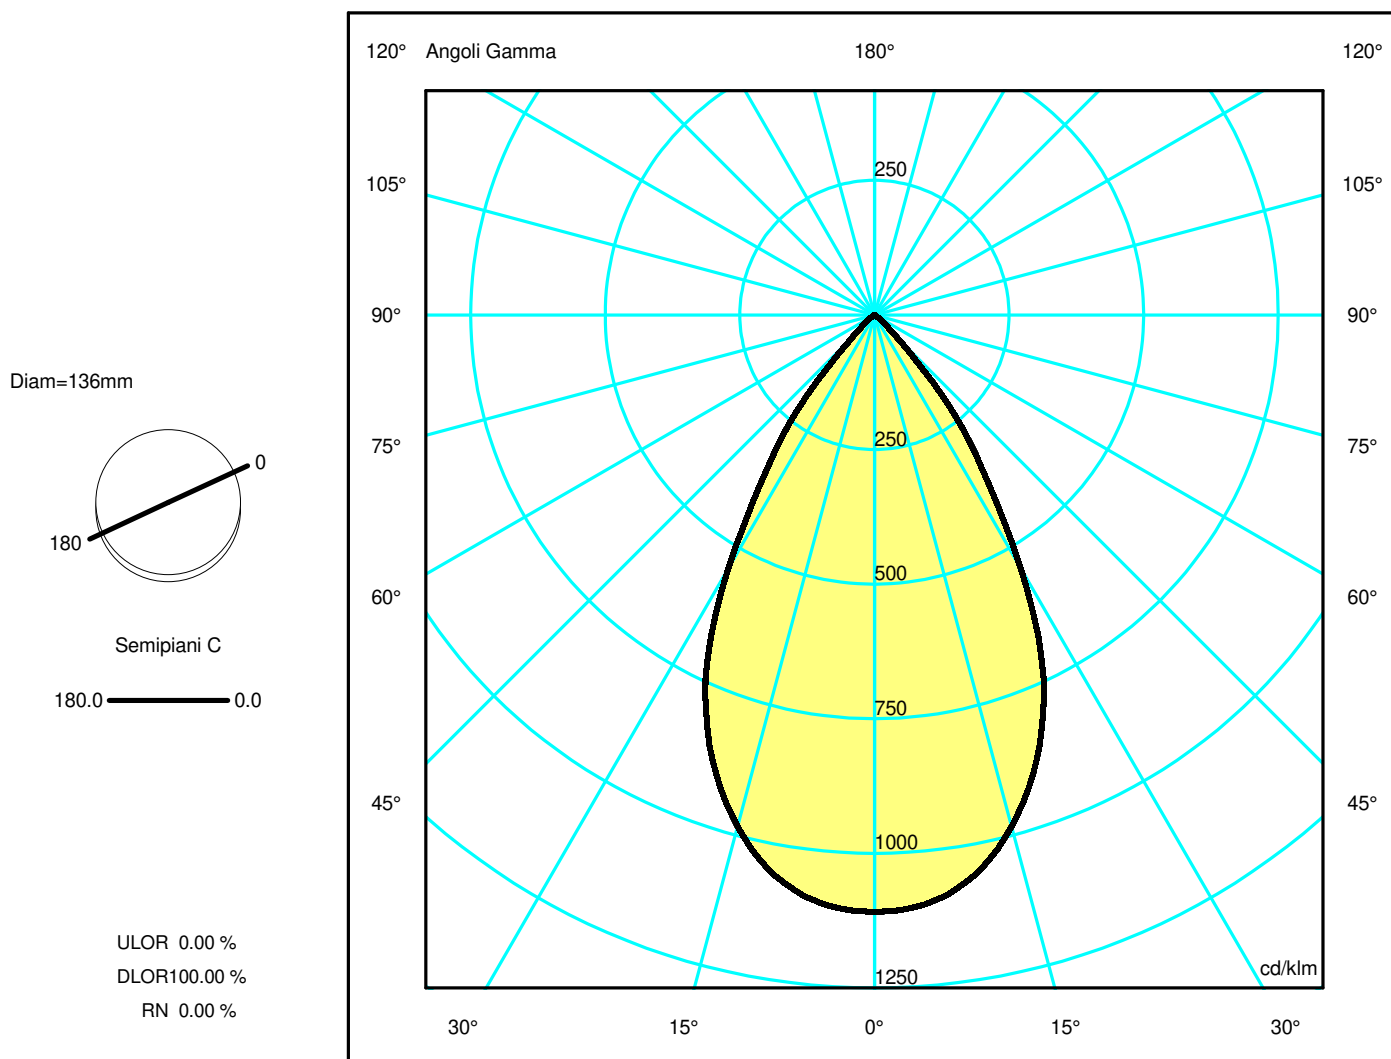

## Luminaire

Code M324105\_0°  
Name EVERY 150 RD TRLS OR LED 2700K 2X30°NO\_0°

## Measurerm.


Code FTS2400300.  
Name EVERY 150 RD TRLS OR LED 2700K 2X30°NO\_0°

Luminaire Flux	1434 lm	Luminaire Power	20.0 W	Efficacy	71.700 lm/W	Efficiency	100.00%
Source Flux	1434 lm	Maximum value	1109.04 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	136 mm	Height	138 mm		
Round Luminous Area		Diam.	121 mm	Height	0 mm		
Horizontal Luminous Area		0.011499 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002782 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		06-06-2024		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1434 lm	
LED Flux=2979lm LED Power=20W Eff=48% EfcLed=149lm/W EfcLum=72lm/W CCT=2700K Ra=90 R9=50 SDCM=3 L70(9k)=50000h							
C.I.E.	95 100 100 100 100			D DIN 5040	A60		
F UTE	1.00 A			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.57	1.14	1.71	2.29	2.86	OC	0.57	1.14	1.71	2.29	2.86
OB	0.57	1.14	1.71	2.29	2.86	OD	0.57	1.14	1.71	2.29	2.86

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	1590.36	1574.49	1410.11	1065.96	500.02	84.65	10.14	1.88	0.80	0.40
OB	1590.36	1574.49	1410.11	1065.96	500.02	84.65	10.14	1.88	0.80	0.40
OC	1590.36	1574.49	1410.11	1065.96	500.02	84.65	10.14	1.88	0.80	0.40
OD	1590.36	1574.49	1410.11	1065.96	500.02	84.65	10.14	1.88	0.80	0.40

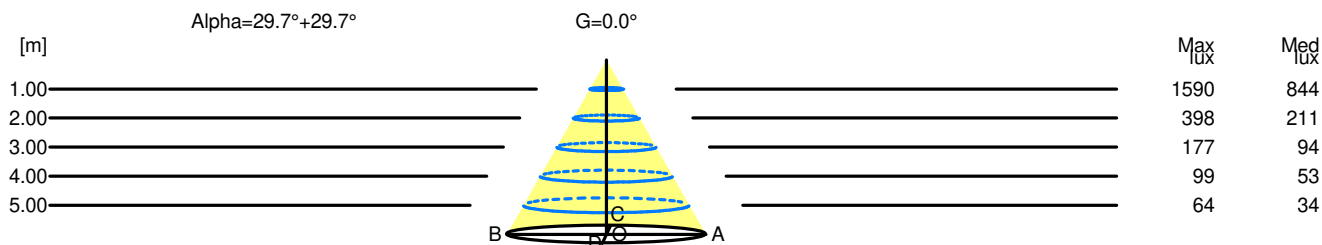

H[m]	D[m]	Max lux	Med lux	Alpha=29.7°+29.7°	G=0.0
1.00	1.14	1590	844		
2.00	2.29	398	211		
3.00	3.43	177	94		
4.00	4.57	99	53		
5.00	5.71	64	34		