

## Luminaire

Code 0762W30A+0781020A  
 Name TOLOMEO MEGA LED BODY BLK DIMM/CABLE + TOLOMEO MEGA DIFF.RASO 360- 2700K

## Measurem.

Code FTS1701388  
 Name TOLOMEO MEGA LED BODY BLK DIMM/CABLE + TOLOMEO MEGA DIFF.RASO 360- 2700K

Luminaire Flux	1786.22 lm	Luminaire Power	31.00 W	Efficacy	57.62 lm/W	Efficiency	100.00%
Sources Flux	1786.22 lm	Maximum value	483.34 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	360 mm	Height	250 mm		
Round Luminous Area		Diam.	360 mm	Height	250 mm		
Horizontal Luminous Area			0.101788 m2	Emitting area on Plane 180°			0.090000 m2
Emitting area on Plane 0°			0.090000 m2	Emitting area on Plane 270°			0.090000 m2
Emitting area on Plane 90°			0.090000 m2	Glare area at 76°			0.111951 m2
Coordinate system		CG		Symmetry Type			Rotosymmetrical
Date		23-09-2016		Maximum Gamma Angle			180
Measurement Distance		0.00		Measurement Flux			1786.22 lm


LED Flux=2722,9lm LED Power=25,6W Eff=66% EfcLed=106lm/W EfcLum=58lm/W Ra=90 SDCM=2 L70(6K)=50000h

C.I.E. 69 88 97 90 100  
 F UTE 0.90 C + 0.10 T

D DIN 5040  
 B NBN

B51  
 BZ 2 / 1.25 / BZ 3

Diam=360mm




Semipiani C

180.0 ——— 0.0

ULOR 10.35 %

DLOR 89.65 %

RN 10.35 %

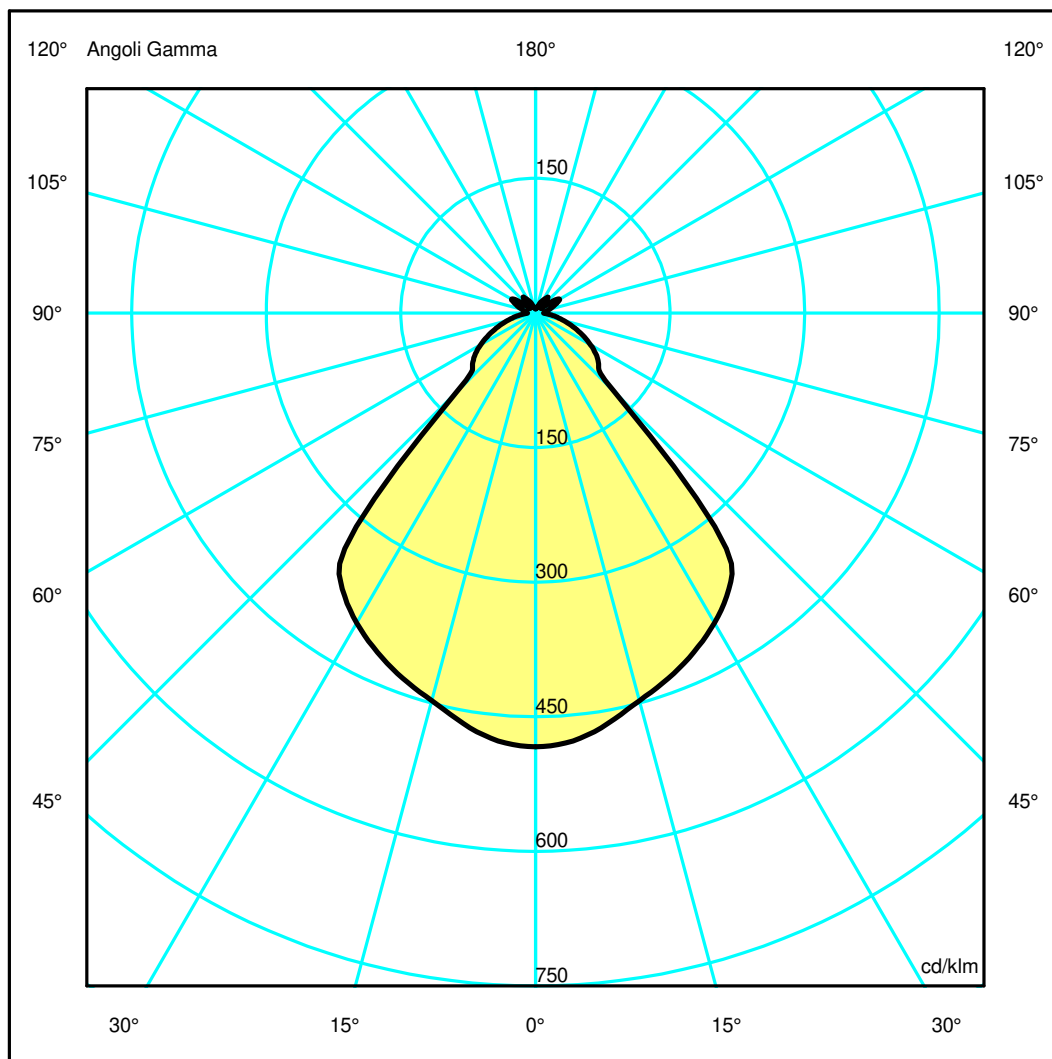

## Luminaire

Code 0762W30A+0781020A  
 Name TOLOMEO MEGA LED BODY BLK DIMM/CABLE + TOLOMEO MEGA DIFF.RASO 360- 2700K

## Measurement

Code FTS1701388  
 Name TOLOMEO MEGA LED BODY BLK DIMM/CABLE + TOLOMEO MEGA DIFF.RASO 360- 2700K

Luminaire Flux	1786.22 lm	Luminaire Power	31.00 W	Efficacy	57.62 lm/W	Efficiency	100.00%
Sources Flux	1786.22 lm	Maximum value	483.34 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	360 mm	Height	250 mm		
Round Luminous Area		Diam.	360 mm	Height	250 mm		
Horizontal Luminous Area		0.101788 m2		Emitting area on Plane 180°		0.090000 m2	
Emitting area on Plane 0°		0.090000 m2		Emitting area on Plane 270°		0.090000 m2	
Emitting area on Plane 90°		0.090000 m2		Glare area at 76°		0.111951 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		23-09-2016		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1786.22 lm	


LED Flux=2722,9lm LED Power=25,6W Eff=66% EfcLed=106lm/W EfcLum=58lm/W Ra=90 SDCM=2 L70(6K)=50000h

C.I.E.	69 88 97 90 100	D DIN 5040	B51
F UTE	0.90 C + 0.10 T	B NBN	BZ 2 / 1.25 / BZ 3

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.89	1.78	2.68	3.57	4.46	OC	0.89	1.78	2.68	3.57	4.46
OB	0.89	1.78	2.68	3.57	4.46	OD	0.89	1.78	2.68	3.57	4.46

	Luminous Intensities [ cd/klm ]									
	0	5	15	25	35	45	55	65	75	85
OA	863.36	854.85	798.76	745.32	670.64	223.22	148.15	102.50	58.60	26.35
OB	863.36	854.85	798.76	745.32	670.64	223.22	148.15	102.50	58.60	26.35
OC	863.36	854.85	798.76	745.32	670.64	223.22	148.15	102.50	58.60	26.35
OD	863.36	854.85	798.76	745.32	670.64	223.22	148.15	102.50	58.60	26.35

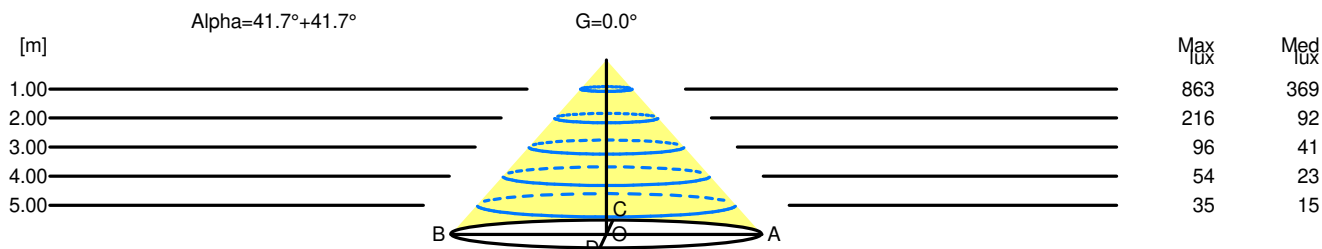

H[m]	D[m]	Max lux	Med lux	Alpha=41.7°+41.7°	G=0.0
1.00	1.78	863	369		
2.00	3.57	216	92		
3.00	5.35	96	41		
4.00	7.13	54	23		
5.00	8.92	35	15		