

## Luminaire

Code 0231520A  
Name GIO light S DECENTRATA NRO new

## Measurerm.

Code FTS2400042  
Name GIO light S DECENTRATA NRO new

Luminaire Flux	425 lm	Luminaire Power	9.0 W	Efficacy	47.222 lm/W	Efficiency	100.00%
Source Flux	425 lm	Maximum value	603.48 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	107 mm	Height	102 mm		
Round Luminous Area		Diam.	104 mm	Height	0 mm		
Horizontal Luminous Area			0.008495 m2	Emitting area on Plane 180°			0.000000 m2
Emitting area on Plane 0°			0.000000 m2	Emitting area on Plane 270°			0.000000 m2
Emitting area on Plane 90°			0.000000 m2	Glare area at 76°			0.002055 m2
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		19-04-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		425 lm	
LED Flux=637lm LED Power=6.3W Eff=67% EfcLed=101lm/W EfcLum=47lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(11K)=61000h							
C.I.E.	66 89 98 100 100			D DIN 5040	A50		
F UTE	1.00 C			B NBN	BZ 2 / 2.5 / BZ 3		

Diam=107mm




Semipiani C

180.0 ——— 0.0

ULOR 0.01 %

DLOR 99.99 %

RN 0.01 %

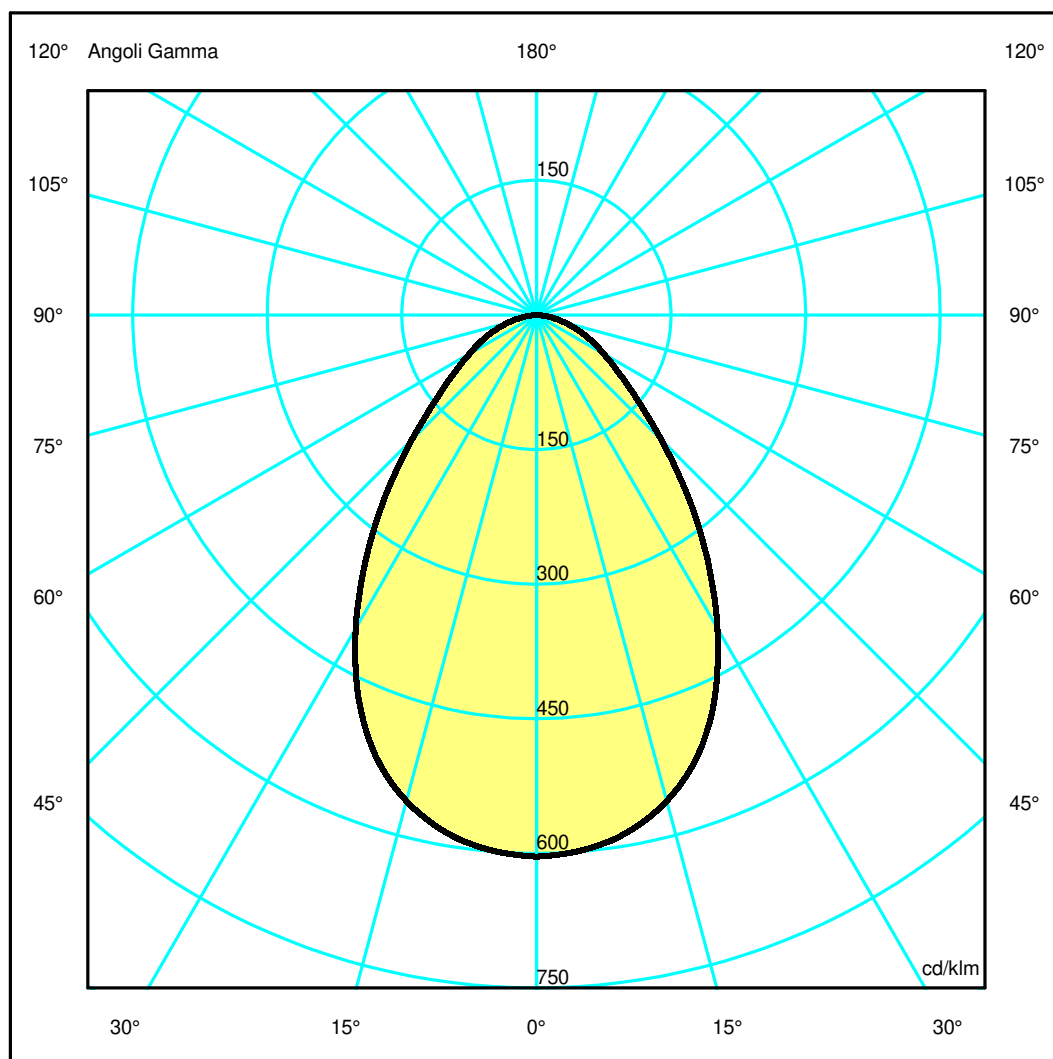

## Luminaire

Code 0231520A  
Name GIO light S DECENTRATA NRO new

## Measurment.


Code FTS2400042  
Name GIO light S DECENTRATA NRO new

Luminaire Flux	425 lm	Luminaire Power	9.0 W	Efficacy	47.222 lm/W	Efficiency	100.00%
Source Flux	425 lm	Maximum value	603.48 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	107 mm	Height	102 mm		
Round Luminous Area		Diam.	104 mm	Height	0 mm		
Horizontal Luminous Area		0.008495 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.002055 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		19-04-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		425 lm	
LED Flux=637lm LED Power=6.3W Eff=67% EfcLed=101lm/W EfcLum=47lm/W CCT=3000K Ra=90 R9=50 SDCM=2 L70(11K)=61000h							
C.I.E.	66 89 98 100 100			D DIN 5040	A50		
F UTE	1.00 C			B NBN	BZ 2 / 2.5 / BZ 3		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.76	1.51	2.27	3.03	3.78	OC	0.76	1.51	2.27	3.03	3.78
OB	0.76	1.51	2.27	3.03	3.78	OD	0.76	1.51	2.27	3.03	3.78

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	256.48	254.36	238.25	199.79	141.01	83.56	47.45	28.42	14.14	2.95
OB	256.48	254.36	238.25	199.79	141.01	83.56	47.45	28.42	14.14	2.95
OC	256.48	254.36	238.25	199.79	141.01	83.56	47.45	28.42	14.14	2.95
OD	256.48	254.36	238.25	199.79	141.01	83.56	47.45	28.42	14.14	2.95

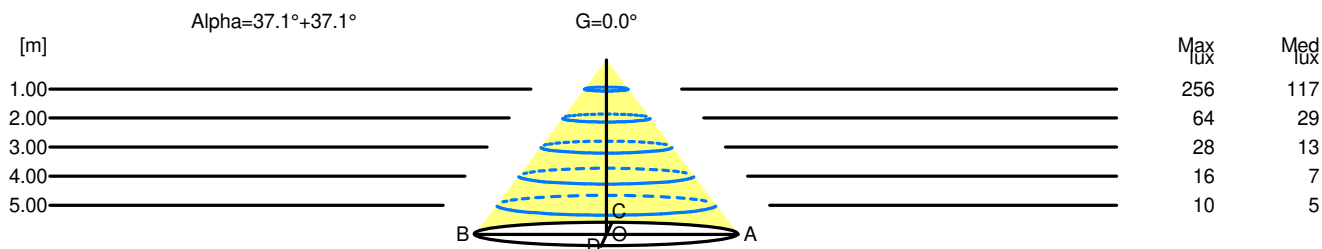

H[m]	D[m]	Max lux	Med lux	Alpha=37.1°+37.1°	G=0.0
1.00	1.51	256	117		
2.00	3.03	64	29		
3.00	4.54	28	13		
4.00	6.05	16	7		
5.00	7.56	10	5		