

Luminaire

Code AY06005
Name SERIES Y-MOD.1200MM DARK+IND 930 SIL

Measurement

Code FTS1802395-A
Name SERIES Y-MOD.1200MM DARK+IND 930 SIL

Luminaire Flux	5132 lm	Luminaire Power	55.0 W	Efficacy	93.303 lm/W	Efficiency	100.00%
Source Flux	5132 lm	Maximum value	436.71 cd/klm	Position	C=0.00 G=26.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1125 mm	Width	90 mm	Height	90 mm
Rectangular Luminous Area		Length	1120 mm	Width	75 mm	Height	0 mm
Horizontal Luminous Area		0.084000 m2		Emitting area on Plane 180°	0.000000 m2		
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°	0.000000 m2		
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°	0.020321 m2		
Coordinate system		CG		Symmetry Type	Double Symmetrical		
Date		28-02-2022		Maximum Gamma Angle	180		
Measurement Distance		0.00		Measurement Flux	5132 lm		


LED Flux=7378lm LED Power=45W Eff=70% EfcLed=165lm/W EfcLum=93lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h

C.I.E. 82 99 100 59 100
F UTE 0.59 B + 0.41 T

D DIN 5040
B NBN

C61
BZ 1


1125mm x 90mm



Semipiani C

180.0 ——— 0.0
270.0 ——— 90.0

ULOR 41.31 %
DLOR 58.69 %
RN 41.31 %

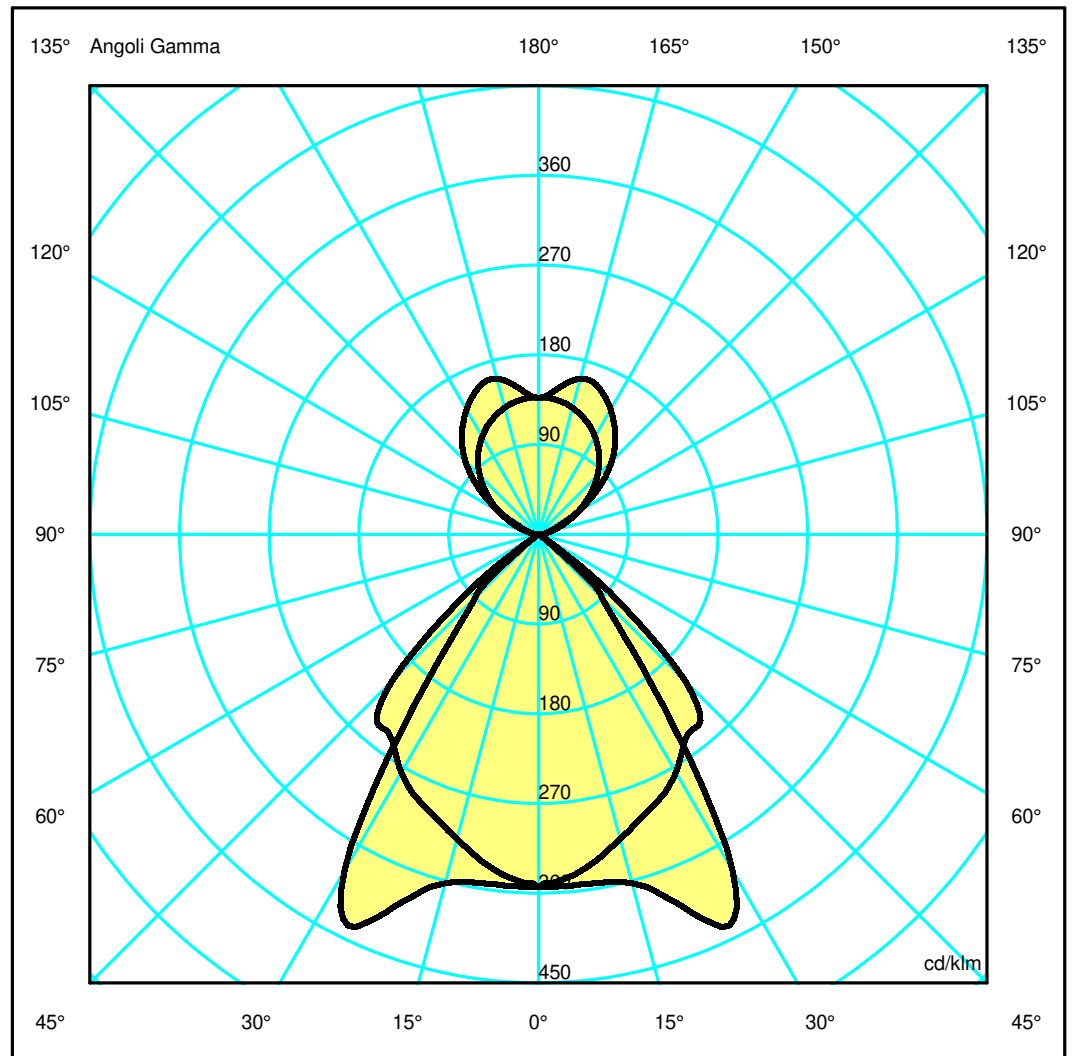

Luminaire

Code AY06005
Name SERIES Y-MOD.1200MM DARK+IND 930 SIL

Measurerm.

Code FTS1802395-A
Name SERIES Y-MOD.1200MM DARK+IND 930 SIL

Luminaire Flux	5132 lm	Luminaire Power	55.0 W	Efficacy	93.303 lm/W	Efficiency	100.00%
Source Flux	5132 lm	Maximum value	436.71 cd/klm	Position	C=0.00 G=26.00	CG	Double Symmetrical
Rectangular Luminaire		Length	1125 mm	Width	90 mm	Height	90 mm
Rectangular Luminous Area		Length	1120 mm	Width	75 mm	Height	0 mm
Horizontal Luminous Area		0.084000 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.020321 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		28-02-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		5132 lm	


LED Flux=7378lm LED Power=45W Eff=70% EfcLed=165lm/W EfcLum=93lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h

C.I.E.	82 99 100 59 100	D DIN 5040	C61
F UTE	0.59 B + 0.41 T	B NBN	BZ 1

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.72	1.44	2.16	2.88	3.60	OC	0.97	1.95	2.92	3.90	4.87
OB	0.72	1.44	2.16	2.88	3.60	OD	0.97	1.95	2.92	3.90	4.87

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	1815.65	1815.77	1859.63	2230.69	1224.51	461.90	28.67	18.39	14.64	6.53
OB	1815.65	1815.77	1859.63	2230.69	1224.51	461.90	28.67	18.39	14.64	6.53
OC	1815.65	1770.73	1621.65	1492.77	1307.61	1065.83	101.69	10.02	5.03	1.79
OD	1815.65	1770.73	1621.65	1492.77	1307.61	1065.83	101.69	10.02	5.03	1.79

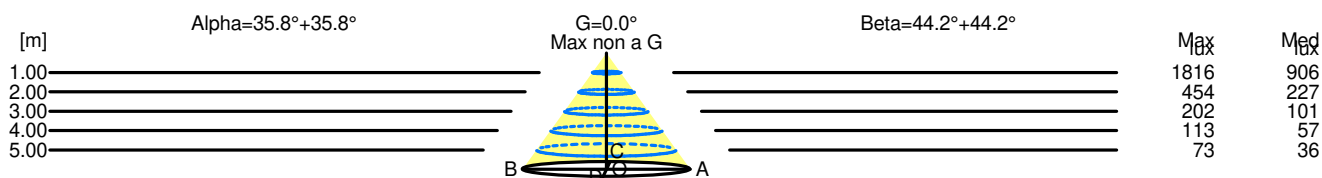

H[m]	D[m]	Max lux	Med lux	Alpha=35.8°+35.8°	G=0.0 Max non a G
1.00	1.44	1816	906		
2.00	2.88	454	227		
3.00	4.33	202	101		
4.00	5.77	113	57		
5.00	7.21	73	36		

H[m]	D[m]	Max lux	Med lux	Beta=44.2°+44.2°	G=0.0 Max non a G
1.00	1.95	1816	906		
2.00	3.90	454	227		
3.00	5.84	202	101		
4.00	7.79	113	57		
5.00	9.74	73	36		