


## Luminaire

Code AG05104  
Name SMARTOFFICE SUSPENSION DIR + IND 2249mm 940 DARKLIGHT N/D BLACK

## Measurerm.

Code FTS1603411  
Name SMARTOFFICE SUSPENSION DIR + IND 2249mm 940 DARKLIGHT N/D BLACK

Luminaire Flux	9128.00 lm	Luminaire Power	81.00 W	Efficacy	112.69 lm/W	Efficiency	100.00%
Lamps Flux	9128.00 lm	Maximum value	329.16 cd/klm	Position	C=50.00 G=4.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2249 mm	Width	65 mm	Height	90 mm
Rectangular Luminous Area		Length	2199 mm	Width	55 mm	Height	0 mm
Horizontal Luminous Area		0.120945 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.029259 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		26-04-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		9128.00 lm	
LED Flux=12000lm LED Power=66W Eff=76% EfcLed=182lm/W EfcLum=113lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	70 99 100 63 100			D DIN 5040	B51		
F UTE	0.63 C + 0.37 T			B NBN	BZ 2		

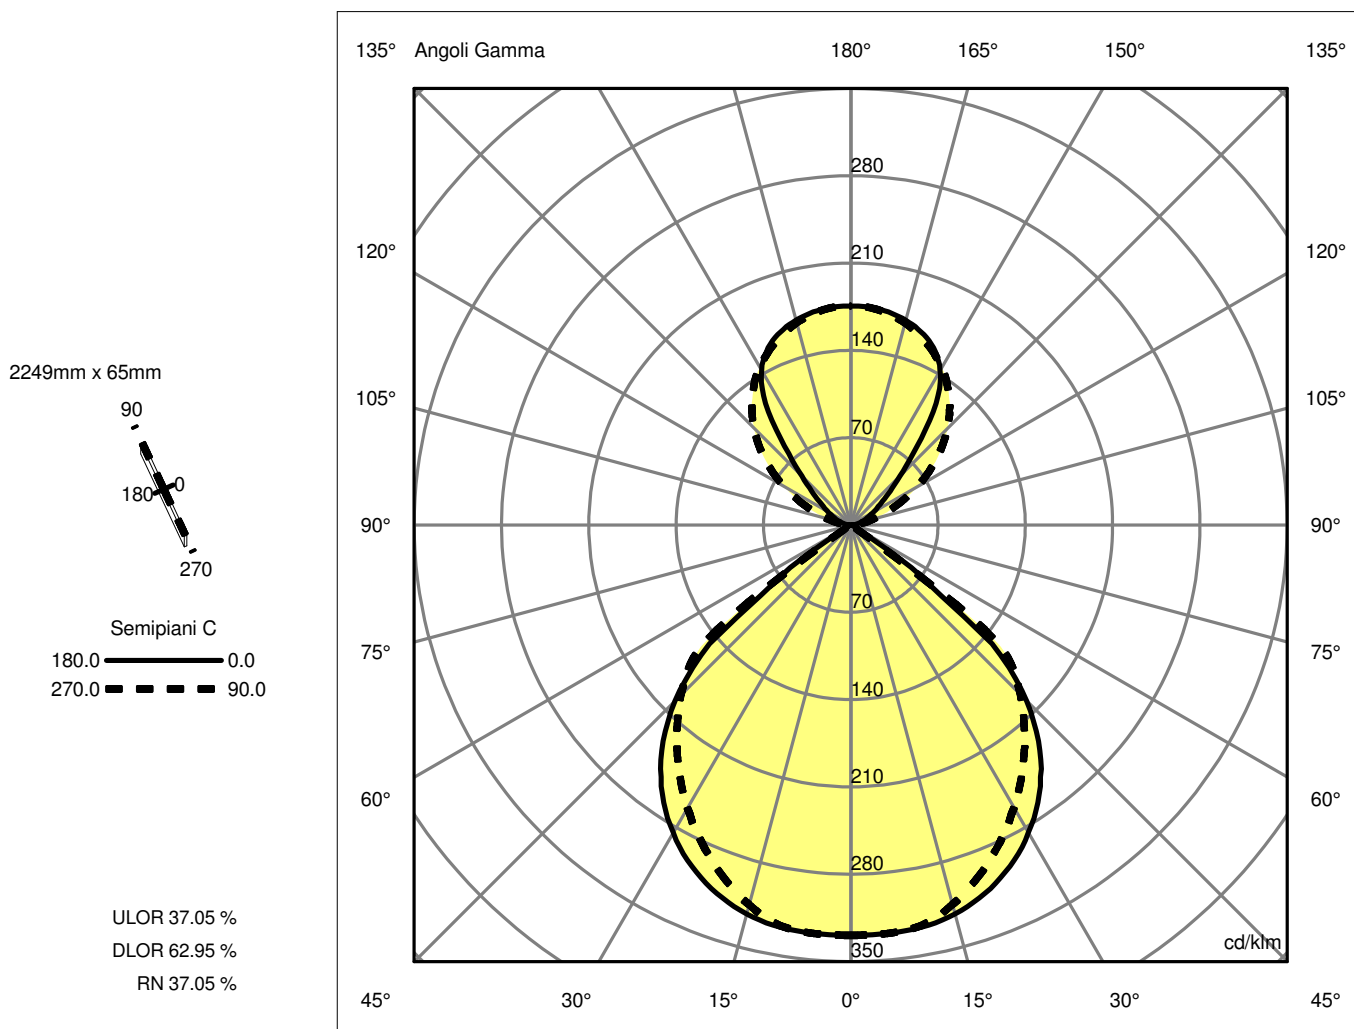

## Luminaire

Code AG05104  
Name SMARTOFFICE SUSPENSION DIR + IND 2249mm 940 DARKLIGHT N/D BLACK

## Measurment.


Code FTS1603411  
Name SMARTOFFICE SUSPENSION DIR + IND 2249mm 940 DARKLIGHT N/D BLACK

Luminaire Flux	9128.00 lm	Luminaire Power	81.00 W	Efficacy	112.69 lm/W	Efficiency	100.00%
Lamps Flux	9128.00 lm	Maximum value	329.16 cd/klm	Position	C=50.00 G=4.00	CG	Double Symmetrical
Rectangular Luminaire		Length	2249 mm	Width	65 mm	Height	90 mm
Rectangular Luminous Area		Length	2199 mm	Width	55 mm	Height	0 mm
Horizontal Luminous Area		0.120945 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.029259 m2	
Coordinate system		CG		Symmetry Type		Double Symmetrical	
Date		26-04-2017		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		9128.00 lm	
LED Flux=12000lm LED Power=66W Eff=76% EfcLed=182lm/W EfcLum=113lm/W Ra=80 SDCM=3 L70(6K)=50000h							
C.I.E.	70 99 100 63 100			D DIN 5040	B51		
F UTE	0.63 C + 0.37 T			B NBN	BZ 2		

### Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	1.13	2.26	3.39	4.53	5.66	OC	1.19	2.38	3.56	4.75	5.94
OB	1.13	2.26	3.39	4.53	5.66	OD	1.19	2.38	3.56	4.75	5.94

	Luminous Intensities [ cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	3002.06	3000.73	2945.19	2754.52	2404.42	1819.50	540.97	27.94	19.02	14.74
OB	3002.06	3000.73	2945.19	2754.52	2404.42	1819.50	540.97	27.94	19.02	14.74
OC	3002.06	3002.10	2876.59	2572.30	2190.57	1757.61	207.20	27.08	14.67	10.59
OD	3002.06	3002.10	2876.59	2572.30	2190.57	1757.61	207.20	27.08	14.67	10.59

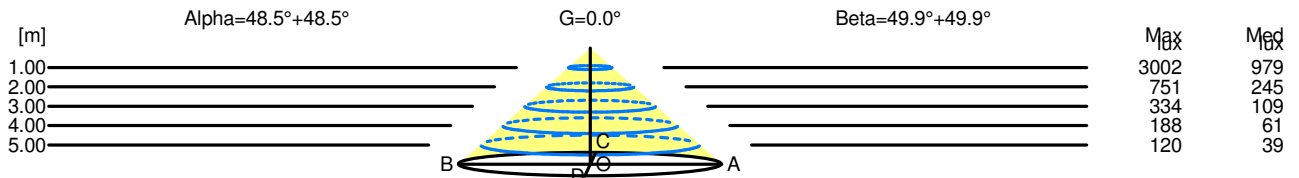

H[m]	D[m]	Max lux	Med lux	Alpha=48.5°+48.5°	G=0.0
1.00	2.26	3002	979		
2.00	4.53	751	245		
3.00	6.79	334	109		
4.00	9.05	188	61		
5.00	11.31	120	39		

H[m]	D[m]	Max lux	Med lux	Beta=49.9°+49.9°	G=0.0
1.00	2.38	3002	979		
2.00	4.75	751	245		
3.00	7.13	334	109		
4.00	9.50	188	61		
5.00	11.88	120	39		

**Luminaire**

Code AG05104  
 Name SMARTOFFICE SUSPENSION DIR + IND 2249mm 940 DARKLIGHT N/D BLACK

**Measurement**

Code FTS1603411  
 Name SMARTOFFICE SUSPENSION DIR + IND 2249mm 940 DARKLIGHT N/D BLACK

Luminaire Flux	9128.00 lm	Luminaire Power	81.00 W	Efficacy	112.69 lm/W	Efficiency	100.00%
Lamps Flux	9128.00 lm	Maximum value	329.16 cd/klm	Position	C=50.00 G=4.00	CG	Double Symmetrical

**UGR**  
 S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	17.5	18.3	18.3	19.0	19.9	17.5	18.3	18.2	19.0	19.9
x=2H y=3H	17.3	18.0	18.1	18.7	19.6	17.3	17.9	18.0	18.7	19.6
x=2H y=4H	17.2	17.8	18.0	18.6	19.5	17.1	17.7	17.9	18.5	19.5
x=2H y=6H	17.1	17.6	17.9	18.4	19.4	17.0	17.6	17.8	18.4	19.4
x=2H y=8H	17.0	17.5	17.8	18.3	19.3	16.9	17.5	17.8	18.3	19.3
x=2H y=12H	16.9	17.5	17.8	18.3	19.2	16.9	17.4	17.7	18.2	19.2
x=4H y=2H	17.3	17.9	18.1	18.7	19.6	17.2	17.8	18.0	18.6	19.6
x=4H y=3H	17.0	17.5	17.8	18.3	19.3	17.0	17.5	17.8	18.3	19.3
x=4H y=4H	16.9	17.3	17.8	18.2	19.2	16.8	17.3	17.7	18.1	19.2
x=4H y=6H	16.8	17.1	17.7	18.0	19.0	16.7	17.1	17.6	18.0	19.0
x=4H y=8H	16.7	17.0	17.6	17.9	18.9	16.6	17.0	17.5	17.9	18.9
x=4H y=12H	16.7	17.0	17.6	17.9	18.9	16.6	16.9	17.5	17.8	18.9
x=8H y=4H	16.7	17.0	17.6	17.9	18.9	16.6	17.0	17.5	17.9	18.9
x=8H y=6H	16.6	16.8	17.5	17.7	18.8	16.5	16.8	17.4	17.7	18.8
x=8H y=8H	16.5	16.7	17.4	17.7	18.7	16.5	16.7	17.4	17.6	18.7
x=8H y=12H	16.5	16.7	17.4	17.6	18.7	16.4	16.6	17.3	17.5	18.7
x=12H y=4H	16.6	16.9	17.5	17.8	18.9	16.6	16.9	17.5	17.8	18.9
x=12H y=6H	16.5	16.7	17.4	17.6	18.7	16.4	16.7	17.4	17.6	18.7
x=12H y=8H	16.4	16.6	17.4	17.6	18.7	16.4	16.6	17.3	17.5	18.7