


Luminaire

Code 1405040A
Name GOPLE LAMP S RAME metallizz.


Measur.

Code FTS1900817-A
Name GOPLE LAMP S RAME metallizz.

Luminaire Flux	903 lm	Luminaire Power	17.0 W	Efficacy	53.112 lm/W	Efficiency	45.60%
Source Flux	1980 lm	Maximum value	168.48 cd/klm	Position	C=180.00 G=3.00	CG	Asymmetrical
Round Luminaire		Diam.	220 mm	Height	410 mm		
Round Luminous Area		Diam.	220 mm	Height	410 mm		
Horizontal Luminous Area		0.038013 m ²		Emitting area on Plane 180°		0.090200 m ²	
Emitting area on Plane 0°		0.090200 m ²		Emitting area on Plane 270°		0.090200 m ²	
Emitting area on Plane 90°		0.090200 m ²		Glare area at 76°		0.096717 m ²	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		17-01-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1980 lm	
Lamping=LED 1x17W (E27) CCT=3000K CRI=80							
C.I.E.	42 67 88 91 46			D DIN 5040	A31		
F UTE	0.42 G + 0.04 T			B NBN	BZ 5 / 1.5 / BZ 6		

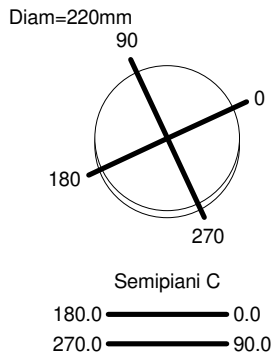

ULOR 3.88 %
DLOR 41.72 %
RN 8.51 %

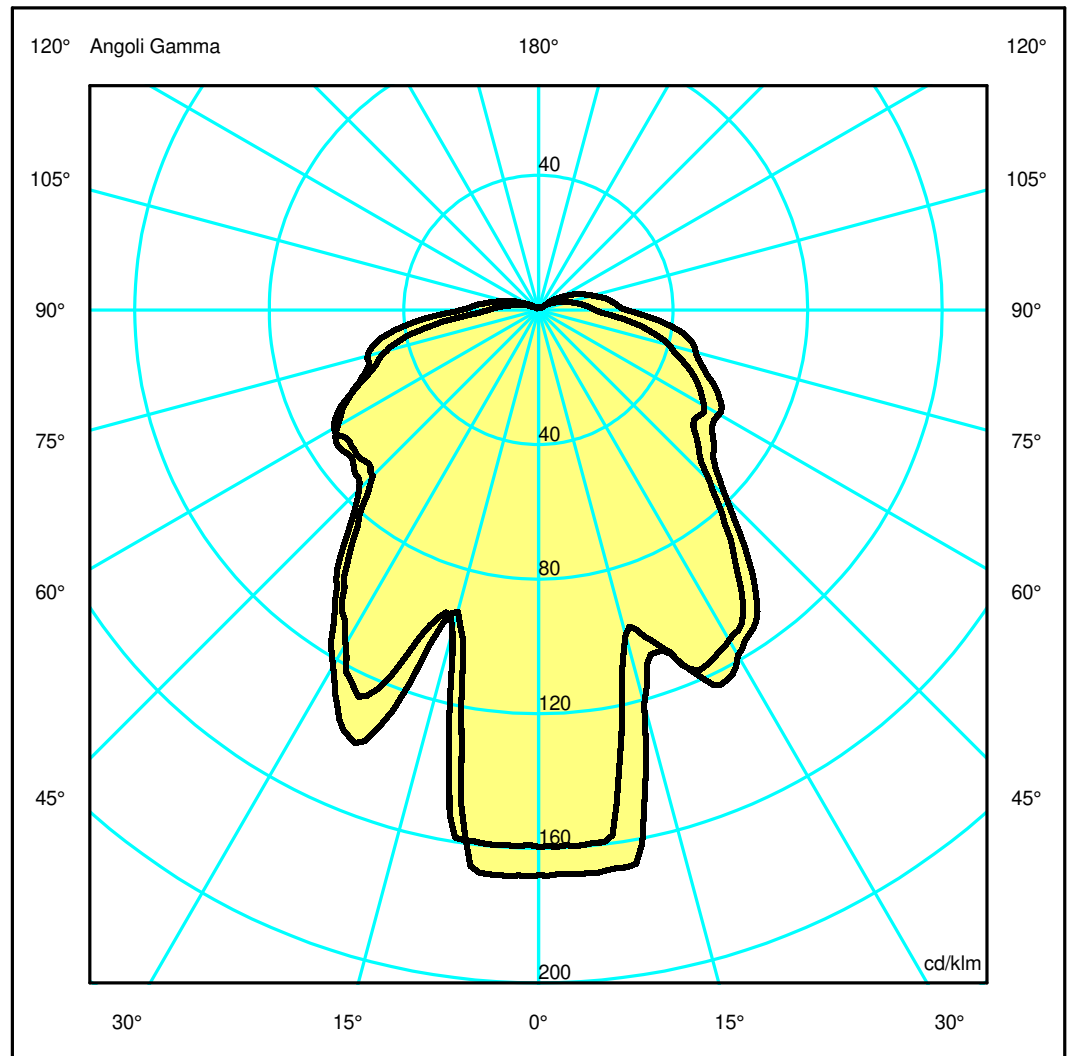

Luminaire

Code 1405040A
Name GOPLE LAMP S RAME metallizz.

Measurerm.


Code FTS1900817-A
Name GOPLE LAMP S RAME metallizz.

Luminaire Flux	903 lm	Luminaire Power	17.0 W	Efficacy	53.112 lm/W	Efficiency	45.60%
Source Flux	1980 lm	Maximum value	168.48 cd/klm	Position	C=180.00 G=3.00	CG	Asymmetrical
Round Luminaire		Diam.	220 mm	Height	410 mm		
Round Luminous Area		Diam.	220 mm	Height	410 mm		
Horizontal Luminous Area		0.038013 m2		Emitting area on Plane 180°		0.090200 m2	
Emitting area on Plane 0°		0.090200 m2		Emitting area on Plane 270°		0.090200 m2	
Emitting area on Plane 90°		0.090200 m2		Glare area at 76°		0.096717 m2	
Coordinate system		CG		Symmetry Type		Asymmetrical	
Date		17-01-2022		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1980 lm	
Lamping=LED 1x17W (E27) CCT=3000K CRI=80							
C.I.E.	42 67 88 91 46			D DIN 5040	A31		
F UTE	0.42 G + 0.04 T			B NBN	BZ 5 / 1.5 / BZ 6		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.94	1.89	2.83	3.78	4.72	OC	0.87	1.74	2.61	3.48	4.35
OB	0.88	1.77	2.65	3.53	4.42	OD	0.83	1.67	2.50	3.33	4.17

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	332.60	332.54	240.20	243.39	223.18	156.06	124.54	116.48	95.71	71.12
OB	332.60	333.35	183.69	272.15	209.02	149.45	142.23	123.65	92.36	45.30
OC	315.85	315.75	197.68	231.44	209.44	142.43	111.95	103.52	79.92	46.37
OD	315.85	315.70	195.91	251.01	199.05	138.07	135.50	125.07	104.13	71.09

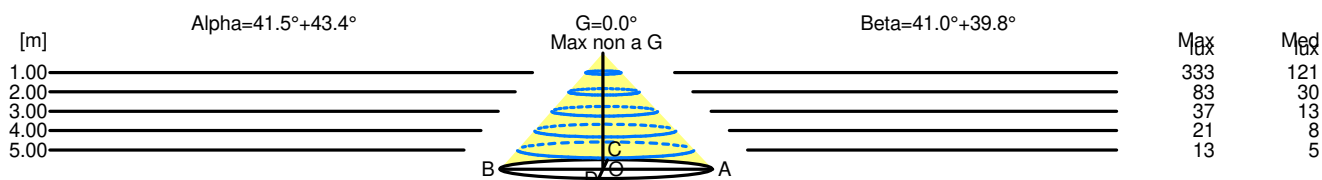

H[m]	D[m]	Max lux	Med lux	Alpha=41.5°+43.4°	G=0.0° Max non a G
1.00	1.83	333	121		
2.00	3.66	83	30		
3.00	5.48	37	13		
4.00	7.31	21	8		
5.00	9.14	13	5		

H[m]	D[m]	Max lux	Med lux	Beta=39.8°+41.0°	G=0.0° Max non a G
1.00	1.70	333	121		
2.00	3.41	83	30		
3.00	5.11	37	13		
4.00	6.82	21	8		
5.00	8.52	13	5		