

Luminaire

Code AN10715+AP91300
Name VECTOR 55 TRACK 930 FL DALI BR.SILVER + SOFT FILTER

Measurement

Code FTS1800290-A
Name VECTOR 55 TRACK 930 FL DALI BR.SILVER + SOFT FILTER

Luminaire Flux	1374 lm	Luminaire Power	25.0 W	Efficacy	54.967 lm/W	Efficiency	100.00%
Source Flux	1374 lm	Maximum value	3862.92 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-10-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1374 lm	
LED Flux=2346lm LED Power=21W Eff=59% EfcLed=112lm/W EfcLum=55lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	98 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Diam=55mm




Semipiani C

180.0 ——— 0.0

ULOR 0.00 %

DLOR100.00 %

RN 0.00 %

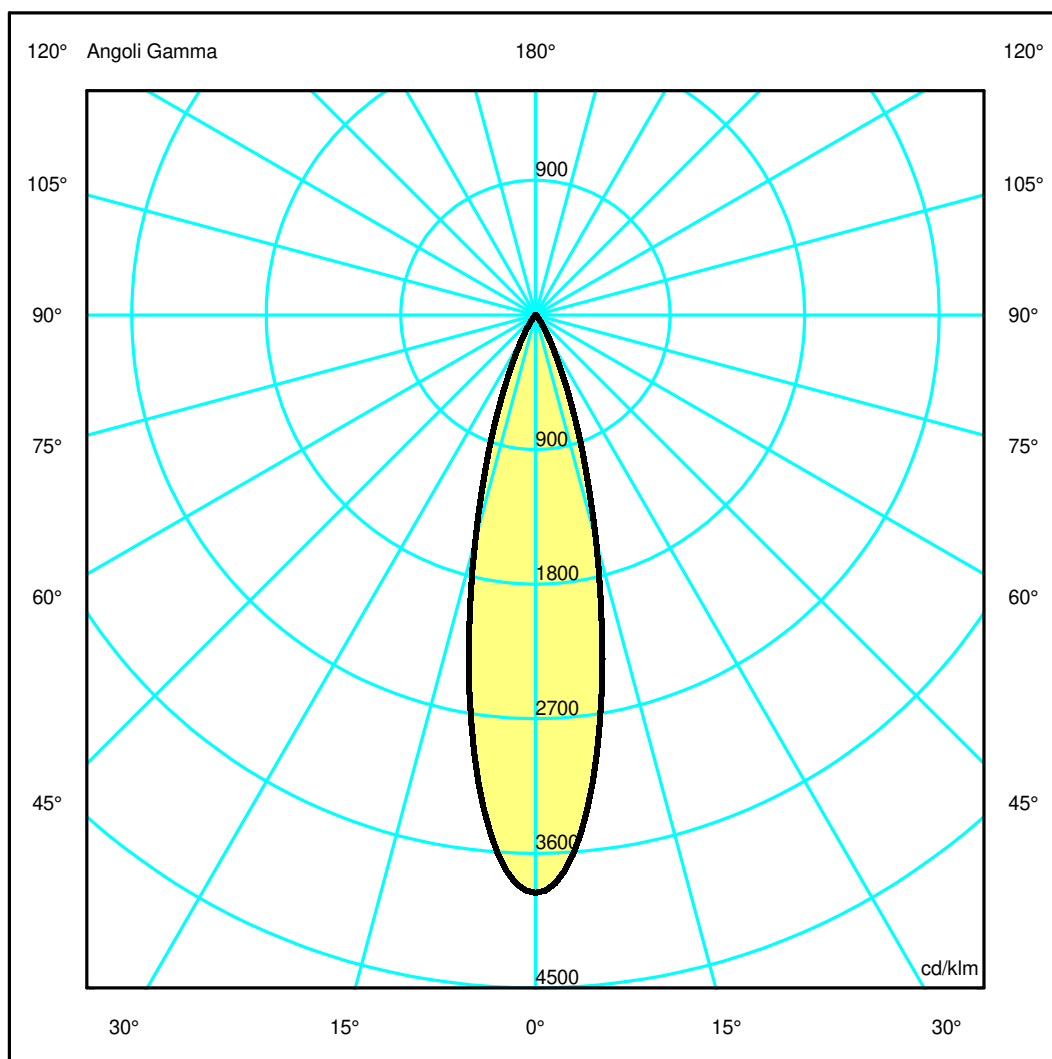

Luminaire

Code AN10715+AP91300
Name VECTOR 55 TRACK 930 FL DALI BR.SILVER + SOFT FILTER

Measurerm.


Code FTS1800290-A
Name VECTOR 55 TRACK 930 FL DALI BR.SILVER + SOFT FILTER

Luminaire Flux	1374 lm	Luminaire Power	25.0 W	Efficacy	54.967 lm/W	Efficiency	100.00%
Source Flux	1374 lm	Maximum value	3862.92 cd/klm	Position	C=0.00 G=0.00	CG	Rotosymmetrical
Round Luminaire		Diam.	55 mm	Height	130 mm		
Round Luminous Area		Diam.	46 mm	Height	0 mm		
Horizontal Luminous Area		0.001662 m2		Emitting area on Plane 180°		0.000000 m2	
Emitting area on Plane 0°		0.000000 m2		Emitting area on Plane 270°		0.000000 m2	
Emitting area on Plane 90°		0.000000 m2		Glare area at 76°		0.000402 m2	
Coordinate system		CG		Symmetry Type		Rotosymmetrical	
Date		20-10-2021		Maximum Gamma Angle		180	
Measurement Distance		0.00		Measurement Flux		1374 lm	
LED Flux=2346lm LED Power=21W Eff=59% EfcLed=112lm/W EfcLum=55lm/W CCT=3000K Ra=90 R9=50 SDCM=3 L70(6K)=50000h							
C.I.E.	98 99 100 100 100			D DIN 5040	A60		
F UTE	--			B NBN	BZ 1		

Width at 50.00 % of Max Intensity

H[m]	1.00	2.00	3.00	4.00	5.00	H[m]	1.00	2.00	3.00	4.00	5.00
OA	0.23	0.46	0.69	0.92	1.16	OC	0.23	0.46	0.69	0.92	1.16
OB	0.23	0.46	0.69	0.92	1.16	OD	0.23	0.46	0.69	0.92	1.16

	Luminous Intensities [cd/klm]									
	0	5	15	25	35	45	55	65	75	85
OA	5308.34	4777.86	2142.13	545.07	103.62	21.69	7.89	5.63	3.50	0.80
OB	5308.34	4777.86	2142.13	545.07	103.62	21.69	7.89	5.63	3.50	0.80
OC	5308.34	4777.86	2142.13	545.07	103.62	21.69	7.89	5.63	3.50	0.80
OD	5308.34	4777.86	2142.13	545.07	103.62	21.69	7.89	5.63	3.50	0.80

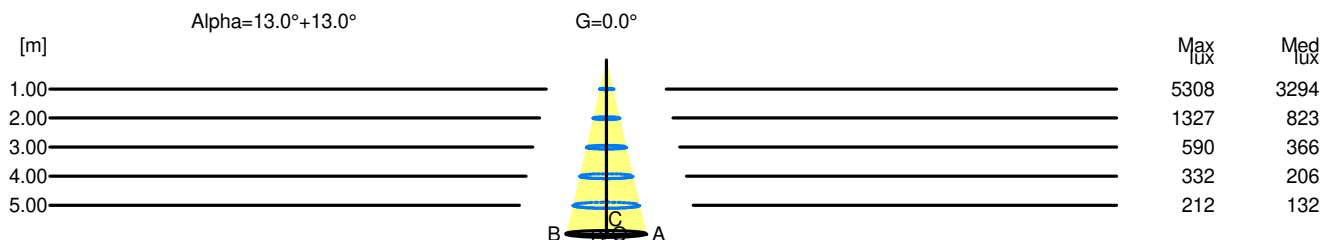

H[m]	D[m]	Max lux	Med lux	Alpha=13.0°+13.0°	G=0.0
1.00	0.46	5308	3294		
2.00	0.92	1327	823		
3.00	1.39	590	366		
4.00	1.85	332	206		
5.00	2.31	212	132		